

VOLUME 21

AG TIRES



- > **TITAN AGRAEDGE** (LEFT)
New high-performing, cost-competitive Titan-branded R-1W line developed with a modern design
- > **GOODYEAR OPTITORQUE** (RIGHT)
Ideal for front position on four-wheel spreaders, flotation options on sprayers and tractors



> CONTENTS

Intro to Ag Tires

Tire Markings	2
Tire Construction: Radial & Bias	3
The Acronyms of Ag Tires	4
ECE Certification	4

Tire Information

Industry Standards & Tire Selection Chart	5
International Load Index Numbers	6
Liquid Weighing of Tractor Tires	7
Radial Farm Tires RCI Chart	8

Goodyear Farm Tires 9

Titan Farm Tires 159

Safety Section S:1



TIRE MARKINGS

How to Read a Tire

It's essential to understand tire markings to eliminate the risk of fitting unsuitable tires to your machine.

The **tire size** can be found on the sidewall of the tire and is a sequence of numbers and letters. It can be written in either Code Designation or Metric Designation. Code Designation uses a nominal code for the section width which is historically based on the tire width in inches. Metric Designation denotes the tire width in mm.

Code Designation

18.4 - 42

Nominal Section Width (inches) | Bias | Nominal Rim Diameter (inches)

- A Diagonal (**bias**) tire is indicated by a dash (-) or **D**. Diagonal Tires are constructed with the cord plies at angles of 30-40 degrees, with successive plies laid at opposing angles forming a crisscross pattern
- **Nominal rim diameter** is the size of the wheel rim that the tire can be fitted to


Metric Designation

320/90R46

Nominal Section Width (mm) | Nominal Aspect Ratio (%) | Radial | Nominal Rim Diameter (inches)

- The **aspect ratio** of the tire sidewall is expressed as a percentage of the tire width. So, an aspect ratio of 70 means that the sidewall height of the tire is 70% of its width
- **Radial** tires are marked with the letter **R** and are constructed with the cord plies positioned at a 90 degree angle of direction travel

Sidewall Markings

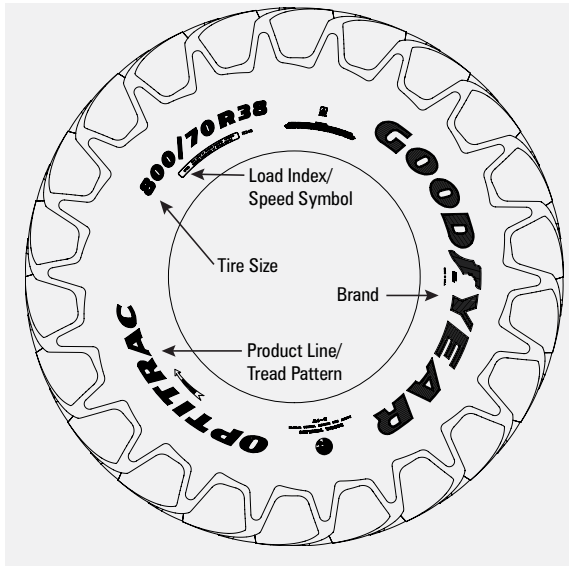


- On Implement Tires, the word 'IMPLEMENT' is marked on the sidewall or letters IMP marked after the Nominal Rim code
- On Construction Tires, the suffix IND is marked after the nominal rim diameter or can be replaced by the marking R-4
- IF and VF tires are marked with a prefix. CFO tires are marked with a suffix (example - IF800/70R38CFO)
- Application symbols are added to indicate whether the tire is suitable for use on a drive wheel, free rolling or for mixed application. These symbols are positioned after the service description.

Drive Wheel 107 A8

Mixed Application 107 A8



Free Rolling 120 A8

Tire Dimensions

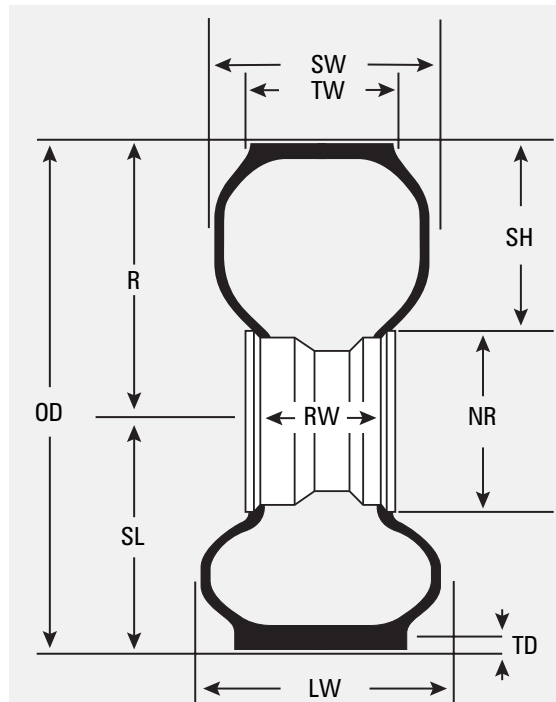

SW Section Width
TW Tread Width
SH Section Height
NR Nominal Rim Diameter
SL Static Loaded Radius
LW Loaded Width
TD Tread Depth

TIRE CONSTRUCTION: RADIAL & BIAS

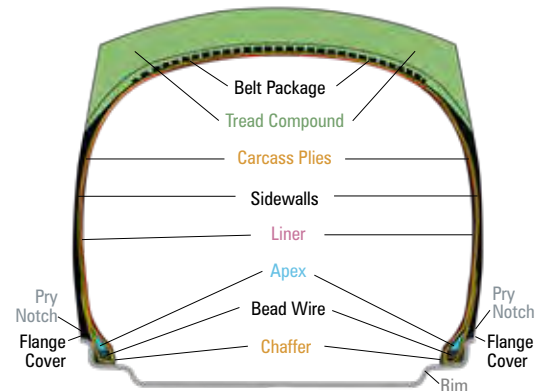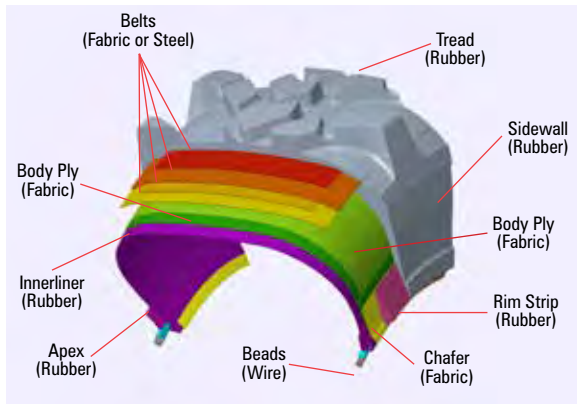


Radial Ply

The plies of a **radial tire** run parallel to each other from bead to bead at right angles to the tread center-line. Radial tires have belts (stabilizer plies) beneath the tread at a small angle to the tread center-line. Most of the flexing will occur in the tire sidewall area. Radial tire construction generates less heat due to less belt friction.




Bias Ply

The carcass of a **bias tire** consists of layers of fabric with cords (plies) that run diagonally from bead to bead at an angle. The crisscrossing of the body plies creates relatively stiff sidewalls. Bias tires generate more heat due to the friction they create. Generally this tire construction will not make continual, flat contact with the ground.

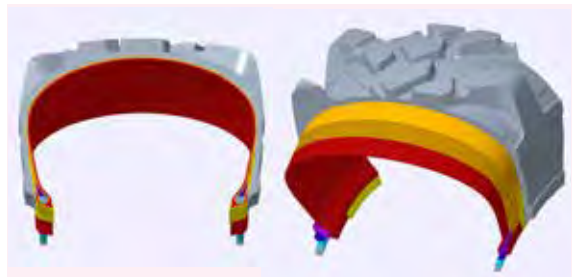


Radial Footprint Profile

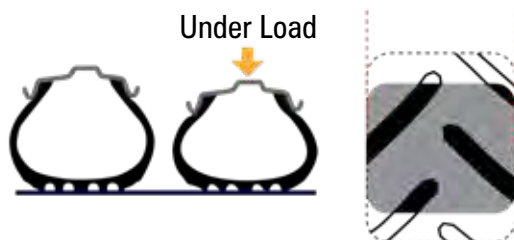

- Radial tire treads and sidewalls work **independently** allowing the footprint to lengthen and widen. Lugs remain stable through the footprint reducing the chance of rutting and minimizing soil compaction.
- Larger area of contact will contribute to less ground bearing pressure.

Bias Footprint Profile

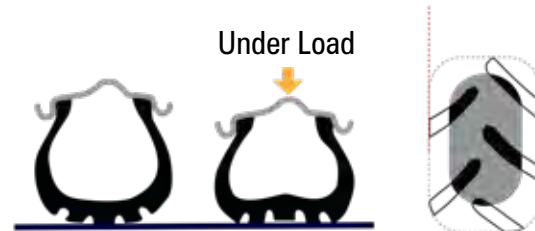

- Bias tire treads and sidewalls work **as one** causing lugs to move and squirm.
- Small area of contact will contribute to higher ground bearing pressure.

THE ACRONYMS OF AG TIRES

Acronym	TRA Tire and Rim Association	IF Increased Flexion	VF Very High Flexion	CFO Cyclical Field Operation	LSW[®] Low Sidewall Technology	UFT[™] Ultimate Flex Technology
Description	The standardizing body for the tire, rim, valve and allied parts industry in the United States. Called for IF/VF/CFO being standard across all brands.	Carries 20 percent higher loads at same inflation pressure as standard tires or same loads at 20 percent lower inflation pressure as standard tires.	Carries 40 percent higher loads at same inflation pressure as standard tires or same loads at 40 percent lower inflation pressure as standard tires.	Handles 55 percent higher loads when traveling less than 10 mph, for use on combines and grain carts.	Larger rim diameter than standard tires, meets TRA standards for VF/CFO in terms of load/inflation capabilities.	UFT combines the elements of conventional, Increased Flexion (IF) and Very High Flexion (VF) tires to create a universal solution for tire replacements. Meets TRA standards for conventional (standard)/IF/VF in terms of load/inflation capabilities.
Benefit		Reduces soil compaction when properly inflated.	Reduces soil compaction when properly inflated.	Reduces soil compaction and reduces need to adjust inflation during significant changes in weight during harvest.	Reduces soil compaction when properly inflated, minimizes road lobe and power hop regardless of inflation pressures.	Approved to run at up to 40% lower inflation pressures than a standard tire, UFT helps reduce soil compaction — providing all the benefits of VF. This results in a single tire that can replace three different tire technologies.
Caveats		Only effective if pressure is adequately maintained by application and weight, increased flex can cause problems with road lobe and power hop quality if inflation is not maintained.	Only effective if pressure is adequately maintained by application and weight, increased flex can cause problems with road lobe and power hop quality if inflation is not maintained.	Compaction reduction gains are only realized if proper inflation pressures are maintained.	Requires a larger wheel diameter.	UFT tires are recommended to match the inflation pressure of the other tires already installed on the machine.
Brands		Titan/Goodyear, Michelin, Firestone, Mitas, Trelleborg	Titan/Goodyear, Michelin, Firestone, Mitas, Trelleborg	Titan/Goodyear, Michelin, Firestone, Mitas, Trelleborg	Titan/Goodyear	Titan/Goodyear

ECE CERTIFICATION

The United Nations Economic Commission for Europe (UNECE) has regulatory requirements on certain agricultural tires. As a result, the marking in the photo to the right will start appearing on many Titan and Goodyear[®] Farm Tires. The marking is a requirement by the UNECE and is not an indication of any changes to how the tire is designed or built. This marking should not affect our dealers or the sales and use of these tires within the United States or Canada.

The UNECE type approval symbol certifies that the tire meets all applicable regulations, including the requirements that load index and speed symbol appear in its service description on the sidewall.

In order to be UNECE type approved, tires must conform to certain dimensional requirements, pass any relevant tests and have their manufacturing plant undergo periodic inspection and certification.

* Appears on tire catalog numbers on the forthcoming pages and denotes tires that are ECE certified.



Example of the ECE Marking
Note: The location of the marking on the tire may vary

INDUSTRY STANDARDS & TIRE SELECTION CHART

TIRE CODE

In the table below, a tire selection chart is provided with the code approved by the Tire and Rim Association for specific types of agricultural tires. (This code was created in the interest of simplifying reference to specific types of agricultural tires, regardless of the manufacturer's design name.) Goodyear and Titan agricultural tires reflect the appropriate code number on the tire sidewall, in the vicinity of the size stamping.

Code	Industry Tire Type	Tire Service	Goodyear Brand	Titan Brand
TRACTOR STEERING WHEEL TIRES				
F-1	Agricultural Single Rib Tread	Rice Farming		
F-2M	Agricultural Multiple-Rib Tread	General Farming	Dyna Rib	Tru-Trac Multi-Rib
F-2	Agricultural Multiple-Rib Tread		Triple Rib RS, Triple Rib HD	Tru-Trac Front Tractor
F-3	Industrial Multiple-Rib Tread	Light Industrial Service	Multi Rib, Laborer	
REAR TRACTOR TIRES				
R-1	Drive Wheel, Regular Tread	General Farming, Sprayer	UltraTorque Radial, DT730, Dura Torque, Dyna Torque II, Power Torque, R14T™, Optitorque	Hi-Traction Lug Radial, Hi-Traction Lug, Hi-Power Lug, Tru Power, Farm Tractor, Hi-Dratation Lug, Lift Rigger II
R-1W	Drive Wheel, Wet Traction Tread	Wet or Moist Soil	Super Traction Radial, Optitrac	AG49M, TT49V, AgraEDGE
R-2	Cane and Rice, Drive Wheel, Deep Tread	Wet Muck Sugar Cane Rice Farming	Custom Flo Grip, Special Sure Grip TD8, Special Sure Grip TD8 Radial, R14T	
R-3	Drive Wheel, Shallow Tread	Sandy or Volcanic Ash Soils Orchards Highway Mowing Golf Course Work Light Industrial Service	All Weather, All Weather Radial, SoftTrac, SFT105, R14T	Torc-Trac II Radial, Torc-Trac, Torc-Trac II, Multi-Trac C/S
R-4	Industrial Tractor, Drive Wheel, Intermediate Tread	Light Industrial Service Highway Mowing	IT515, IT520, IT525, IT530, R14T	Industrial Contractor, Industrial Tractor Lug
HIGH FLOTATION TIRES				
HF-1	High Flotation, Shallow Tread	Golf Course Work	Terra-Rib, Soffrac, SFT105	Soft Turf, Multi Trac C/S, Classic TX
HF-2	High Flotation, Regular Lug Tread	General Farming	Super Terra-Grip, Xtra-Trac	Flo-Trac Lug
HF-3	High Flotation, Deep Lug Tread	Wet or Moist Soil	Super Terra-Grip XT	
HF-4	High Flotation, Extra Deep Tread	Wet Muck	Custom Flo Grip	
GARDEN TRACTOR TIRES				
	Lug Type	Gardens		
	Universal Type	Lawn Mowers	Multi Trac C/S	
IMPLEMENT TIRES				
I-1	Rib Tread	Free Rolling Wheels	Rib Implement, Farm Utility, FS24, Radial Implement, Drill Rib	Dura-Life, Dura-Life Planter, Hi-Flotation, Packer, Stubble Guard Implement
I-2	Moderate Traction Implement	Drive or Free Rolling Wheels		
I-3	Traction Tread	Drive Wheels	Traction Implement, Super Flot, Sure Grip Traction, Contractor	AgraGROW, Contractor-T, Contractor II, Traction Implement, TI4022
I-6	Smooth Tread			
FI	Rib Tread with highway speed approval	Free Rolling Highway Speed Towed Implements	Farm Highway Service, Farm Highway Service II	Highway Implement


INTERNATIONAL LOAD INDEX NUMBERS

(NOT Applicable to Passenger car, light truck, or truck-bus tires)

Load Index	KG	LBS	Load Index	KG	LBS	Load Index	KG	LBS
40	140	310	111	1,090	2,400	182	8,500	18,700
41	145	320	112	1,120	2,470	183	8,750	19,300
42	150	330	113	1,150	2,540	184	9,000	19,800
43	155	340	114	1,180	2,600	185	9,250	20,400
44	160	355	115	1,215	2,680	186	9,500	20,900
45	165	365	116	1,250	2,760	187	9,750	21,500
46	170	375	117	1,285	2,830	188	10,000	22,000
47	175	385	118	1,320	2,910	189	10,300	22,700
48	180	395	119	1,360	3,000	190	10,600	23,400
49	185	410	120	1,400	3,080	191	10,900	24,000
50	190	420	121	1,450	3,200	192	11,200	24,700
51	195	430	122	1,500	3,300	193	11,500	25,400
52	200	440	123	1,550	3,420	194	11,800	26,000
53	206	455	124	1,600	3,520	195	12,150	26,800
54	212	465	125	1,650	3,640	196	12,500	27,600
55	218	480	126	1,700	3,740	197	12,850	28,300
56	224	495	127	1,750	3,860	198	13,200	29,100
57	230	505	128	1,800	3,960	199	13,600	30,000
58	236	520	129	1,850	4,080	200	14,000	30,900
59	243	535	130	1,900	4,180	201	14,500	32,000
60	250	550	131	1,950	4,300	202	15,000	33,100
61	257	565	132	2,000	4,400	203	15,500	34,200
62	265	585	133	2,060	4,540	204	16,000	35,300
63	272	600	134	2,120	4,680	205	16,500	36,400
64	280	615	135	2,180	4,800	206	17,000	37,500
65	290	640	136	2,240	4,940	207	17,600	38,600
66	300	660	137	2,300	5,080	208	18,000	39,700
67	307	675	138	2,360	5,200	209	18,500	40,800
68	315	695	139	2,430	5,360	210	19,000	41,900
69	325	715	140	2,500	5,520	211	19,000	43,000
70	335	740	141	2,575	5,680	212	20,000	44,100
71	345	760	142	2,650	5,840	213	20,600	45,400
72	355	785	143	2,725	6,000	214	21,200	46,700
73	365	805	144	2,800	6,150	215	21,800	48,100
74	375	825	145	2,900	6,400	216	22,400	49,400
75	387	855	146	3,000	6,600	217	23,000	50,700
76	400	880	147	3,075	6,800	218	23,600	52,000
77	412	910	148	3,150	6,950	219	24,300	53,600
78	425	935	149	3,250	7,150	220	25,000	55,100
79	437	965	150	3,350	7,400	221	25,750	56,800
80	450	990	151	3,450	7,600	222	26,500	58,400
81	462	1,020	152	3,550	7,850	223	27,250	60,000
82	475	1,050	153	3,650	8,050	224	28,000	61,500
83	487	1,070	154	3,750	8,250	225	29,000	64,000
84	500	1,100	155	3,875	8,550	226	30,000	66,000
85	515	1,140	156	4,000	8,800	227	30,750	68,000
86	530	1,170	157	4,125	9,100	228	31,500	69,500
87	545	1,200	158	4,250	9,350	229	32,500	71,500
88	560	1,230	159	4,375	9,650	230	33,500	74,000
89	580	1,280	160	4,500	9,900	231	34,500	76,000
90	600	1,320	161	4,625	10,200	232	35,500	78,500
91	615	1,360	162	4,750	10,500	233	36,500	80,500
92	630	1,390	163	4,875	10,700	234	37,500	82,500
93	650	1,430	164	5,000	11,000	235	38,760	85,600
94	670	1,480	165	5,150	11,400	236	40,000	88,000
95	690	1,520	166	5,300	11,700	237	41,250	91,000
96	710	1,570	167	5,450	12,000	238	42,500	93,500
97	730	1,610	168	5,600	12,300	239	43,750	96,500
98	750	1,650	169	5,800	12,800	240	45,000	99,000
99	775	1,710	170	6,000	13,200	241	46,250	102,000
100	800	1,760	171	6,150	13,600	242	47,500	104,500
101	825	1,820	172	6,300	13,900	243	48,750	107,500
102	850	1,870	173	6,500	14,300	244	50,000	110,000
103	875	1,930	174	6,700	14,800	245	51,500	113,500
104	900	1,980	175	6,900	15,200	246	53,000	117,000
105	925	2,040	176	7,100	15,700	247	54,500	120,000
106	950	2,090	177	7,300	16,100	248	56,000	123,000
107	975	2,150	178	7,500	16,500	249	58,000	128,000
108	1,000	2,200	179	7,750	17,100	250	60,000	132,000
109	1,030	2,270	180	8,000	17,600			
110	1,060	2,340	181	8,250	18,200			

LIQUID WEIGHING OF TRACTOR TIRES

Filling tires with liquid ballast is one of the most widely used methods of adding weight to the drive axle of a tractor. It is an economic and fairly simple solution. Prior to filling your tractor tires with added ballast please contact a Titan Dealer, Titan Sales Manager or Field Specialist. The tables for liquid filling tractor tires are now located on our website. Please use the QR Code on the right to access this information or visit <https://www.titan-intl.com/liquidfill>.



RADIAL FARM TIRES RCI CHART

Agricultural Tire RCI Chart (Row Crop)										Agricultural Tire RCI Chart (Flotation)										
RCI SRI	OD (mm)	Roll-Ing Circ.	NOMINAL SECTION WIDTH						NOMINAL SECTION WIDTH											
			<250	250/290	300/320	340/360	380/400	420/440	460/480	500/540	560/600	620/650	680/710	750/800	850/900	1000/1050	1100	1250	1400	
FRONT TIRE	REAR TIRE	Approx In	18	20	22	24	26	28	30	32	32	32	32	32	32	32	32	32	32	
MINIMUM RECOMMENDED ROW WIDTH			24	26	28	30	32	32	32	32	32	32	32	32	32	32	32	32	32	
50	1075 (4280)	269 (6845)																		
49	1025 (2184)	256 (6495)																		
48	975 (2057)	243 (6165)																		
47	925 (1956)	230 (5850)																		
46	875 (1854)	219 (5550)																		
45	825 (1778)	207 (5270)																		
44	800 (1676)	197 (5000)																		
43	750 (1600)	187 (4745)																		
42	700 (1499)	177 (4505)																		
41	675 (1422)	168 (4275)																		
40	650 (1346)	160 (4055)																		
39	600 (625)	51 (1295)																		
38	575 (1219)	48 (655)																		
37	550 (1168)	46 (3465)																		
36	525 (1092)	43 (3290)																		
35	500 (1041)	41 (3127)																		
34	475 (990)	39 (2930)																		
31	400 (838)	33 (2530)																		
29	360 (752)	30 (2292)																		

REAR RCI MINUS FRONT RCI

TYPICAL MECHANICAL GEAR RATIO

4

5

6

1.284

1.332

1.403

GOODYEAR FARM TIRES



MADE BY TITAN®



GOODYEAR FARM TIRES TABLE OF CONTENTS

Index by Size	12	Bias F-3	Goodyear Laborer F-3	127
Tread Patterns	16		Goodyear Multi Rib F-3.....	128
Radial LSW®		Bias & Radial I-1	Goodyear FS24 I-1	129
What is LSW Technology?.....	18		Goodyear Rib Implement I-1	132
Radial R14T	19		Goodyear Radial Implement I-1	133
R-1 Radial	19		Goodyear Drill Rib I-1	134
R-1W Radial.....	19		Goodyear Farm Utility I-1	135
R-2 Radial	20	Bias FI		
Radial UFT™			Goodyear Farm Highway Service FI.....	140
What is Ultimate Flex Technology?.....	21		Goodyear Farm Highway Service II FI.....	142
Bias & Radial R14T™		Bias & Radial I-3		
Goodyear R14T Crossover Tire	22		Goodyear Superflot I-3.....	143
Goodyear R14T Crossover Tire Development.....	33		Goodyear Sure Grip Traction I-3.....	144
Bias & Radial R-1, R-1W			Goodyear Traction Implement I-3.....	146
Goodyear Ultratorque Plus R-1	34		Goodyear Contractor-T I-3.....	147
Goodyear Ultratorque Radial R-1	35	Bias & Radial HF-1, HF-2, HF-3		
Goodyear Optitorque R-1	37		Goodyear SofTrac HF-1	148
Goodyear Ultra Sprayer R-1	44		Goodyear Tundra-Grip HF-1	150
Goodyear Dyna Torque Radial R-1	50		Goodyear SFT105 HF-1.....	150
Goodyear Dyna Torque II R-1	53		Goodyear Terra-Rib HF-1	151
Goodyear DT730 R-1.....	57		Goodyear Rib Terra HF-1	151
Goodyear Dura Torque R-1	57		Goodyear Super Terra-Grip HF-2	152
Goodyear Power Torque R-1	62		Goodyear Xtra-Trac HF-2.....	154
Goodyear DT930 R-1W.....	62		Goodyear Super Terra-Grip XT HF-2, HF-3.....	154
Goodyear Super Traction Radial R-1W	63	Skid Steer		
Goodyear Optitrac R-1W.....	65		Goodyear Sure Grip Lug SS, R-4, I-3	155
Goodyear Optiterra R-1W	98		Goodyear Sure Grip Loader	156
Bias & Radial R-2		Smooth		
Goodyear Custom Flo Grip R-2.....	99		Goodyear Smooth.....	157
Goodyear Special Sure Grip TD8 Radial R-2	103		Goodyear Smooth Implement	157
Goodyear Special Sure Grip TD8 R-2.....	108	Trailer/Specialty		
Bias & Radial R-3			Goodyear Power Cushion Trailer Service	158
Goodyear All Weather Radial R-3.....	110			
Goodyear All Weather R-3	111			
Goodyear All Weather Radial II R-3	114			
Goodyear SofTrac II R-3	115			
Goodyear SFT105 R-3.....	116			
Bias & Radial R-4				
Goodyear IT515 HS R-4	117			
Goodyear IT520 R-4	117			
Goodyear IT525 R-4	118			
Goodyear IT530 R-4	121			
Bias F-2, F-2M				
Goodyear Triple Rib RS F-2	122			
Goodyear Triple Rib HD F-2.....	123			
Goodyear Dyna Rib F-2M.....	125			

GOODYEAR FARM TIRES INDEX BY SIZE

RADIAL			
Inch	Tire Size	Tread Pattern	Pg.
15"	IF240/80R15IMP	Radial Implement I-1	133
15"	IF270/85R15IMP	Radial Implement I-1	133
15"	IF280/70R15IMP	Radial Implement I-1	133
15"	IF320/70R15IMP	Radial Implement I-1	134
16.5"	260/70R16.5	R14T™ R-4	25
16.5"	300/70R16.5	R14T R-4	27
16.5"	340/60R16.5IMP	FS24 I-1	129
16.5"	380/55R16.5IMP	FS24 I-1	130
16.5"	500/40R16.5IMP	FS24 I-1	131
17.5"	360/65R17.5IMP	FS24 I-1	129
18"	280/70R18	Optitrac R-1W	66
18"	340/65R18IMP	FS24 I-1	129
18"	440/55R18IMP	FS24 I-1	130
19.5"	380/70R19.5IMP	FS24 I-1	130
20"	320/85R20	R14T R-1	27
20"	320/85R20	Optitrac R-1W	66
20"	48X31.00R20	Super Terra-Grip XT HF-3	154
22.5"	480/55R22.5IMP	FS24 I-1	130
22.5"	600/50R22.5IMP	Superflot I-3	143
22.5"	710/40R22.5IMP	Superflot I-3	143
24"	320/85R24	R14T R-1	28
24"	320/85R24	Optitrac R-1W	67
24"	340/85R24	R14T R-1	28
24"	340/85R24	Optitrac R-1W	69
24"	380/70R24	Optitrac R-1W	69
24"	380/85R24	R14T R-1	29
24"	380/85R24	Optitrac R-1W	71
24"	420/70R24	Optitrac R-1W	72
24"	440/80R24	R14T R-4	30
24"	460/70R24IND	IT520 R-4	117
24"	500/70R24	IT530 R-4	121
24"	540/65R24	Optitrac R-1W	81
24"	540/65R34	Optitrac R-1W	82
24"	540/70R24	IT530 R-4	121
24"	LSW320/70R24	R14T R-1	28
24"	LSW320/70R24	Optitrac R-1W	66
25"	VF1000/50R25CFO	Optitorque R-1	43
26"	23.1R26	All Weather Radial II R-3	114
26"	28LR26	Super Traction Radial R-1W	64
26"	420/85R26	Dyna Torque Radial R-1	50
26"	480/80R26	All Weather Radial R-3	110
26"	480/85R26	Dyna Torque Radial R-1	51
26"	580/70R26	All Weather Radial R-3	110
26"	620/75R26	Optitrac R-1W	85
26"	750/50R26	Optitorque R-1	42
26"	750/65R26	Optitrac R-1W	90
26"	IF850/55R26CFO	Custom Flo Grip R-2	101
26"	IF850/60R26CFO	Optitrac R-1W	94
26"	VF620/75R26CFO	Optitrac R-1W	86
26"	VF750/65R26CFO	Custom Flo Grip R-2	100

RADIAL			
Inch	Tire Size	Tread Pattern	Pg.
26"	VF750/65R26CFO	Optitrac R-1W	91
28"	380/85R28	Optitrac R-1W	71
28"	420/70R28	Optitrac R-1W	73
28"	420/85R28	Special Sure Grip TD8 Radial R-2	103
28"	420/85R28	Optitrac R-1W	73
28"	600/65R28	Optitrac R-1W	83
28"	600/70R28	Optitrac R-1W	84
28"	IF600/65R28	Optitrac R-1W	83
28"	VF600/70R28CFO	Optitrac R-1W	84
28"	LSW320/70R28	R14T R-1	28
28"	LSW340/70R28	R14T R-1	29
28"	LSW380/70R28	R14T R-1	29
30"	380/85R30	Optitrac R-1W	71
30"	420/85R30	R14T R-1	30
30"	420/85R30	Optitrac R-1W	73
30"	420/90R30	UltraTorque R-1	35
30"	420/90R30	Dyna Torque Radial R-1	51
30"	420/90R30	Special Sure Grip TD8 Radial R-2	104
30"	460/85R30	R14T R-1	30
30"	460/85R30	Optitrac R-1W	76
30"	480/70R30	Optitrac R-1W	76
30"	480/85R30	Special Sure Grip TD8 Radial R-2	105
30"	600/70R30	Optitrac R-1W	84
30"	620/75R30	Optitrac R-1W	86
30"	LSW420/80R30	Optitrac R-1W	74
30"	LSW750/45R30	Optitrac R-1W	90
30"	LSW750/60R30	Optitrac R-1W	91
30"	LSW750/60R30	Custom Flo Grip R-2	100
30"	LSW850/50R30	Custom Flo Grip R-2	100
30"	LSW850/55R30	Optitrac R-1W	93
32"	650/75R32	Dyna Torque Radial R-1	52
32"	800/65R32	Optitrac R-1W	92
32"	900/60R32	Optitrac R-1W	95
32"	1050/50R32	Optiterra R-1W	98
32"	IF900/60R32CFO	Optitrac R-1W	95
32"	IF900/65R32CFO	Custom Flo Grip R-2	101
32"	IF1250/50R32CFO	Optitrac R-1W	97
32"	VF230/95R32	Optitorque R-1	38
32"	VF1050/50R32CFO	Optitorque R-1	43
32"	LSW1000/45R32	Optitrac R-1W	96
32"	LSW1100/35R32	Optitrac R-1W	96
34"	250/95R34	Super Traction Radial R-1W	63
34"	290/95R34	DT730 R-1	57
34"	320/85R34	Dyna Torque Radial R-1	50
34"	320/85R34	Super Traction Radial R-1W	63
34"	380/85R34	Optitrac R-1W	72
34"	420/85R34	Optitorque R-1	39
34"	420/85R34	Optitrac R-1W	74
34"	460/85R34	R14T R-1	31
34"	460/85R34	Optitrac R-1W	76

RADIAL			
Inch	Tire Size	Tread Pattern	Pg.
34"	480/70R34	Optitrac R-1W	77
34"	480/70R34	Special Sure Grip TD8 Radial R-2	104
34"	600/65R34	Optitrac R-1W	83
34"	650/75R34	Optitrac R-1W	87
34"	IF420/85R34	Optitrac R-1W	75
34"	VF420/85R34	Optitrac R-1W	75
34"	LSW420/75R34	R14T R-1	30
34"	LSW420/75R34	Optitrac R-1W	74
34"	LSW460/75R34	R14T R-1	31
38"	290/90R38	Super Traction Radial R-1W	63
38"	320/85R38	Super Traction Radial R-1W	64
38"	380/80R38	Optitorque R-1	38
38"	380/80R38	Optitrac R-1W	70
38"	420/85R38	Optitrac R-1W	75
38"	460/85R38	R14T R-1	31
38"	460/85R38	Optitrac R-1W	76
38"	480/80R38	UltraTorque R-1	35
38"	480/80R38	Dyna Torque Radial R-1	51
38"	480/80R38	Special Sure Grip TD8 Radial R-2	104
38"	480/80R38	All Weather Radial II R-3	114
38"	520/70R38	Optitrac R-1W	79
38"	520/85R38	UltraTorque Radial R-1	36
38"	520/85R38	Dyna Torque Radial R-1	52
38"	520/85R38	Optitrac R-1W	80
38"	520/85R38	Special Sure Grip TD8 Radial R-2	105
38"	650/65R38	Optitorque R-1	40
38"	650/65R38	Optitrac R-1W	86
38"	650/75R38	Optitrac R-1W	87
38"	650/85R38	Optitrac R-1W	88
38"	710/70R38	Optitrac R-1W	88
38"	800/70R38	Optitorque R-1	42
38"	800/70R38	Optitrac R-1W	92
38"	850/80R38	Optitrac R-1W	94
38"	IF380/80R38	Ultra Sprayer R-1	46
38"	IF380/80R38	Optitrac R-1W	70
38"	IF710/70R38CFO	Optitrac R-1W	89
38"	IF800/70R38CFO	Optitrac R-1W	93
38"	VF380/80R38	Optitrac R-1W	70
38"	VF650/65R38	Optitorque R-1	41
38"	LSW460/75R38	R14T R-1	31
42"	320/90R42	Optitrac R-1W	67
42"	380/80R42	Optitrac R-1W	70
42"	480/80R42	UltraTorque Plus R-1	34
42"	480/80R42	Optitrac R-1W	77
42"	480/80R42	Special Sure Grip TD8 Radial R-2	104
42"	520/85R42	Dyna Torque Radial R-1	52
42"	520/85R42	Optitrac R-1W	80
42"	520/85R42	Special Sure Grip TD8 Radial R-2	106
42"	580/85R42	Optitrac R-1W	82
42"	620/70R42	Optitrac R-1W	85
42"	650/65R42	Optitrac R-1W	87
42"	650/85R42	Optitrac R-1W	88
42"	710/70R42	Optitorque R-1	41
42"	710/70R42	Optitrac R-1W	89

RADIAL			
Inch	Tire Size	Tread Pattern	Pg.
42"	710/75R42	Optitrac R-1W	90
42"	IF320/80R42	Optitrac R-1W	66
42"	IF320/90R42	Ultra Sprayer R-1	45
42"	IF520/85R42CFO	Optitrac R-1W	80
42"	IF520/85R42CFO	Special Sure Grip TD8 Radial R-2	106
42"	IF580/85R42CFO	Optitrac R-1W	82
42"	IF710/70R42CFO	Optitrac R-1W	89
42"	IF850/75R42CFO	Optitrac R-1W	94
42"	VF320/90R42	Optitrac R-1W	67
42"	VF580/85R42CFO	Custom Flo Grip R-2	100
42"	LSW460/75R42	R14T R-1	32
42"	LSW650/60R42	Optitrac R-1W	86
42"	LSW680/55R42	Optitorque R-1	41
42"	LSW800/50R42	Optitrac R-1W	92
42"	LSW900/50R42	Custom Flo Grip R-2	101
42"	LSW900/60R42	Optitrac R-1W	96
46"	320/90R46	Special Sure Grip TD8 Radial R-2	103
46"	320/90R46	Optitrac R-1W	68
46"	340/85R46	Special Sure Grip TD8 Radial R-2	103
46"	380/85R46	Dyna Torque Radial R-1	50
46"	420/80R46	UltraTorque R-1	35
46"	480/80R46	UltraTorque Plus R-1	34
46"	480/80R46	Dyna Torque Radial R-1	51
46"	480/80R46	Optitrac R-1W	78
46"	480/80R46	Special Sure Grip TD8 Radial R-2	105
46"	520/85R46	Optitrac R-1W	80
46"	520/85R46	Special Sure Grip TD8 Radial R-2	106
46"	620/70R46	Optitrac R-1W	85
46"	IF320/90R46	Ultra Sprayer R-1	45
46"	VF380/90R46	Ultra Sprayer R-1	46
46"	VF520/85R46	Optitrac R-1W	81
46"	*UFT380/90R46	Ultra Sprayer R-1	48
46"	LSW480/70R46	Optitrac R-1W	77
46"	LSW710/60R46	Optitrac R-1W	90
46"	LSW710/65R46	Optitorque R-1	41
46"	LSW800/55R46	Optitorque R-1	42
46"	LSW800/55R46	Optitrac R-1W	93
46"	LSW900/50R46	Optitrac R-1W	94
46"	LSW1100/45R46	DT930 R-1W	62
46"	LSW1100/45R46	Optitrac R-1W	96
46"	LSW1250/35R46	Optitrac R-1W	97
46"	LSW1250/35R46	Custom Flo Grip R-2	102
46"	LSW1400/30R46	Optitrac R-1W	98
48"	VF230/95R48	Optitorque R-1	38
50"	320/90R50	Optitrac R-1W	68
50"	380/90R50	Optitrac R-1W	72
50"	480/80R50	Optitorque R-1	39
50"	480/80R50	Optitrac R-1W	78
50"	480/95R50	Optitrac R-1W	79
50"	520/85R50	Optitrac R-1W	81
50"	IF380/90R50	Ultra Sprayer R-1	47
50"	IF480/80R50	Optitrac R-1W	78
50"	VF320/90R50	Ultra Sprayer R-1	45
50"	VF380/105R50	Ultra Sprayer R-1	47

*Coming Soon

RADIAL			
Inch	Tire Size	Tread Pattern	Pg.
50"	VF420/95R50	Optitorque R-1	39
50"	VF480/80R50	Optitorque R-1	40
50"	VF480/80R50	Optitrac R-1W	79
50"	*UFT380/105R50	Ultra Sprayer R-1	48
54"	320/90R54	Optitrac R-1W	68
54"	320/105R54	Optitrac R-1W	68
54"	320/125R54	Optitrac R-1W	69
54"	380/90R54	Super Traction Radial R-1W	64
54"	380/90R54	Optitrac R-1W	72
54"	380/105R54	Optitorque R-1	38
54"	IF320/90R54	Ultra Sprayer R-1	45
54"	IF320/105R54	Ultra Sprayer R-1	46
54"	IF380/90R54	Ultra Sprayer R-1	47
54"	LSW480/70R54	Optitorque R-1	40

*Coming Soon

BIAS			
Inch	Tire Size	Tread Pattern	Pg.
8"	18x9.50-8NHS	Rib Terra HF-1	151
10"	9.00-10NHS	Multi Rib F-3	128
10"	18x8.50-10NHS	R14T R-1	23
12"	23x8.50-12NHS	R14T R-1	23
12"	23x8.50-12NHS	Power Cushion Trailer Service	158
12"	25x10.00-12NHS	SofTrac HF-1	148
12"	26x12.00-12NHS	R14T R-1	23
12"	7-12	Dyna Torque II R-1	53
14"	6-14	Dura Torque R-1	57
14"	8.5L-14SL	Farm Utility I-1	135
14"	11L-14SL	Farm Utility I-1	136
14"	25x8.50-14NHS	R14T R-1	23
14"	25x8.50-14NHS	SofTrac HF-1	148
15"	5.00-15SL	Triple Rib RS F-2	122
15"	5.00-15SL	Traction Implement I-3	146
15"	5.90-15SL	Traction Implement I-3	146
15"	6.70-15SL	Sure Grip Traction I-3	144
15"	7.60-15SL	Farm Utility I-1	135
15"	7.60-15SL	Sure Grip Traction I-3	144
15"	9.5L-15SL	Farm Utility I-1	136
15"	9.5L-15FI	Farm Highway Service FI	140
15"	10.00-15SL	Farm Utility I-1	136
15"	10.00-15FI	Farm Highway Service FI	140
15"	11L-15SL	Laborer F-3	127
15"	11L-15SL	Farm Utility I-1	137
15"	11L-15FI	Farm Highway Service II FI	142
15"	11L-15SL	Triple Rib HD F-2	124
15"	11L-15SL	Smooth Implement I-1	157
15"	12.5L-15SL	Farm Utility I-1	138
15"	12.5L-15FI	Farm Highway Service II FI	142
15"	12.5L-15SL	Sure Grip Traction I-3	144
15"	25x10.50-15NHS	SofTrac HF-1	148
15"	27x8.50-15NHS	R14T R-1	24
15"	27x8.50-15NHS	Sure Grip Lug SS	155
15"	29x9.50-15NHS	R14T R-1	24

BIAS			
Inch	Tire Size	Tread Pattern	Pg.
15"	29x12.50-15NHS	Super Terra-Grip HF-2	152
15"	31x13.50-15NHS	Terra-Rib HF-1	151
15"	31x15.50-15NHS	SofTrac HF-1	149
15"	31x15.50-15NHS	Xtra-Trac HF-2	154
15"	33x12.50-15NHS	SofTrac HF-1	149
16"	6.50-16SL	Triple Rib HD F-2	123
16"	7-16	Dura Torque R-1	58
16"	7.2-16	Power Torque R-1	62
16"	7.50-16SL	Triple Rib HD F-2	123
16"	8.3-16	Power Torque R-1	62
16"	9.5-16	Dura Torque R-1	58
16"	9.5-16	All Weather R-3	111
16"	10.00-16SL	Triple Rib HD F-2	123
16"	10.00-16SL	Dyna Rib F-2M	125
16"	11.00-16SL	Triple Rib HD F-2	124
16"	11.00-16SL	Dyna Rib F-2M	125
16"	11L-16SL	Farm Utility I-1	137
16"	11L-16SL	Laborer F-3	127
16"	11.2-16	Dyna Torque II R-1	53
16"	12.4-16	Sure Grip Lug R-4	155
16.1"	13.6-16.1	All Weather R-3	111
16.1"	14.5/75-16.1SL	Laborer F-3	127
16.1"	14L-16.1SL	Dyna Rib F-2M	126
16.1"	14L-16.1SL	Farm Utility I-1	138
16.1"	14L-16.1FI	Farm Highway Service FI	140
16.1"	16.5L-16.1SL	SofTrac II R-3	115
16.1"	16.5L-16.1SL	Farm Utility I-1	139
16.1"	16.5L-16.1FI	Farm Highway Service FI	141
16.1"	16.5L-16.1SL	Sure Grip Traction I-3	145
16.1"	18.4-16.1	All Weather R-3	112
16.1"	21.5L-16.1SL	SofTrac II R-3	115
16.1"	21.5L-16.1SL	Farm Utility I-1	139
16.1"	21.5L-16.1SL	Sure Grip Traction I-3	145
16.1"	38x20.00-16.1NHS	Super Terra-Grip HF-2	152
16.5"	10-16.5NHS	R14T R-1	24
16.5"	12-16.5NHS	R14T R-1	25
17.5"	14-17.5NHS	R14T R-1	25
18"	4.00-18SL	Rib Implement I-1	132
18"	12.5/80-18NHS	Contractor-T I-3	147
18"	12.5/80-18	Sure Grip Lug I-3	155
19"	4.00-19SL	Triple Rib RS F-2	122
19.5"	15-19.5NHS	R14T R-1	26
19.5"	15-19.5NHS	Sure Grip Loader SS	156
20"	7.50-20SL	Drill Rib I-1	134
20"	38x14.00-20NHS	SofTrac HF-1	149
20"	38x14.00-20NHS	Super Terra-Grip HF-2	152
20"	43x16.00-20NHS	R14T R-1	26
24"	8.3-24	Dura Torque R-1	58
24"	9.5-24	Dura Torque R-1	58
24"	9.5-24	All Weather R-3	111
24"	11.00-24SL	Dyna Rib F-2M	126
24"	11.2-24	Dura Torque R-1	59

BIAS			
Inch	Tire Size	Tread Pattern	Pg.
24"	11.2-24	SFT105 R-3	116
24"	11.25-24SL	Rib Implement I-1	132
24"	12.4-24	Dura Torque R-1	59
24"	13.6-24	Dyna Torque II R-1	54
24"	14.9-24	R14T R-1	25
24"	14.9-24	Dura Torque R-1	60
24"	14.9-24	Special Sure Grip TD8 R-2	108
24"	14.9-24	All Weather R-3	112
24"	16.9-24IND	R14T R-4	26
24"	16.9-24	Dura Torque R-1	60
24"	16.9-24	All Weather R-3	112
24"	16.9-24	IT525 R-4	119
24"	17.5L-24IND	R14T R-4	26
24"	18.4-24	IT525 R-4	119
24"	19.5L-24IND	R14T R-4	27
24"	19.5L-24	SofTrac II R-3	115
24"	19.5L-24	IT515 HS R-4	117
24"	19.5L-24	IT525 R-4	120
24"	21L-24	IT525 R-4	120
25"	66x43.00-25NHS	Super Terra-Grip XT HF-2	154
25"	66x43.00-25NHS	Super Terra-Grip HF-2	153
25"	66x44.00-25NHS	Tundra-Grip HF-1	150
26"	16.9-26	Dyna Torque II R-1	54
26"	18.4-26	Dyna Torque II R-1	54
26"	18.4-26	All Weather R-3	112
26"	23.1-26	Special Sure Grip TD8 R-2	108
26"	23.1-26	All Weather R-3	113
26"	28L-26	Dyna Torque II R-1	56

BIAS			
Inch	Tire Size	Tread Pattern	Pg.
26"	28L-26	Special Sure Grip TD8 R-2	109
26"	28L-26	All Weather R-3	113
26"	54x31.00-26NHS	SFT105 HF-1	150
28"	11.25-28SL	Rib Implement I-1	132
28"	12.4-28	Dura Torque R-1	59
28"	13.6-28	Dura Torque R-1	60
28"	16.9-28	Dyna Torque II R-1	54
28"	16.9-28	Dura Torque R-1	60
28"	16.9-28	IT525 R-4	119
28"	21L-28	IT525 R-4	120
30"	16.9-30	Dura Torque R-1	61
30"	16.9-30	SFT105 R-3	116
30"	16.9-30	Smooth	157
30"	18.4-30	Dura Torque R-1	61
32"	24.5-32	Dyna Torque II R-1	56
32"	30.5L-32	Dyna Torque II R-1	56
32"	30.5L-32	Special Sure Grip TD8 R-2	109
32"	30.5L-32	All Weather R-3	113
32"	VA30.5L-32	All Weather R-3	113
32"	DW500/95D32	Special Sure Grip TD8 R-2	109
34"	18.4-34	Dura Torque R-1	61
34"	20.8-34	Dyna Torque II R-1	55
38"	12.4-38	Dyna Torque II R-1	53
38"	18.4-38	Dyna Torque II R-1	55
38"	18.4-38	Dura Torque R-1	61
38"	18.4-38	Special Sure Grip TD8 R-2	108
38"	20.8-38	Dyna Torque II R-1	55
38"	20.8-38	Special Sure Grip TD8 R-2	108



GOODYEAR FARM TIRES TREAD PATTERNS

BIAS & RADIAL R14T™



R14T CROSSOVER TIRE
P. 22



ULTRATORQUE PLUS R-1
P. 34



ULTRATORQUE RADIAL R-1 P. 35



OPTITORQUE R-1
P. 37



ULTRA SPRAYER R-1
P. 44

BIAS & RADIAL R-1, R-1W



DYNA TORQUE RADIAL R-1 P. 50



DYNA TORQUE II R-1
P. 53



DT730 R-1
P. 57



DURA TORQUE R-1
P. 57



POWER TORQUE R-1
P. 62

BIAS & RADIAL R-2



DT930 R-1W
P. 62




SUPER TRACTION RADIAL R-1W P. 63



OPTITRAC R-1W
P. 65



OPTITERRA R-1W
P. 98



CUSTOM FLO GRIP R-2
P. 99

BIAS & RADIAL R-3



SPECIAL SURE GRIP TD8 RADIAL R-2 P. 103




SPECIAL SURE GRIP TD8 R-2 P. 108



ALL WEATHER RADIAL R-3 P. 110



ALL WEATHER R-3
P. 111



ALL WEATHER RADIAL II R-3 P. 114

BIAS & RADIAL R-4



SOFRAC II R-3
P. 115



SFT105 R-3
P. 116



IT515 HS R-4
P. 117



IT520 R-4
P. 117



IT525 R-4
P. 118

BIAS F-2, F-2M



IT530 R-4
P. 121



TRIPLE RIB RS F-2
P. 122



TRIPLE RIB HD F-2
P. 123



DYNA RIB F-2M
P. 125



LABORER F-3
P. 127

BIAS F-3



MULTI RIB F-3
P. 128

FS24 I-1
P. 129

RIB IMPLEMENT I-1
P. 132

RADIAL IMPLEMENT I-1
P. 133

DRILL RIB I-1
P. 134

FARM UTILITY I-1
P. 135

FARM HIGHWAY SERVICE FI P. 140

FARM HIGHWAY SERVICE II FI P. 142

SUPERFLOT I-3
P. 143

SURE GRIP TRACTION I-3 P. 144

TRACTION IMPLEMENT I-3 P. 146

CONTRACTOR-T I-3
P. 147

SOFRAC HF-1
P. 148

TUNDRA-GRIP HF-1
P. 150

SFT105 HF-1
P. 150

TERRA-RIB HF-1
P. 151

RIB TERRA HF-1
P. 151

SUPER TERRA-GRIP HF-2
P. 152

XTRA-TRAC HF-2
P. 154

SUPER TERRA-GRIP XT HF-2, HF-3 P. 154

SURE GRIP LUG SS, R-4, I-3
P. 155

SURE GRIP LOADER SS
P. 156

SMOOTH
P. 157

SMOOTH IMPLEMENT
P. 157

POWER CUSHION TRAILER SERVICE P. 158

- TRAILER/SPECIALTY
- SKID STEER
- BIAS & RADIAL HF-1, HF-2, HF-3
- BIAS & RADIAL I-3
- BIAS FI
- BIAS & RADIAL I-1
- BIAS F-3



WHAT IS LSW® TECHNOLOGY?



At Titan, we have the ability to design, test and manufacture both wheels and tires for the agriculture market. Our unique position as a complete solutions provider allows us to innovate in ways other companies can't. One of these innovations is Low Sidewall Technology.

Low Sidewall (LSW®) technology features a larger rim diameter and smaller sidewall than a conventional tire, while maintaining the same outside diameter and weight load capacity. The larger rim and smaller sidewall of LSW® provides much greater stability for equipment.



EXPERIENCE THE LOWER PRESSURE, SPEED, SMOOTH RIDE, STABILITY, FUEL ECONOMY, AND SAFETY OF LSW



REDUCED SOIL COMPACTION
up to 40% lower inflation pressures



IMPROVED TRACTION
with stability that provides more power to the ground



STUBBLE-RESISTANT
compounding backed by warranty



FIELD SUPPORT
from nationwide Ag Specialists



REDUCED ROAD LOPE
with faster, smoother transport speeds between fields



REDUCED POWER HOP
with larger wheel diameter that dampens recoil in high draw-bar applications



LSW EQUIPPED MACHINES:



4WD AND MFWD TRACTORS

Whether conducting pre-emergence field work or working in between the rows, tractors experience improved transport speeds and an improved turning radius.



COMBINES

LSW® tires are built to withstand the heavy loads of today's high-horsepower combines while requiring 40% less inflation pressures vs. conventional tires.



SPRAYERS

As sprayer tanks continue to grow to sizes in excess of 1,300 gallons, newer technologies are becoming essential for carrying the load and reducing soil compaction. With LSW®, growers don't have to make sacrifices in ride quality and stability.

RADIAL R14T™

Catalog #	Tire Size	Conventional Size Replaced	Design	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
G4T3RT	LSW320/70R24	320/85R20	R14T	TL	120D	29	3,080	W10	12.1	41.5	19.0	126	34	--	500
G4T314	LSW320/70R28	320/85R24	R14T	TL	122D	29	3,300	W10	12.1	45.1	21.0	138	34	37	550
G4T522	LSW340/70R28	340/85R24	R14T	TL	130D	41	4,180	W12, DD12	13.3	47.2	22.2	145	38	--	575
G4T534	LSW380/70R28	380/85R24	R14T	TL	136D	41	4,940	W12	13.9	49.7	23.1	152	37	--	600
G4T379	LSW420/75R34	420/85R30	R14T	TL	142D	29	5,840	W15L	16.7	57.9	26.7	176	38	42	725
G4T350	LSW460/75R34	460/85R30	R14T	TL	146D	29	6,600	W15L	17.8	60.5	27.6	183	40	--	725
G4T454	LSW460/75R38	460/75R38	R14T	TL	150D	35	7,400	DD16	18.8	64.7	30.1	198	42	44	775
G4T377	LSW460/75R42	460/85R38	R14T	TL	150D	29	7,400	DD16	18.3	69.7	31.6	211	40	45	875

More Sizes Coming Soon. Please contact your local dealer or visit our website.

RADIAL R-1

Catalog #	Tire Size	Conventional Size Replaced	Design	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
GOTT51	LSW480/70R54	480/80R50	Optitorque	TL	181D	64	18,200	W16A	18.9	81.3	37.2	247	50	48	975
GOTFTL	LSW680/55R42	None	Optitorque	TL	171D	29	13,600	DW23B	25.7	72.5	32.5	218	50	46	875
GOTMMK	LSW710/65R46	710/70R42	Optitorque	TL	188D	46	22,000	DW25B, DW28B	28.9	81.0	36.0	243	58	48	975
GOTMM8	LSW800/55R46	800/70R38	Optitorque	TL	190D	46	23,400	DW28B	31.7	81.6	36.2	245	59	48	975

More Sizes Coming Soon. Please contact your local dealer or visit our website.

RADIAL R-1W

Catalog #	Tire Size	Conventional Size Replaced	Design	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
GOP3RT	LSW320/70R24	320/85R20	Optitrac	TL	120D	29	3,080	W10	12.0	41.7	19.1	127	51	--	500
GOP379	LSW420/75R34	420/75R34	Optitrac	TL	142D	29	5,840	W15L	16.9	58.0	26.3	176	62	42	725
GOP248	LSW420/80R30	420/85R28	Optitrac	TL	138D	23	5,200	DW15A	17.4	55.9	25.6	170	60	41	675
GOPF48	LSW420/80R30	420/80R30	Optitrac	TL	153D	29	8,050	DW15A	17.5	55.9	25.1	168	60	41	675
GOPD42	LSW480/70R46	480/80R42	Optitrac	TL	160D	23	9,900	DW16B, DD16	18.8	72.2	32.5	218	62	46	875
GOPP42	LSW480/70R46	480/80R42	Optitrac	TL	174D	52	14,800	DW16B, DD16	18.5	73.5	33.0	221	62	46	875
GOPDKZ	LSW650/60R42	650/60R42	Optitrac	TL	168D	23	12,300	DW20B, MW20B	24.0	71.2	30.6	211	64	--	875
GOPM91	LSW710/60R46	710/70R42	Optitrac	TL	186D	46	20,900	DW25B	28.0	80.9	36.5	244	78	48	975
GOPDSF	LSW750/45R30	None	Optitrac	TL	161D	23	10,200	DW25B	28.5	56.1	30.8	167	57	41	700
GOPKN6	LSW750/60R30	750/65R26	Optitrac	TL	180D	41	17,600	DW25B	28.7	65.1	27.6	192	78	--	775
GOPH96	LSW800/50R42	800/65R32	Optitrac	TL	180D	35	17,600	DW28B	30.4	72.6	32.0	217	68	46	875
GOPDM8	LSW800/55R46	800/70R38	Optitrac	TL	178D	23	16,500	DW28B	31.0	81.2	35.3	242	77	48	975
GOPMM8	LSW800/55R46	800/70R38	Optitrac	TL	190D	46	23,400	DW28B	30.9	81.4	36.9	246	77	48	975
GOPMT3	LSW850/55R30	850/60R26	Optitrac	TL	186D	46	20,900	DW30B	34.0	65.1	29.1	196	69	44	800
GOPDB1	LSW900/50R46	900/70R32	Optitrac	TL	181D	23	18,200	DW30B	32.9	81.4	35.3	242	71	48	975
GOPKB1	LSW900/50R46	900/70R32	Optitrac	TL	191D	41	24,000	DW30B	32.8	81.8	36.8	247	71	48	975
GOPPC4	LSW900/60R42	900/75R32	Optitrac	TL	200D	52	30,900	DW30B	35.5	85.3	38.1	257	71	49	1,025
GOPHFE	LSW1000/45R32	None	Optitrac	TL	184D	35	19,800	DH36HB, 36.00VA	39.0	67.2	27.9	197	66	44	825
GOPD11	LSW1100/35R32	None	Optitrac	TL	175D	23	15,200	DH36HB, DH38HB	40.4	62.9	27.2	187	72	43	750
G8MB16	LSW1100/45R46	None	DT930	TL	181D	17	18,200	DW38HB	39.5	83.7	36.8	250	77	49	1,025
GOPB16	LSW1100/45R46	None	Optitrac	TL	181D	17	18,200	DW38HB	40.3	85.3	37.8	256	73	49	1,025

Continues on Next Page

RADIAL R-1W CONTINUED

Catalog #	Tire Size	Conventional Size Replaced	Design	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
GOPM16	LSW1100/45R46	None	Optitrac	TL	201D	46	32,000	DW38HB	40.7	85.3	37.8	256	73	49	1,025
GOPPR6	LSW1250/35R46	None	Optitrac	TL	202D	52	33,100	DH44HB	46.6	80.7	37.1	246	83	48	1,025
GOPMS6	LSW1400/30R46	None	Optitrac	TL	201D	46	32,000	DH50HB	52.9	83.0	36.9	249	83	48	1,025

More Sizes Coming Soon. Please contact your local dealer or visit our website.

RADIAL R-2

Catalog #	Tire Size	Conventional Size Replaced	Design	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
GFGKN6	LSW750/60R30	750/65R26	Custom Flo Grip	TL	180B	41	17,600	DW25B	28.3	67.0	29.4	200	108	--	800
GFGRT6	LSW850/50R30	850/60R26	Custom Flo Grip	TL	187B	58	21,500	DW30B	33.4	65.4	N/A	N/A	110	44	775
GFGMY1	LSW900/50R42	900/65R32	Custom Flo Grip	TL	192B	46	24,700	DW30B	34.3	80.4	36.2	243	111	47	975
GFGHR6	LSW1250/35R46	None	Custom Flo Grip	TL	195B	35	26,800	DH44HB	47.3	84.5	37.5	254	116	48	1,025

More Sizes Coming Soon. Please contact your local dealer or visit our website.



WHAT IS ULTIMATE FLEX TECHNOLOGY™ ?



At Titan, we have the ability to design, test and manufacture both wheels and tires for the agriculture market. Our unique position as a complete solutions provider allows us to innovate in ways other companies can't. One of these innovations is Ultimate Flex Technology.

The latest innovation from Titan, Ultimate Flex Technology™ (UFT™), is the tire you didn't know you were waiting for. It combines the elements of conventional, Increased Flexion (IF) and Very High Flexion (VF) tires to create a universal solution for tire replacements, initially available for sprayers.

SIMPLIFY THE WORLD OF TIRE TECHNOLOGY WITH A SMART DESIGN THAT CAN MATCH THEM ALL



UFT can replace existing tire technologies without sacrificing performance, including:

- Conventional
- Increased Flexion (IF)
- Very High Flexion (VF)



UFT is currently available in Titan's flagship R-1 sprayer line: the Goodyear Ultra Sprayer. Initial sizes include the most common sprayers: 380/90R46 and 380/105R50



Reduces soil compaction with the ability to run up to 40% lower inflation pressures than a standard tire



Finding a single replacement tire has never been easier than with UFT, a tire design to fit nearly every sprayer set up.

RADIAL R-1

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
*UFT380/90R46	UUS432	TL	176D	70	15,700	W12A, W12B, W13A, W13B, DW13A, DW13B	15.1	73.6	33.7	223	49	46	925
			171D	70	13,600		15.1	73.6	34.0	224			
			168D	78	12,300		15.0	73.6	34.3	225			
			179D	64	17,100		N/A	N/A	N/A	N/A			
*UFT380/105R50	UUS2DT	TL	177D	70	16,100	W12A, W12B, DW12A, W13A, W13B, DW13B	N/A	N/A	N/A	N/A	49	48	1,025
			170D	70	13,200		N/A	N/A	N/A	N/A			
							N/A	N/A	N/A	N/A			

* Coming Soon





LSW OPTIONS



CROSSOVER



ROADABILITY



IMPROVED TREAD WEAR



TIME SAVING



MINIMAL SOIL DISTURBANCE

GOODYEAR R14T™ CROSSOVER TIRE

Key Benefits

- Continuous arc bar angle and shape inspired by the premium Goodyear Optitrac R-1W line, provides unparalleled traction and cleaning
- Titan's MXL L-3 element down the center of the tire provides superior wear and outstanding performance
- High lug-to-void ratio perfect for hard surface applications with a lug designed for cleaning and traction in softer soils
- The perfect hybrid between a R-1 and a R-4
- Conventional as well as LSW offerings bring the benefits of Low Side Wall Technology (LSW) to compact tractors for the first time



Application(s)





Tire Size	Catalog #	Tread Design	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
18x8.50-10NHS	R4T3R0	B	TL	6	76A8	32	880	6.00-I-55, I-70, I-90, 6JA, 7.00-I-55, I-70, I-90, 7JA	7.3	18.2	8.3	54	12	--	--
Inflation Pressure (psi)	30 mph (lbs)		25 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)				
18	575		640		715		760		850		1,000				
20	595		660		740		785		880		1,035				
22	625		695		780		825		925		1,090				
24	665		740		830		880		985		1,160				
26	705		785		880		935		1,045		1,230				
28	745		825		925		980		1,095		1,295				
30	770		855		960		1,015		1,135		1,345				
32	790		880		985		1,045		1,170		1,380				

Tire Size	Catalog #	Tread Design	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
23x8.50-12NHS	R4T3G8	B	TL	6	88A8	34	1,230	6.0AT, 6.5AT, 7.00-I-55, I-70, I-90, 7JA, 7.0AT	8.2	22.9	10.5	68	13	--	--
Inflation Pressure (psi)	30 mph (lbs)		25 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)				
18	770		855		960		1,015		1,135		1,345				
20	790		880		985		1,045		1,170		1,380				
22	840		935		1,045		1,115		1,245		1,465				
24	890		990		1,110		1,180		1,315		1,555				
26	945		1,050		1,175		1,250		1,395		1,645				
28	990		1,100		1,230		1,310		1,465		1,720				
32	1,055		1,170		1,310		1,390		1,555		1,835				
34	1,105		1,230		1,380		1,465		1,635		1,930				

Tire Size	Catalog #	Tread Design	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
25x8.50-14NHS	R4T3B9	B	TL	6	92A8	32	1,390	6.0AT, 6.5AT, 7.00-I-55, I-70, I-90, 7KB, 7.0AT	7.7	25.2	11.4	75	13	--	--
Inflation Pressure (psi)	30 mph (lbs)		25 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)				
18	890		990		1,110		1,180		1,315		1,555				
20	945		1,050		1,175		1,250		1,395		1,645				
22	1,025		1,140		1,275		1,355		1,515		1,785				
24	1,055		1,170		1,310		1,390		1,555		1,835				
26	1,105		1,230		1,380		1,465		1,635		1,930				
28	1,150		1,280		1,435		1,525		1,700		2,010				
30	1,190		1,320		1,480		1,570		1,755		2,070				
32	1,250		1,390		1,555		1,655		1,850		2,175				

Tire Size	Catalog #	Tread Design	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
26x12.00-12NHS	R4T37G	B	TL	6	107A8	30	2,150	8.0AT, 8.50-I-55, I-70, I-90, 8 1/2JA, 8.5AT, 9 1/2JA, 9.5AT, 10 1/2JA, 10.5AT, 10.50-I-55, I-70, I-90	11.7	25.7	11.4	75	16	--	--

See Next Page for the Load & Inflation Table



LSW OPTIONS



CROSSOVER



ROADABILITY



IMPROVED TREAD WEAR



TIME SAVING



MINIMAL SOIL DISTURBANCE



R14T



LSW OPTIONS



CROSSOVER



ROADABILITY



IMPROVED TREAD WEAR



TIME SAVING



MINIMAL SOIL DISTURBANCE

R4T37G LOAD & INFLATION TABLE

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
18	1,415	1,570	1,760	1,870	2,090	2,465
20	1,540	1,710	1,915	2,035	2,275	2,680
22	1,640	1,820	2,040	2,165	2,420	2,855
24	1,685	1,870	2,095	2,225	2,485	2,935
26	1,780	1,980	2,220	2,355	2,635	3,110
28	1,880	2,090	2,340	2,485	2,780	3,275
30	1,935	2,150	2,410	2,560	2,860	3,375

Tire Size	Catalog #	Tread Design	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
27x8.50-15NHS	R4T3Y7	B	TL	8	102A8	44	1,870	7JA	8.9	27.3	12.5	81	14	--	--

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
16	945	1,050	1,175	1,250	1,395	1,645
20	1,055	1,170	1,310	1,390	1,555	1,835
24	1,190	1,320	1,480	1,570	1,755	2,070
28	1,285	1,430	1,600	1,700	1,900	2,240
32	1,415	1,570	1,760	1,870	2,090	2,465
36	1,540	1,710	1,915	2,035	2,275	2,680
40	1,585	1,760	1,970	2,095	2,340	2,760
44	1,685	1,870	2,095	2,225	2,485	2,935

Tire Size	Catalog #	Tread Design	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
29x9.50-15NHS	R4T3XC	B	TL	6	103A8	30	1,930	7JA, 8LB	9.3	29.0	13.2	86	15	--	--

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
16	1,190	1,320	1,480	1,570	1,755	2,070
18	1,250	1,390	1,555	1,655	1,850	2,175
20	1,330	1,480	1,660	1,760	1,970	2,325
22	1,415	1,570	1,760	1,870	2,090	2,465
24	1,540	1,710	1,915	2,035	2,275	2,680
26	1,540	1,710	1,915	2,035	2,275	2,680
28	1,640	1,820	2,040	2,165	2,420	2,855
30	1,735	1,930	2,160	2,295	2,565	3,025

Tire Size	Catalog #	Tread Design	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
10-16.5NHS	R4T3C8	B	TL	6	110A8	45	2,340	8.25	9.9	30.5	14.0	91	17	--	--

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
						10 mph (lbs)	5 mph (lbs)	3 mph (lbs)
20	1,300	1,430	1,485	1,615	1,790	1,915	2,145	2,390
25	1,500	1,650	1,715	1,865	2,065	2,210	2,475	2,755
30	1,655	1,820	1,895	2,055	2,275	2,440	2,730	3,040
35	1,800	1,980	2,060	2,235	2,475	2,655	2,970	3,305
40	1,955	2,150	2,235	2,430	2,690	2,880	3,225	3,590
45	2,130	2,340	2,435	2,645	2,925	3,135	3,510	3,910



Tire Size	Catalog #	Tread Design	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
260/70R16.5	R4T6BL	A	TL	116A8	46	2,760	8.25	10.2	31.4	14.2	95	24	--	--
Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)								
23	1,465	1,610	1,675	1,705	1,820	2,015								
29	1,700	1,870	1,945	1,980	2,115	2,340								
32	1,855	2,040	2,120	2,160	2,305	2,550								
35	2,000	2,200	2,290	2,330	2,485	2,750								
38	2,130	2,340	2,435	2,480	2,645	2,925								
41	2,250	2,470	2,570	2,620	2,790	3,090								
46	2,510	2,760	2,870	2,925	3,120	3,450								

Tire Size	Catalog #	Tread Design	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
12-16.5NHS	R4T3C9	B	TL	6	116A8	40	2,760	9.75	12.1	33.5	15.4	100	18	--	--
Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service									
						10 mph (lbs)	5 mph (lbs)	3 mph (lbs)							
20	1,700	1,870	1,945	2,115	2,340	2,505	2,805	3,125							
25	1,900	2,090	2,175	2,360	2,615	2,800	3,135	3,490							
30	2,130	2,340	2,435	2,645	2,925	3,135	3,510	3,910							
35	2,365	2,600	2,705	2,940	3,250	3,485	3,900	4,340							
40	2,510	2,760	2,870	3,120	3,450	3,700	4,140	4,610							

Tire Size	Catalog #	Tread Design	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
14-17.5NHS	R4T33L	B	TL	6	121A8	30	3,200	10.50	13.1	36.4	16.5	108	21	--	--
Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service									
						10 mph (lbs)	5 mph (lbs)	3 mph (lbs)							
20	2,250	2,470	2,570	2,790	3,090	3,310	3,705	4,125							
25	2,575	2,830	2,945	3,200	3,540	3,790	4,245	4,725							
30	2,910	3,200	3,330	3,615	4,000	4,290	4,800	5,345							

Tire Size	Catalog #	Tread Design	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
14.9-24	R4T83D	B	TL	8	124A8	26	3,520	W11, DW11, W12, DW12, W13, DW13, DW13L	15.6	49.3	22.6	147	29	39	600
Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service								
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)						
12	2,000	2,200	2,355	2,440	2,950	3,300	16	3,740	4,115						
14	2,185	2,400	2,570	2,665	3,215	3,600	18	4,080	4,490						
16	2,365	2,600	2,780	2,885	3,485	3,900	20	4,420	4,860						
18	2,575	2,830	3,030	3,140	3,790	4,245	24	4,810	5,290						
20	2,730	3,000	3,210	3,330	4,020	4,500	26	5,100	5,610						
22	2,910	3,200	3,425	3,550	4,290	4,800	28	5,440	5,985						
24	3,005	3,300	3,530	3,665	4,420	4,950	32	5,610	6,170						
26	3,205	3,520	3,765	3,905	4,715	5,280	34	5,985	6,580						



LSW OPTIONS



CROSSOVER



ROADABILITY



IMPROVED TREAD WEAR



TIME SAVING



MINIMAL SOIL DISTURBANCE





R14T



LSW OPTIONS



CROSSOVER



ROADABILITY



IMPROVED TREAD WEAR



TIME SAVING



MINIMAL SOIL DISTURBANCE

Tire Size	Catalog #	Tread Design	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI	
15-19.5NHS	R4T373	B	TL	6	129A8	30	4,080	11.75, 12.25	15.2	40.5	18.2	119	23	--	--	
Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)		20 mph (lbs)		10 mph (lbs)		5 mph (lbs)		Cyclic Service						
										10 mph (lbs)	5 mph (lbs)	3 mph (lbs)				
	20	2,910	3,200		3,330		3,615		4,000		4,290	4,800	5,345			
	25	3,310	3,640		3,785		4,115		4,550		4,880	5,460	6,080			
30	3,715	4,080		4,245		4,610		5,100		5,465	6,120	6,815				

Tire Size	Catalog #	Tread Design	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
43x16.00-20NHS	R4T6A5	B	TL	6	129B	30	4,080	W14L, W14LH	15.9	44.2	20.0	131	27	--	--
Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)		Cyclic Service					
										Inflation Pressure (psi)	20 mph (lbs)	10 mph (lbs)	6 mph (lbs)		
16	2,830	3,170		3,370		3,735		5,010		21	4,245	5,235	5,660		
18	3,000	3,360		3,570		3,960		5,310		23	4,500	5,550	6,000		
20	3,200	3,585		3,810		4,225		5,665		25	4,800	5,920	6,400		
22	3,420	3,830		4,070		4,515		6,050		27	5,130	6,325	6,840		
24	3,640	4,075		4,330		4,805		6,440		29	5,460	6,735	7,280		
26	3,740	4,190		4,450		4,935		6,620		31	5,610	6,920	7,480		
28	3,960	4,435		4,710		5,225		7,005		33	5,940	7,325	7,920		
30	4,080	4,570		4,855		5,385		7,220		35	6,120	7,550	8,160		

Tire Size	Catalog #	Tread Design	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
16.9-24IND	R4T645	B	TL	6	136A8	22	4,940	DW14L, W15L, DW15L	17.2	51.0	22.3	147	33	--	--
Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)		Cyclic Service			
												10 mph (lbs)	5 mph (lbs)	3 mph (lbs)	
12	2,805	3,080		3,205		3,265		3,480		3,850		4,125	4,620	5,145	
14	3,205	3,520		3,660		3,730		3,980		4,400		4,715	5,280	5,880	
16	3,515	3,860		4,015		4,090		4,360		4,825		5,170	5,790	6,445	
18	3,915	4,300		4,470		4,560		4,860		5,375		5,760	6,450	7,180	
20	4,260	4,680		4,865		4,960		5,290		5,850		6,270	7,020	7,815	
22	4,495	4,940		5,140		5,235		5,580		6,175		6,620	7,410	8,250	

Tire Size	Catalog #	Tread Design	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
17.5L-24IND	R4T603	B	TL	6	132A8	20	4,400	DW14L, W15L, DW15L	17.0	48.8	21.6	142	31	--	--
Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)		Cyclic Service			
												10 mph (lbs)	5 mph (lbs)	3 mph (lbs)	
12	2,650	2,910		3,025		3,085		3,290		3,640		3,900	4,365	4,860	
14	3,005	3,300		3,430		3,500		3,730		4,125		4,420	4,950	5,510	
16	3,405	3,740		3,890		3,965		4,225		4,675		5,010	5,610	6,245	
18	3,715	4,080		4,245		4,325		4,610		5,100		5,465	6,120	6,815	
20	4,005	4,400		4,575		4,665		4,970		5,500		5,895	6,600	7,350	



Tire Size	Catalog #	Tread Design	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
19.5L-24IND	R4T1BF	B	TL	12	151A8	34	7,600	DW16A, DW16L	18.8	51.1	22.7	149	33	--	625
Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service								
							10 mph (lbs)	5 mph (lbs)	3 mph (lbs)						
12	3,205	3,520	3,660	3,730	3,980	4,400	4,715	5,280	5,880						
16	4,005	4,400	4,575	4,665	4,970	5,500	5,895	6,600	7,350						
18	4,495	4,940	5,140	5,235	5,580	6,175	6,620	7,410	8,250						
22	5,170	5,680	5,905	6,020	6,420	7,100	7,610	8,520	9,485						
26	5,825	6,400	6,655	6,785	7,230	8,000	8,575	9,600	10,690						
30	6,325	6,950	7,230	7,365	7,855	8,690	9,315	10,425	11,605						
32	6,735	7,400	7,695	7,845	8,360	9,250	9,915	11,100	12,360						
34	6,915	7,600	7,905	8,055	8,590	9,500	10,185	11,400	12,690						

Tire Size	Catalog #	Tread Design	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
300/70R16.5	R4T4GR	A	TL	116A8	35	2,760	9.75	11.5	33.1	15.1	100	25	--	--
Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service							
							10 mph (lbs)	5 mph (lbs)	3 mph (lbs)					
23	1,800	1,980	2,060	2,100	2,235	2,475	2,655	2,970	3,305					
29	2,130	2,340	2,435	2,480	2,645	2,925	3,135	3,510	3,910					
32	2,310	2,540	2,640	2,690	2,870	3,175	3,405	3,810	4,240					
35	2,510	2,760	2,870	2,925	3,120	3,450	3,700	4,140	4,610					

Tire Size	Catalog #	Tread Design	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
320/85R20	R4T2RT	A	TL	119D	23	3,000	W9, W10, W10H, W11	12.6	41.4	18.7	125	34	--	500
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service					
									Inflation Pressure (psi)	6 mph (lbs)				
6 (Duals)	1,115	1,225	1,285	1,340	1,410	1,450	1,640	1,840	12	2,085				
9	1,500	1,650	1,735	1,805	1,895	1,955	2,210	2,475	15	2,805				
12	1,755	1,930	2,025	2,115	2,220	2,285	2,585	2,895	17	3,280				
15	2,000	2,200	2,310	2,410	2,530	2,605	2,950	3,300	20	3,740				
17	2,250	2,470	2,595	2,705	2,840	2,925	3,310	3,705	23	4,200				
20	2,510	2,760	2,900	3,020	3,175	3,270	3,700	4,140	26	4,690				
23	2,730	3,000	3,150	3,285	3,450	3,555	4,020	4,500	29	5,100				



LSW OPTIONS



CROSSOVER



ROADABILITY



IMPROVED TREAD WEAR



TIME SAVING



MINIMAL SOIL DISTURBANCE



R14T



LSW OPTIONS



CROSSOVER



ROADABILITY



IMPROVED TREAD WEAR



TIME SAVING



MINIMAL SOIL DISTURBANCE

Tire Size	Catalog #	Tread Design	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
LSW320/70R24	G4T3RT	A	TL	120D	29	3,080	W10	12.1	41.5	19.0	126	34	--	500
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service					
									Inflation Pressure (psi)	6 mph (lbs)				
6 (Duals)	1,025	1,125	1,180	1,230	1,295	1,335	1,510	1,690	12	1,915				
9	1,385	1,520	1,595	1,665	1,750	1,800	2,035	2,280	15	2,585				
12	1,600	1,760	1,850	1,925	2,025	2,085	2,360	2,640	17	2,990				
15	1,855	2,040	2,140	2,235	2,345	2,415	2,735	3,060	20	3,470				
17	2,065	2,270	2,385	2,485	2,610	2,690	3,040	3,405	23	3,860				
20	2,310	2,540	2,665	2,780	2,920	3,010	3,405	3,810	26	4,320				
23	2,510	2,760	2,900	3,020	3,175	3,270	3,700	4,140	29	4,690				
29	2,805	3,080	3,235	3,375	3,540	3,650	4,125	4,620	36	5,235				

Tire Size	Catalog #	Tread Design	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
320/85R24	R4T214	A	TL	122D	23	3,300	W9, W10, W10H, DW10, W11, DW11	12.9	45.2	20.5	137	34	37	550
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service					
									Inflation Pressure (psi)	6 mph (lbs)				
6 (Duals)	1,185	1,300	1,365	1,425	1,495	1,540	1,740	1,950	12	2,210				
9	1,655	1,820	1,910	1,995	2,095	2,155	2,440	2,730	15	3,095				
12	1,900	2,090	2,195	2,290	2,405	2,475	2,800	3,135	17	3,555				
15	2,185	2,400	2,520	2,630	2,760	2,845	3,215	3,600	20	4,080				
17	2,440	2,680	2,815	2,935	3,080	3,175	3,590	4,020	23	4,555				
20	2,730	3,000	3,150	3,285	3,450	3,555	4,020	4,500	26	5,100				
23	3,005	3,300	3,465	3,615	3,795	3,910	4,420	4,950	29	5,610				

Tire Size	Catalog #	Tread Design	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
LSW320/70R28	G4T314	A	TL	122D	29	3,300	W10	12.1	45.1	21.0	138	34	37	550
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service					
									Inflation Pressure (psi)	6 mph (lbs)				
6 (Duals)	1,085	1,195	1,255	1,310	1,375	1,415	1,600	1,795	12	2,030				
9	1,500	1,650	1,735	1,805	1,895	1,955	2,210	2,475	15	2,805				
12	1,755	1,930	2,025	2,115	2,220	2,285	2,585	2,895	17	3,280				
15	2,000	2,200	2,310	2,410	2,530	2,605	2,950	3,300	20	3,740				
17	2,250	2,470	2,595	2,705	2,840	2,925	3,310	3,705	23	4,200				
20	2,510	2,760	2,900	3,020	3,175	3,270	3,700	4,140	26	4,690				
23	2,730	3,000	3,150	3,285	3,450	3,555	4,020	4,500	29	5,100				
29	3,005	3,300	3,465	3,615	3,795	3,910	4,420	4,950	36	5,610				

Tire Size	Catalog #	Tread Design	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
340/85R24	R4T422	A	TL	130D	35	4,180	W11, W12	14.2	46.8	21.8	143	38	--	575

See Next Page for the Load & Inflation Table



LSW OPTIONS



CROSSOVER



ROADABILITY



IMPROVED TREAD WEAR



TIME SAVING



MINIMAL SOIL DISTURBANCE



R4T422 LOAD & INFLATION TABLE

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	1,320	1,450	1,525	1,590	1,665	1,720	1,945	2,175	12	2,465
9	1,800	1,980	2,080	2,170	2,275	2,345	2,655	2,970	15	3,365
12	2,065	2,270	2,385	2,485	2,610	2,690	3,040	3,405	17	3,860
17	2,730	3,000	3,150	3,285	3,450	3,555	4,020	4,500	23	5,100
23	3,310	3,640	3,820	3,985	4,185	4,315	4,880	5,460	29	6,190
29	3,605	3,960	4,160	4,335	4,555	4,695	5,305	5,940	36	6,730
32	3,715	4,080	4,285	4,470	4,690	4,835	5,465	6,120	41	6,935
35	3,805	4,180	4,390	4,575	4,805	4,955	5,600	6,270	44	7,105

Tire Size	Catalog #	Tread Design	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
LSW340/70R28	G4T522	A	TL	130D	41	4,180	W12, DD12	13.3	47.2	22.2	145	38	--	575

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	1,185	1,300	1,365	1,425	1,495	1,540	1,740	1,950	12	2,210
12	1,900	2,090	2,195	2,290	2,405	2,475	2,800	3,135	17	3,555
17	2,440	2,680	2,815	2,935	3,080	3,175	3,590	4,020	23	4,555
23	3,005	3,300	3,465	3,615	3,795	3,910	4,420	4,950	29	5,610
29	3,310	3,640	3,820	3,985	4,185	4,315	4,880	5,460	36	6,190
35	3,515	3,860	4,055	4,225	4,440	4,575	5,170	5,790	44	6,560
38	3,715	4,080	4,285	4,470	4,690	4,835	5,465	6,120	48	6,935
41	3,805	4,180	4,390	4,575	4,805	4,955	5,600	6,270	51	7,105

Tire Size	Catalog #	Tread Design	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
380/85R24	R4T234	A	TL	131D	23	4,300	W11, W12, W13	15.0	49.0	22.0	148	37	--	600

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	1,545	1,700	1,785	1,860	1,955	2,015	2,280	2,550	12	2,890
9	2,130	2,340	2,455	2,560	2,690	2,775	3,135	3,510	15	3,980
12	2,510	2,760	2,900	3,020	3,175	3,270	3,700	4,140	17	4,690
15	2,805	3,080	3,235	3,375	3,540	3,650	4,125	4,620	20	5,235
17	3,205	3,520	3,695	3,855	4,050	4,170	4,715	5,280	23	5,985
20	3,515	3,860	4,055	4,225	4,440	4,575	5,170	5,790	26	6,560
23	3,915	4,300	4,515	4,710	4,945	5,095	5,760	6,450	29	7,310

Tire Size	Catalog #	Tread Design	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
LSW380/70R28	G4T534	A	TL	136D	41	4,940	W12	13.9	49.7	23.1	152	37	--	600

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	1,410	1,550	1,630	1,695	1,780	1,835	2,075	2,325	12	2,635
9	1,900	2,090	2,195	2,290	2,405	2,475	2,800	3,135	15	3,555
15	2,575	2,830	2,970	3,100	3,255	3,355	3,790	4,245	20	4,810
17	2,910	3,200	3,360	3,505	3,680	3,790	4,290	4,800	23	5,440
23	3,515	3,860	4,055	4,225	4,440	4,575	5,170	5,790	29	6,560
29	3,915	4,300	4,515	4,710	4,945	5,095	5,760	6,450	36	7,310
35	4,130	4,540	4,765	4,970	5,220	5,380	6,085	6,810	44	7,720
41	4,495	4,940	5,185	5,410	5,680	5,855	6,620	7,410	51	8,400



R14T



LSW OPTIONS



CROSSOVER



ROADABILITY



IMPROVED TREAD WEAR



TIME SAVING



MINIMAL SOIL DISTURBANCE

Tire Size	Catalog #	Tread Design	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim			Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
420/85R30	R4T479	A	TL	145D	35	6,400	W12, W13, DW13, DW13A, W14L, DW14A, W15L, DW15A			17.9	57.2	26.2	174	38	42	725
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service			Inflation Pressure (psi)	6 mph (lbs)			
6 (Duals)	2,035	2,235	2,345	2,445	2,570	2,650	2,995	3,355				12	3,800			
9	2,730	3,000	3,150	3,285	3,450	3,555	4,020	4,500				15	5,100			
12	3,205	3,520	3,695	3,855	4,050	4,170	4,715	5,280				17	5,985			
17	4,130	4,540	4,765	4,970	5,220	5,380	6,085	6,810				23	7,720			
23	5,025	5,520	5,795	6,045	6,350	6,540	7,395	8,280				29	9,385			
29	5,460	6,000	6,300	6,570	6,900	7,110	8,040	9,000				36	10,200			
35	5,825	6,400	6,720	7,010	7,360	7,585	8,575	9,600				44	10,880			

Tire Size	Catalog #	Tread Design	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim			Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
LSW420/75R34	G4T379	A	TL	142D	29	5,840	W15L			16.7	57.9	26.7	176	38	42	725
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service			Inflation Pressure (psi)	6 mph (lbs)			
6 (Duals)	1,920	2,110	2,215	2,310	2,425	2,500	2,825	3,165				12	3,585			
9	2,650	2,910	3,055	3,185	3,345	3,450	3,900	4,365				15	4,945			
12	3,005	3,300	3,465	3,615	3,795	3,910	4,420	4,950				17	5,610			
15	3,515	3,860	4,055	4,225	4,440	4,575	5,170	5,790				20	6,560			
17	3,915	4,300	4,515	4,710	4,945	5,095	5,760	6,450				23	7,310			
20	4,370	4,800	5,040	5,255	5,520	5,690	6,430	7,200				26	8,160			
23	4,730	5,200	5,460	5,695	5,980	6,160	6,970	7,800				29	8,840			
29	5,315	5,840	6,130	6,395	6,715	6,920	7,825	8,760				36	9,930			

Tire Size	Catalog #	Tread Design	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim			Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
440/80R24	R4T20C	A	TL	130D 135A8	23	4,180 4,800	W14L, DW14L, W15L, DW15L			17.6	50.9	23.2	154	38	--	--
Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service			10 mph (lbs)	5 mph (lbs)	3 mph (lbs)				
12	2,805	3,080	3,205	3,265	3,480	3,850				4,125	4,620	5,145				
17	3,605	3,960	4,120	4,200	4,475	4,950				5,305	5,940	6,615				
20	4,005	4,400	4,575	4,665	4,970	5,500				5,895	6,600	7,350				
23	4,370	4,800	4,990	5,090	5,425	6,000				6,430	7,200	8,015				

Tire Size	Catalog #	Tread Design	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim			Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
460/85R30	R4T250	A	TL	145D	23	6,400	W14L, DW14A, W15L, DW15A, W16A, W16L, DW16A			19.1	60.5	27.7	184	40	--	725
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service			Inflation Pressure (psi)	6 mph (lbs)			
6 (Duals)	2,330	2,560	2,690	2,805	2,945	3,035	3,430	3,840				12	4,350			
9	3,205	3,520	3,695	3,855	4,050	4,170	4,715	5,280				15	5,985			
12	3,715	4,080	4,285	4,470	4,690	4,835	5,465	6,120				17	6,935			
15	4,260	4,680	4,915	5,125	5,380	5,545	6,270	7,020				20	7,955			
17	4,730	5,200	5,460	5,695	5,980	6,160	6,970	7,800				23	8,840			
20	5,315	5,840	6,130	6,395	6,715	6,920	7,825	8,760				26	9,930			
23	5,825	6,400	6,720	7,010	7,360	7,585	8,575	9,600				29	10,880			



Tire Size	Catalog #	Tread Design	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
LSW460/75R34	G4T350	A	TL	146D	29	6,600	W15L	17.8	60.5	27.6	183	40	--	725
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service					
									Inflation Pressure (psi)	6 mph (lbs)				
6 (Duals)	2,210	2,430	2,550	2,660	2,795	2,880	3,255	3,645	12	4,130				
9	3,005	3,300	3,465	3,615	3,795	3,910	4,420	4,950	15	5,610				
12	3,515	3,860	4,055	4,225	4,440	4,575	5,170	5,790	17	6,560				
15	4,005	4,400	4,620	4,820	5,060	5,215	5,895	6,600	20	7,480				
17	4,495	4,940	5,185	5,410	5,680	5,855	6,620	7,410	23	8,400				
20	5,025	5,520	5,795	6,045	6,350	6,540	7,395	8,280	26	9,385				
23	5,460	6,000	6,300	6,570	6,900	7,110	8,040	9,000	29	10,200				
29	6,005	6,600	6,930	7,225	7,590	7,820	8,845	9,900	36	11,220				

Tire Size	Catalog #	Tread Design	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
460/85R34	R4T154	A	TL	140D	17	5,520	DW14A, W15A, W15L, DW15A, W16A, W16L, DW16A	19.2	64.2	28.9	194	42	44	775
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service					
									Inflation Pressure (psi)	6 mph (lbs)				
6 (Duals)	2,465	2,710	2,845	2,965	3,115	3,210	3,630	4,065	12	4,605				
9	3,310	3,640	3,820	3,985	4,185	4,315	4,880	5,460	15	6,190				
12	3,915	4,300	4,515	4,710	4,945	5,095	5,760	6,450	17	7,310				
15	4,495	4,940	5,185	5,410	5,680	5,855	6,620	7,410	20	8,400				
17	5,025	5,520	5,795	6,045	6,350	6,540	7,395	8,280	23	9,385				

Tire Size	Catalog #	Tread Design	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
LSW460/75R38	G4T454	A	TL	150D	35	7,400	DD16	18.8	64.7	30.1	198	42	44	775
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service					
									Inflation Pressure (psi)	6 mph (lbs)				
6 (Duals)	2,330	2,560	2,690	2,805	2,945	3,035	3,430	3,840	12	4,350				
9	3,205	3,520	3,695	3,855	4,050	4,170	4,715	5,280	15	5,985				
12	3,715	4,080	4,285	4,470	4,690	4,835	5,465	6,120	17	6,935				
17	4,730	5,200	5,460	5,695	5,980	6,160	6,970	7,800	23	8,840				
20	5,315	5,840	6,130	6,395	6,715	6,920	7,825	8,760	26	9,930				
23	5,825	6,400	6,720	7,010	7,360	7,585	8,575	9,600	29	10,880				
29	6,325	6,950	7,300	7,610	7,990	8,235	9,315	10,425	36	11,815				
35	6,735	7,400	7,770	8,105	8,510	8,770	9,915	11,100	44	12,580				

Tire Size	Catalog #	Tread Design	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
460/85R38	R4T277	A	TL	149D	23	7,150	W14L, DW14A, W15A, W15L, DW15A, W16A, W16L, DW16A, DD16	19.2	69.0	30.5	207	40	45	825

See Next Page for the Load & Inflation Table

LSW OPTIONS

CROSSOVER

ROADABILITY

IMPROVED TREAD WEAR

TIME SAVING

MINIMAL SOIL DISTURBANCE





R14T



LSW OPTIONS



CROSSOVER



ROADABILITY



IMPROVED TREAD WEAR



TIME SAVING



MINIMAL SOIL DISTURBANCE

R4T277 LOAD & INFLATION TABLE

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	2,560	2,815	2,955	3,080	3,235	3,335	3,770	4,225	12	4,785
9	3,515	3,860	4,055	4,225	4,440	4,575	5,170	5,790	15	6,560
12	4,130	4,540	4,765	4,970	5,220	5,380	6,085	6,810	17	7,720
15	4,730	5,200	5,460	5,695	5,980	6,160	6,970	7,800	20	8,840
17	5,315	5,840	6,130	6,395	6,715	6,920	7,825	8,760	23	9,930
20	5,825	6,400	6,720	7,010	7,360	7,585	8,575	9,600	26	10,880
23	6,505	7,150	7,510	7,830	8,225	8,475	9,580	10,725	29	12,155

Tire Size	Catalog #	Tread Design	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
LSW460/75R42	G4T377	A	TL	150D	29	7,400	DD16	18.3	69.7	31.6	211	40	45	875

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	2,465	2,710	2,845	2,965	3,115	3,210	3,630	4,065	12	4,605
9	3,310	3,640	3,820	3,985	4,185	4,315	4,880	5,460	15	6,190
12	3,915	4,300	4,515	4,710	4,945	5,095	5,760	6,450	17	7,310
15	4,495	4,940	5,185	5,410	5,680	5,855	6,620	7,410	20	8,400
17	5,025	5,520	5,795	6,045	6,350	6,540	7,395	8,280	23	9,385
20	5,595	6,150	6,460	6,735	7,070	7,290	8,240	9,225	26	10,455
23	6,190	6,800	7,140	7,445	7,820	8,060	9,110	10,200	29	11,560
29	6,735	7,400	7,770	8,105	8,510	8,770	9,915	11,100	36	12,580





R14T™ CROSSOVER TIRE DEVELOPMENT


THE INNOVATIVE R14T TREAD DESIGN IS A NEW HYBRID OF AG, TURF AND INDUSTRIAL TREAD DESIGNS, READY FOR ANY APPLICATION



AGRICULTURE

GRIPPING INNOVATION
FRESH FROM THE FIELD


Inspired by years of R-1 agricultural tread design expertise, the R14T utilizes our Optitrac R-1W continuous arc bar angle and shape to provide top-notch traction and exceptional clean out. The R14T is ready for all weather conditions on the farm.



TURF

DEPENDABLE TRACTION
WITH MINIMAL PRESSURE

Borrowing from our R-3 tread designs, the R14T hybrid tire features a high lug-to-void ratio perfect for turf and hard surface applications. The lug design is ideal for cleaning and traction in softer soils.



INDUSTRIAL

THE NEXT GENERATION OF
VERSATILITY

Evolving from our R-4 all-purpose industrial tire designs along with the MXL L-3 center tread element, the R14T crossover tire takes versatility to the next level. It is ready to tackle any job on or off the road with better durability, wear and hard surface performance.




GOODYEAR R14T

PERFECTION MIGHT JUST
BE POSSIBLE

The R14T combines the traction and cleaning features of an R-1 agricultural tire with the wear and ride features of an R-4 industrial tire, giving the new tire its name. From hard concrete surfaces to softer soils, the R14T is designed to perform in a variety of conditions.

TREAD FOOTPRINT AND TRACTION COMPARISON

The R14T provides excellent traction with minimal ground disturbance



Inflation Pressure: 14 psi
Tested Load: 723lbs
Contact Area: 10.53 in²
Footprint Area: 38.59 in²
Ave Contact Pressure: 67.53 PSI
Contact to Void Ratio: 27%





Inflation Pressure: 10 psi
Tested Load: 723lbs
Contact Area: 22.67 in²
Footprint Area: 46.92 in²
Ave Contact Pressure: 31.38 PSI
Contact to Void Ratio: 48%



Inflation Pressure: 10 psi
Tested Load: 723lbs
Contact Area: 16.08 in²
Footprint Area: 47.82 in²
Ave Contact Pressure: 44.2 PSI
Contact to Void Ratio: 34%



Inflation Pressure: 10 psi
Tested Load: 723lbs
Contact Area: 18.54 in²
Footprint Area: 59.62 in²
Ave Contact Pressure: 37.89 PSI
Contact to Void Ratio: 31%





GOODYEAR ULTRATORQUE PLUS R-1

- Same great design features as UltraTorque Radial
- Extra tall metric version equivalent to standard conventional sizes in overall diameter
- Excellent for applications where vehicle field clearance is maximized



Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32" in)	RCI	SRI
480/80R42	4UP442	TL	151A8/B	23	7,600	W14L, DW14L, W15L, DW15L, W16A, W16L, DW16A, DW16L, DD16	19.1	72.7	33.1	220	52	46	875
480/80R42	4UP542	TL	154A8/B	29	8,250	W14L, DW14L, W15L, DW15L, W16A, W16L, DW16A, DW16L, DD16	19.1	72.7	32.6	217	52	46	875

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
						Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	3,010	3,220	3,340	4,035	4,515	12	5,115
9	4,080	4,365	4,530	5,465	6,120	15	6,935
12	4,800	5,135	5,330	6,430	7,200	17	8,160
15	5,520	5,905	6,125	7,395	8,280	20	9,385
17	6,150	6,580	6,825	8,240	9,225	23	10,455
20	6,950	7,435	7,715	9,315	10,425	26	11,815
23	7,600	8,130	8,435	10,185	11,400	29	12,920
END OF 4UP442							
26	8,050	8,615	8,935	10,785	12,075	33	13,685
29	8,250	8,830	9,160	11,055	12,375	36	14,025

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32" in)	RCI	SRI
480/80R46	4UP547	TL	158A8/B	35	9,350	W14L, DW14L, W15L, DW15L, W16A, W16L, DW16A, DW16L, DD16	18.6	77.2	35.5	235	52	47	925

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
						Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	3,205	3,430	3,560	4,295	4,810	12	5,450
9	4,300	4,600	4,775	5,760	6,450	15	7,310
12	5,080	5,435	5,640	6,805	7,620	17	8,635
17	6,400	6,850	7,105	8,575	9,600	23	10,880
23	7,850	8,400	8,715	10,520	11,775	29	13,345
29	8,550	9,150	9,490	11,455	12,825	36	14,535
32	9,100	9,735	10,100	12,195	13,650	41	15,470
35	9,350	10,005	10,380	12,530	14,025	44	15,895





GOODYEAR ULTRATORQUE RADIAL R-1

- Excellent traction and tread cleaning in both wet and dry soil conditions provided by the open center tread and rugged design
- Long lasting treadwear provided by the patented riding cleat
- Able to carry heavier loads than comparable R-1 tires due to the metric design
- Dual marked in metric and conventional sizes



Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
420/80R46	4UT4G7	TL	151A8/B	35	7,600	W12A, W12B, W13A, W13B, DW13A, DW13B	16.5	72.5	33.8	218	50	46	925
Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		Inflation Pressure (psi)		6 mph			
6 (Duals)	2,560	2,740	2,840	3,430	3,840			12		4,350			
9	3,520	3,765	3,905	4,715	5,280			15		5,985			
12	4,080	4,365	4,530	5,465	6,120			17		6,935			
17	5,360	5,735	5,950	7,180	8,040			23		9,110			
23	6,400	6,850	7,105	8,575	9,600			29		10,880			
29	7,150	7,650	7,935	9,580	10,725			36		12,155			
32	7,400	7,920	8,215	9,915	11,100			41		12,580			
35	7,600	8,130	8,435	10,185	11,400			44		12,920			

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
420/90R30	4UT479	TL	142A8/B	23	5,840	W12, W13, DW13, DW13A, W14L, DW14A, W15L, DW15A	17.5	58.1	26.1	175	52	42	725
Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		Inflation Pressure (psi)		6 mph			
6 (Duals)	2,360	2,525	2,620	3,160	3,540			12		4,010			
9	3,200	3,425	3,550	4,290	4,800			15		5,440			
12	3,740	4,000	4,150	5,010	5,610			17		6,360			
15	4,180	4,475	4,640	5,600	6,270			20		7,105			
17	4,800	5,135	5,330	6,430	7,200			23		8,160			
20	5,360	5,735	5,950	7,180	8,040			26		9,110			
23	5,840	6,250	6,480	7,825	8,760			29		9,930			

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
480/80R38	4UT477	TL	149A8/B	23	7,150	W14L, DW14L, W15A, W15L, DW15L, W16A, W16L, DW16A, DW16L, DD16	19.8	68.1	30.9	206	52	45	825
Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		Inflation Pressure (psi)		6 mph			
6 (Duals)	2,905	3,110	3,225	3,895	4,360			12		4,940			
9	3,960	4,235	4,395	5,305	5,940			15		6,730			
12	4,540	4,860	5,040	6,085	6,810			17		7,720			
15	5,200	5,565	5,770	6,970	7,800			20		8,840			
17	5,840	6,250	6,480	7,825	8,760			23		9,930			
20	6,600	7,060	7,325	8,845	9,900			26		11,220			
23	7,150	7,650	7,935	9,580	10,725			29		12,155			





ULTRATORQUE RADIAL

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
520/85R38	4UT589	TL	155A8/B	23	8,550	W16A, DW16A, DD16, W18A, DW18A, DD18	20.3	72.8	32.5	219	54	46	875

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
						Inflation Pressure (psi)	6 mph
6 (Duals)	3,395	3,635	3,770	4,550	5,095	12	5,770
9	4,680	5,010	5,195	6,270	7,020	15	7,955
12	5,520	5,905	6,125	7,395	8,280	17	9,385
15	6,150	6,580	6,825	8,240	9,225	20	10,455
17	6,950	7,435	7,715	9,315	10,425	23	11,815
20	7,850	8,400	8,715	10,520	11,775	26	13,345
23	8,550	9,150	9,490	11,455	12,825	29	14,535



GOODYEAR OPTITORQUE R-1


Key Benefits

- R-1 design features 20% less tread depth than R-1W tires, reducing rutting
- Wider footprint reduces ground pressure and soil compaction
- Optimized lug arc provides great traction and excellent cleanout
- Increased lug surface area for improved wear and roading stability
- Large shoulder radius and wide lug nose for less soil residue disruption
- Ideal for front position on four-wheel spreaders, flotation options on sprayers and tractors



Traction	●●●●●●●●●●●●●●●●●●
Roadability	●●●●●●●●●●●●●●●●●●
Soil Protection	●●●●●●●●●●●●●●●●●●
Self Cleaning	●●●●●●●●●●●●●●●●○
Tread Wear	●●●●●●●●●●●●●●●●○

Application(s)



- LSW OPTIONS
- MINIMAL SOIL DISTURBANCE
- IMPROVED TREAD WEAR
- COST EFFECTIVE
- LOW SOIL COMPACTION
- ROADABILITY



OPTITORQUE



LSW OPTIONS



MINIMAL SOIL DISTURBANCE



IMPROVED TREAD WEAR



COST EFFECTIVE



LOW SOIL COMPACTION



ROADABILITY

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
VF230/95R32	V0T9N3	TL	143D	64	6,000	W7, W8	N/A	N/A	N/A	N/A	40	39	600
				Inflation Pressure (psi)	43 mph (lbs)	Duals (lbs)			40 mph (lbs)				
				32	3,715	3,270			4,080				
				35	3,805	3,350			4,180				
				41	4,130	3,635			4,540				
				46	4,495	3,955			4,940				
				52	4,730	4,160			5,200				
				55	4,880	4,295			5,360				
				58	5,025	4,420			5,520				
				64	5,460	4,805			6,000				

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
VF230/95R48	V0T9V4	TL	150D	64	7,400	W8	8.5	65.7	30.8	201	40	44	825
				Inflation Pressure (psi)	43 mph (lbs)	Duals (lbs)			40 mph (lbs)				
				32	4,625	4,070			5,080				
				35	4,730	4,160			5,200				
				41	5,170	4,550			5,680				
				46	5,595	4,925			6,150				
				52	6,005	5,285			6,600				
				55	6,190	5,445			6,800				
				58	6,325	5,565			6,950				
				64	6,735	5,925			7,400				

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI	
380/80R38	40T4M3	TL	142D	35	5,840	W11, W12, DW12A, W13	14.9	62.4	28.4	189	46	43	750	
				Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
				6 (Duals)	1,820	2,000	2,100	2,190	2,300	2,370	2,680	3,000	Inflation Pressure (psi)	6 mph (lbs)
				9	2,510	2,760	2,900	3,020	3,175	3,270	3,700	4,140	12	3,400
				12	2,910	3,200	3,360	3,505	3,680	3,790	4,290	4,800	15	4,690
				15	3,310	3,640	3,820	3,985	4,185	4,315	4,880	5,460	17	5,440
				17	3,805	4,180	4,390	4,575	4,805	4,955	5,600	6,270	20	6,190
				23	4,625	5,080	5,335	5,565	5,840	6,020	6,805	7,620	23	7,105
				29	5,025	5,520	5,795	6,045	6,350	6,540	7,395	8,280	29	8,635
				35	5,315	5,840	6,130	6,395	6,715	6,920	7,825	8,760	36	9,385
													44	9,930

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
380/105R54	40TWDS	TL	173D	73	14,300	W12A, W12B	16.5	85.8	39.9	262	47	49	1,075

See Next Page for the Load & Inflation Table



LSW OPTIONS



MINIMAL SOIL DISTURBANCE



IMPROVED TREAD WEAR



COST EFFECTIVE



LOW SOIL COMPACTION



ROADABILITY



40TWDS LOAD & INFLATION TABLE

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
38	8,510	9,350	9,820	10,240	10,755	11,080	12,530	14,025	48	15,895
41	8,780	9,650	10,135	10,565	11,100	11,435	12,930	14,475	51	16,405
46	9,555	10,500	11,025	11,500	12,075	12,445	14,070	15,750	58	17,850
52	10,010	11,000	11,550	12,045	12,650	13,035	14,740	16,500	64	18,700
58	10,645	11,700	12,285	12,810	13,455	13,865	15,680	17,550	70	19,890
64	11,650	12,800	13,440	14,015	14,720	15,170	17,150	19,200	75	21,760
70	12,650	13,900	14,595	15,220	15,985	16,470	18,625	20,850	81	23,630
73	13,015	14,300	15,015	15,660	16,445	16,945	19,160	21,450	84	24,310

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
420/85R34	40T4M4	TL	147D	35	6,800	W13, W14L, DW14A, W15A, W15L, DW15A	18.1	62.4	28.0	188	48	43	750


Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	2,150	2,360	2,480	2,585	2,715	2,795	3,160	3,540	12	4,010
9	2,910	3,200	3,360	3,505	3,680	3,790	4,290	4,800	15	5,440
12	3,405	3,740	3,925	4,095	4,300	4,430	5,010	5,610	17	6,360
15	3,915	4,300	4,515	4,710	4,945	5,095	5,760	6,450	20	7,310
17	4,370	4,800	5,040	5,255	5,520	5,690	6,430	7,200	23	8,160
23	5,315	5,840	6,130	6,395	6,715	6,920	7,825	8,760	29	9,930
29	5,825	6,400	6,720	7,010	7,360	7,585	8,575	9,600	36	10,880
35	6,190	6,800	7,140	7,445	7,820	8,060	9,110	10,200	44	11,560

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
VF420/95R50	V0T7CD	TL	177D	52	16,100	W13, W13A, W13B, DW13B, W14L, DW14L, W15A, W15B, DW15A, DW15B	16.9	81.5	36.8	246	50	48	1,025

Inflation Pressure (psi)	43 mph (lbs)	Duals (lbs)	40 mph (lbs)	Duals (lbs)
12	6,325	5,565	6,950	6,115
17	8,010	7,050	8,800	7,745
23	10,010	8,810	11,000	9,680
29	10,920	9,610	12,000	10,560
35	11,650	10,250	12,800	11,265
41	12,650	11,130	13,900	12,230
46	13,830	12,170	15,200	13,375
52	14,650	12,890	16,100	14,170

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
480/80R50	40T451	TL	159D	35	9,650	W14L, DW14L, W15A, W15B, W15L, DW15A, DW15B, DW15L, W16L, DW16A, DW16B, DW16L	18.9	81.4	37.0	246	50	48	975

See Next Page for the Load & Inflation Table



LSW OPTIONS



MINIMAL SOIL DISTURBANCE



IMPROVED TREAD WEAR



COST EFFECTIVE



LOW SOIL COMPACTION



ROADABILITY

40T451 LOAD & INFLATION TABLE

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	2,995	3,290	3,455	3,605	3,785	3,900	4,410	4,935	12	5,595
9	4,130	4,540	4,765	4,970	5,220	5,380	6,085	6,810	15	7,720
12	4,730	5,200	5,460	5,695	5,980	6,160	6,970	7,800	17	8,840
15	5,460	6,000	6,300	6,570	6,900	7,110	8,040	9,000	20	10,200
17	6,190	6,800	7,140	7,445	7,820	8,060	9,110	10,200	23	11,560
23	7,510	8,250	8,665	9,035	9,490	9,775	11,055	12,375	29	14,025
29	8,280	9,100	9,555	9,965	10,465	10,785	12,195	13,650	36	15,470
35	8,780	9,650	10,135	10,565	11,100	11,435	12,930	14,475	44	16,405

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
VF480/80R50	V0T751	TL	179D	52	17,100	W15A, W15B, DW15A, DW15B, DW16A, DW16B	18.7	81.0	36.9	245	50	48	975
Inflation Pressure (psi)		43 mph (lbs)		Duals (lbs)		Cyclic Service							
12		6,735		5,925		40 mph (lbs)		Duals (lbs)					
17		8,510		7,490		7,400		6,510					
23		10,645		9,370		9,350		8,230					
29		11,650		10,250		11,700		10,295					
35		12,375		10,890		12,800		11,265					
41		13,470		11,855		13,600		11,970					
46		14,650		12,890		14,800		13,025					
52		15,560		13,695		16,100		14,170					
						17,100		15,050					

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
LSW480/70R54	G0TT51	TL	181D	64	18,200	W16A	18.9	81.3	37.2	247	50	48	975
Inflation Pressure (psi)		43 mph (lbs)		Duals (lbs)		Cyclic Service							
32		11,195		9,850		40 mph (lbs)		Duals (lbs)					
35		11,650		10,250		12,300		10,825					
41		12,650		11,130		12,800		11,265					
46		13,470		11,855		13,900		12,230					
52		14,650		12,890		14,800		13,025					
58		15,015		13,215		16,100		14,170					
64		16,560		14,575		16,500		14,520					
						18,200		16,015					

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
650/65R38	40T5KZ	TL	166D	41	11,700	DW20B, MW20B, DW21B, DW23B, MW23B	24.9	71.4	32.6	217	50	--	875
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service				
9	4,625	5,080	5,335	5,565	5,840	6,020	6,805	7,620	Inflation Pressure (psi)		6 mph (lbs)		
12	5,315	5,840	6,130	6,395	6,715	6,920	7,825	8,760	15		8,635		
17	6,915	7,600	7,980	8,320	8,740	9,005	10,185	11,400	17		9,930		
23	8,280	9,100	9,555	9,965	10,465	10,785	12,195	13,650	23		12,920		
29	9,010	9,900	10,395	10,840	11,385	11,730	13,265	14,850	29		15,470		
35	9,735	10,700	11,235	11,715	12,305	12,680	14,340	16,050	36		16,830		
38	10,375	11,400	11,970	12,485	13,110	13,510	15,275	17,100	44		18,190		
41	10,645	11,700	12,285	12,810	13,455	13,865	15,680	17,550	48		19,380		
										51		19,890	



Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
VF650/65R38	V0T4KZ	TL	175D	35	15,200	DW23B, MW23B	26.4	71.2	30.5	211	50	--	875
Inflation Pressure (psi)		43 mph (lbs)		Duals (lbs)		40 mph (lbs)		Duals (lbs)					
9		6,505		5,725		7,150		6,290					
12		7,510		6,610		8,250		7,260					
17		9,735		8,565		10,700		9,415					
23		11,650		10,250		12,800		11,265					
29		12,650		11,130		13,900		12,230					
35		13,830		12,170		15,200		13,375					

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
LSW680/55R42	G0TFTL	TL	171D	29	13,600	DW23B	25.7	72.5	32.5	218	50	46	875
Inflation Pressure (psi)		43 mph (lbs)		40 mph (lbs)		Cyclic Service							
12		7,145		7,850		20 mph (lbs)		10 mph (lbs)					
15		8,010		8,800		8,840		10,540					
17		9,280		10,200		9,880		11,780					
20		10,375		11,400		11,115		13,255					
23		11,195		12,300		12,545		14,960					
26		12,010		13,200		13,650		16,275					
29		12,375		13,600		14,300		17,050					
						15,210		18,135					

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
710/70R42	40T691	TL	179D	46	17,100	DW23B, MW23B, DW25B, MW25B	27.5	81.4	37.0	246	58	48	975
Inflation Pressure (psi)		43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service			
9	6,005	6,600	6,930	7,225	7,590	7,820	8,845	9,900	Inflation Pressure (psi)		6 mph (lbs)		
12	7,145	7,850	8,245	8,595	9,030	9,300	10,520	11,775	15	11,220			
17	9,010	9,900	10,395	10,840	11,385	11,730	13,265	14,850	17	13,345			
23	11,195	12,300	12,915	13,470	14,145	14,575	16,480	18,450	23	16,830			
29	12,375	13,600	14,280	14,890	15,640	16,115	18,225	20,400	29	20,910			
35	13,015	14,300	15,015	15,660	16,445	16,945	19,160	21,450	36	23,120			
41	14,285	15,700	16,485	17,190	18,055	18,605	21,040	23,550	44	24,310			
46	15,560	17,100	17,955	18,725	19,665	20,265	22,915	25,650	51	26,690			
									58	29,070			

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
LSW710/65R46	G0TMMK	TL	188D	46	22,000	DW25B, DW28B	28.9	81.0	36.0	243	58	48	975



See Next Page for the Load & Inflation Table



LSW OPTIONS



MINIMAL SOIL DISTURBANCE



IMPROVED TREAD WEAR



COST EFFECTIVE



LOW SOIL COMPACTION



ROADABILITY

GOTMMK LOAD & INFLATION TABLE

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	Cyclic Service	
			20 mph (lbs)	10 mph (lbs)
23	14,285	15,700	17,680	21,080
29	16,015	17,600	19,760	23,560
32	16,560	18,200	20,410	24,335
35	17,015	18,700	20,930	24,955
38	18,020	19,800	22,230	26,505
41	19,020	20,900	22,880	27,280
46	20,020	22,000	25,090	29,915

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
750/50R26	40T4S1	TL	157D	35	9,100	DW23B, DW25B	28.7	54.9	24.6	165	40	--	675

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
9	3,715	4,080	4,285	4,470	4,690	4,835	5,465	6,120	15	6,935
12	4,370	4,800	5,040	5,255	5,520	5,690	6,430	7,200	17	8,160
15	5,025	5,520	5,795	6,045	6,350	6,540	7,395	8,280	20	9,385
17	5,595	6,150	6,460	6,735	7,070	7,290	8,240	9,225	23	10,455
23	6,915	7,600	7,980	8,320	8,740	9,005	10,185	11,400	29	12,920
29	7,510	8,250	8,665	9,035	9,490	9,775	11,055	12,375	36	14,025
32	8,010	8,800	9,240	9,635	10,120	10,430	11,790	13,200	41	14,960
35	8,280	9,100	9,555	9,965	10,465	10,785	12,195	13,650	44	15,470

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
800/70R38	40T5M8	TL	181D	41	18,200	DW25B, MW25B, DW27B, MW27B, MW28B	32.2	82.0	36.4	246	59	48	975

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
9	6,915	7,600	7,980	8,320	8,740	9,005	10,185	11,400	15	12,920
12	8,280	9,100	9,555	9,965	10,465	10,785	12,195	13,650	17	15,470
15	9,280	10,200	10,710	11,170	11,730	12,085	13,670	15,300	20	17,340
17	10,645	11,700	12,285	12,810	13,455	13,865	15,680	17,550	23	19,890
23	13,015	14,300	15,015	15,660	16,445	16,945	19,160	21,450	29	24,310
29	14,285	15,700	16,485	17,190	18,055	18,605	21,040	23,550	36	26,690
35	15,015	16,500	17,325	18,070	18,975	19,555	22,110	24,750	44	28,050
41	16,560	18,200	19,110	19,930	20,930	21,565	24,390	27,300	51	30,940

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
LSW800/55R46	GOTMM8	TL	190D	46	23,400	DW28B	31.7	81.6	36.2	245	59	48	975

See Next Page for the Load & Inflation Table



GOTMM8 LOAD & INFLATION TABLE

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	Cyclic Service	
			20 mph (lbs)	10 mph (lbs)
23	15,015	16,500	18,070	21,545
29	16,560	18,200	20,410	24,335
32	17,565	19,300	20,930	24,955
35	18,020	19,800	22,230	26,505
38	18,565	20,400	22,880	27,280
41	19,565	21,500	24,310	28,985
46	21,295	23,400	25,740	30,690

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
VF1000/50R25CFO	V0TMF3	TL	190D	46	23,400	36.0TH	40.7	64.6	27.7	191	55	--	775

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	Cyclic Service	
			20 mph (lbs)	10 mph (lbs)
23	15,015	16,500	18,590	22,165
29	16,560	18,200	20,410	24,335
32	17,565	19,300	21,450	25,575
35	18,020	19,800	22,230	26,505
38	19,020	20,900	22,880	27,280
41	19,565	21,500	24,310	28,985
46	21,295	23,400	25,740	30,690

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
VF1050/50R32CFO	V0TM43	TL	196D	46	27,600	36.00VA	42.0	75.5	31.9	223	55	46	875

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	Cyclic Service	
			20 mph (lbs)	10 mph (lbs)
23	18,020	19,800	22,230	26,505
29	20,020	22,000	24,310	28,985
32	20,655	22,700	25,090	29,915
35	21,295	23,400	26,520	31,620
38	22,475	24,700	27,170	32,395
41	23,660	26,000	28,600	34,100
46	25,115	27,600	31,200	37,200



- 

LSW OPTIONS
- 

MINIMAL SOIL DISTURBANCE
- 

IMPROVED TREAD WEAR
- 

COST EFFECTIVE
- 

LOW SOIL COMPACTION
- 

ROADABILITY





GOODYEAR ULTRA SPRAYER R-1

Key Benefits

- High flex carcass technology/20% more load at same pressure
- Significant increase in lug surface area for improved lug durability
- Will handle speeds to 40 mph
- Designed for sprayers to reduce ground pressure
- Increased lug bracing for high load durability



Application(s)





Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
IF320/90R42	FUSDJM	TL	157D	64	9,100	W10, W10A, W11	13.2	65.3	N/A	N/A	47	44	800
Inflation Pressure (psi)		43 mph (lbs)		Duals (lbs)		40 mph (lbs)		Duals (lbs)					
32		5,595		4,925		6,150		5,410					
35		5,825		5,125		6,400		5,630					
41		6,325		5,565		6,950		6,115					
46		6,915		6,085		7,600		6,690					
49		7,145		6,290		7,850		6,910					
52		7,325		6,445		8,050		7,085					
58		7,780		6,845		8,550		7,525					
61		8,010		7,050		8,800		7,745					
64		8,280		7,285		9,100		8,010					



Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
IF320/90R46	FUSDT5	TL	159D	64	9,650	W10, W10A, DW10A, W11	12.5	70.1	32.4	214	47	45	875
Inflation Pressure (psi)		43 mph (lbs)		Duals (lbs)		40 mph (lbs)		Duals (lbs)					
32		6,005		5,285		6,600		5,810					
35		6,005		5,285		6,600		5,810					
41		6,735		5,925		7,400		6,510					
46		7,145		6,290		7,850		6,910					
49		7,510		6,610		8,250		7,260					
52		7,780		6,845		8,550		7,525					
58		8,010		7,050		8,800		7,745					
61		8,510		7,490		9,350		8,230					
64		8,780		7,725		9,650		8,490					

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
VF320/90R50	VUS0V6	TL	169D	70	12,800	W10, W10A, W10L, DW10, DW10A, W11, DW11	12.9	73.6	34.1	224	47	46	925
Inflation Pressure (psi)		43 mph (lbs)		Duals (lbs)		40 mph (lbs)		Duals (lbs)					
35		7,510		6,610		8,250		7,260					
41		8,010		7,050		8,800		7,745					
46		8,780		7,725		9,650		8,490					
52		9,280		8,165		10,200		8,975					
55		9,555		8,410		10,500		9,240					
58		9,735		8,565		10,700		9,415					
64		10,645		9,370		11,700		10,295					
67		11,195		9,850		12,300		10,825					
70		11,650		10,250		12,800		11,265					

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
IF320/90R54	FUSD43	TL	162D	64	10,500	W10A	12.8	77.9	36.4	238	47	47	975

See Next Page for the Load & Inflation Table



ULTRA SPRAYER



MINIMAL SOIL DISTURBANCE



IMPROVED TREAD WEAR



ROADABILITY



COST EFFECTIVE

FUSD43 LOAD & INFLATION TABLE

Inflation Pressure (psi)	43 mph (lbs)	Duals (lbs)	40 mph (lbs)	Duals (lbs)
32	6,505	5,725	7,150	6,290
35	6,735	5,925	7,400	6,510
41	7,325	6,445	8,050	7,085
46	7,780	6,845	8,550	7,525
49	8,010	7,050	8,800	7,745
52	8,280	7,285	9,100	8,010
58	8,780	7,725	9,650	8,490
61	9,280	8,165	10,200	8,975
64	9,555	8,410	10,500	9,240

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
IF320/105R54	FUSDMN	TL	167D	64	12,000	W10A	12.9	80.5	37.4	246	47	48	1,025
Inflation Pressure (psi)	43 mph (lbs)	Duals (lbs)	40 mph (lbs)	Duals (lbs)									
32	7,325	6,445	8,050	7,085									
35	7,510	6,610	8,250	7,260									
41	8,280	7,285	9,100	8,010									
46	8,780	7,725	9,650	8,490									
49	9,280	8,165	10,200	8,975									
52	9,555	8,410	10,500	9,240									
58	10,010	8,810	11,000	9,680									
61	10,375	9,130	11,400	10,030									
64	10,920	9,610	12,000	10,560									

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
IF380/80R38	FUSDM3	TL	161D	64	10,200	W12, DW12, DW12A, W13	14.1	62.5	28.6	190	49	43	750
Inflation Pressure (psi)	43 mph (lbs)	Duals (lbs)	40 mph (lbs)	Duals (lbs)									
32	6,325	5,565	6,950	6,115									
35	6,505	5,725	7,150	6,290									
41	7,145	6,290	7,850	6,910									
46	7,510	6,610	8,250	7,260									
49	7,780	6,845	8,550	7,525									
52	8,010	7,050	8,800	7,745									
58	8,510	7,490	9,350	8,230									
61	9,010	7,930	9,900	8,710									
64	9,280	8,165	10,200	8,975									

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
VF380/90R46	VUSD32	TL	173D	64	14,300	W12A, W12B, W13A, W13B, DW13A, DW13B	15.2	72.8	33.2	221	49	46	925

See Next Page for the Load & Inflation Table



MINIMAL SOIL DISTURBANCE



IMPROVED TREAD WEAR



ROADABILITY



COST EFFECTIVE



VUSD32 LOAD & INFLATION TABLE

Inflation Pressure (psi)	43 mph (lbs)	Duals (lbs)	40 mph (lbs)	Duals (lbs)
32	9,010	7,930	9,900	8,710
35	9,280	8,165	10,200	8,975
41	10,010	8,810	11,000	9,680
46	10,920	9,610	12,000	10,560
49	11,195	9,850	12,300	10,825
52	11,650	10,250	12,800	11,265
58	12,010	10,570	13,200	11,615
61	12,650	11,130	13,900	12,230
64	13,015	11,455	14,300	12,585

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
IF380/90R50	FUSDJR	TL	170D	64	13,200	W12A, W12B, DW12A, W13A, W13B, DW13B	15.1	77.0	35.6	235	49	47	975
Inflation Pressure (psi)	43 mph (lbs)	Duals (lbs)	40 mph (lbs)	Duals (lbs)									
32	8,010	7,050	8,800	7,745									
35	8,280	7,285	9,100	8,010									
41	9,010	7,930	9,900	8,710									
46	9,735	8,565	10,700	9,415									
49	10,010	8,810	11,000	9,680									
52	10,375	9,130	11,400	10,030									
58	10,920	9,610	12,000	10,560									
61	11,195	9,850	12,300	10,825									
64	12,010	10,570	13,200	11,615									

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
IF380/90R54	FUSDV9	TL	171D	64	13,600	W12A, W12B	14.4	80.8	37.5	246	49	48	1,025
Inflation Pressure (psi)	43 mph (lbs)	Duals (lbs)	40 mph (lbs)	Duals (lbs)									
32	8,280	7,285	9,100	8,010									
35	8,510	7,490	9,350	8,230									
41	9,280	8,165	10,200	8,975									
46	10,010	8,810	11,000	9,680									
49	10,375	9,130	11,400	10,030									
52	10,645	9,370	11,700	10,295									
58	11,195	9,850	12,300	10,825									
61	12,010	10,570	13,200	11,615									
64	12,375	10,890	13,600	11,970									

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
VF380/105R50	VUSDDT	TL	179D	64	17,100	W12A, W12B, DW12A, W13A, W13B, DW13B	15.2	80.5	36.5	243	49	48	1,025
Inflation Pressure (psi)	43 mph (lbs)	Duals (lbs)	40 mph (lbs)	Duals (lbs)									
32	10,645	9,370	11,700	10,295									
35	10,920	9,610	12,000	10,560									
41	12,010	10,570	13,200	11,615									
46	12,650	11,130	13,900	12,230									
49	13,470	11,855	14,800	13,025									
52	13,830	12,170	15,200	13,375									
58	14,285	12,570	15,700	13,815									
61	15,015	13,215	16,500	14,520									
64	15,560	13,695	17,100	15,050									



ULTIMATE FLEX TECHNOLOGY™



MINIMAL SOIL DISTURBANCE



IMPROVED TREAD WEAR



ROADABILITY



COST EFFECTIVE

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
*UFT380/90R46	UUS432	TL	176D	70	15,700	W12A, W12B, W13A, W13B, DW13A, DW13B	15.1	73.6	33.7	223	49	46	925
			171D	70	13,600		15.1	73.6	34.0	224			
			168D	78	12,300		15.0	73.6	34.3	225			

FOR USE AS STANDARD 380/90R46

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
41	7,145	7,850	8,245	8,595	9,030	9,300	10,520	11,775
46	7,780	8,550	8,980	9,360	9,835	10,130	11,455	12,825
52	8,280	9,100	9,555	9,965	10,465	10,785	12,195	13,650
55	8,510	9,350	9,820	10,240	10,755	11,080	12,530	14,025
58	8,780	9,650	10,135	10,565	11,100	11,435	12,930	14,475
64	9,555	10,500	11,025	11,500	12,075	12,445	14,070	15,750
70	10,375	11,400	11,970	12,485	13,110	13,510	15,275	17,100
73	10,645	11,700	12,285	12,810	13,455	13,865	15,680	17,550
78	11,195	12,300	12,915	13,470	14,145	14,575	16,480	18,450

FOR USE AS STANDARD IF380/90R46

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
35	7,780	8,550	8,890	9,065	9,835	10,860
41	8,510	9,350	9,725	9,910	10,755	11,875
46	9,280	10,200	10,610	10,810	11,730	12,955
52	9,735	10,700	11,130	11,340	12,305	13,590
55	10,010	11,000	11,440	11,660	12,650	13,970
58	10,375	11,400	11,855	12,085	13,110	14,480
64	11,195	12,300	12,790	13,040	14,145	15,620
67	11,650	12,800	13,310	13,570	14,720	16,255
70	12,375	13,600	14,145	14,415	15,640	17,270

FOR USE AS STANDARD VF380/90R46

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
35	9,280	10,200	10,405	10,505	10,710	11,220
41	10,010	11,000	11,220	11,330	11,550	12,100
46	10,920	12,000	12,240	12,360	12,600	13,200
52	11,650	12,800	13,055	13,185	13,440	14,080
55	12,010	13,200	13,465	13,595	13,860	14,520
58	12,010	13,200	13,465	13,595	13,860	14,520
64	13,015	14,300	14,585	14,730	15,015	15,730
67	13,830	15,200	15,505	15,655	15,960	16,720
70	14,285	15,700	16,015	16,170	16,485	17,270

* Coming Soon

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
*UFT380/105R50	UUS2DT	TL	179D	64	17,100	W12A, W12B, DW12A, W13A, W13B, DW13B	N/A	N/A	N/A	N/A	49	48	1,025
			177D	70	16,100		N/A	N/A	N/A	N/A			
			170D	70	13,200		N/A	N/A	N/A	N/A			

FOR USE AS STANDARD 380/105R50

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
35	7,780	8,550	8,980	9,360	9,835	10,130	11,455	12,825
41	8,510	9,350	9,820	10,240	10,755	11,080	12,530	14,025
46	9,280	10,200	10,710	11,170	11,730	12,085	13,670	15,300
52	9,735	10,700	11,235	11,715	12,305	12,680	14,340	16,050
55	10,010	11,000	11,550	12,045	12,650	13,035	14,740	16,500
58	10,375	11,400	11,970	12,485	13,110	13,510	15,275	17,100
64	11,195	12,300	12,915	13,470	14,145	14,575	16,480	18,450
67	11,650	12,800	13,440	14,015	14,720	15,170	17,150	19,200
70	12,010	13,200	13,860	14,455	15,180	15,640	17,690	19,800



FOR USE AS STANDARD IF380/105R50

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
35	9,280	10,200	10,610	10,810	11,730	12,955
41	10,375	11,400	11,855	12,085	13,110	14,480
46	10,920	12,000	12,480	12,720	13,800	15,240
52	11,650	12,800	13,310	13,570	14,720	16,255
55	12,010	13,200	13,730	13,990	15,180	16,765
58	12,375	13,600	14,145	14,415	15,640	17,270
64	13,470	14,800	15,390	15,690	17,020	18,795
67	13,830	15,200	15,810	16,110	17,480	19,305
70	14,650	16,100	16,745	17,065	18,515	20,445

FOR USE AS STANDARD VF380/105R50

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
35	10,920	12,000	12,240	12,360	12,600	13,200
41	12,010	13,200	13,465	13,595	13,860	14,520
46	12,650	13,900	14,180	14,315	14,595	15,290
52	13,830	15,200	15,505	15,655	15,960	16,720
55	14,285	15,700	16,015	16,170	16,485	17,270
58	14,285	15,700	16,015	16,170	16,485	17,270
64	15,560	17,100	17,440	17,615	17,955	18,810

* Coming Soon



MINIMAL SOIL DISTURBANCE



IMPROVED TREAD WEAR



ROADABILITY



COST EFFECTIVE



GOODYEAR DYNA TORQUE RADIAL R-1

- Reduced vibration in field and road service
- Improved traction from its three-pitch tread design
- Longer body life provided by its natural shape casing



Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
320/85R34	4DT5H5	TL	133A8/B	35	4,540	W9, W10, DW10, W11, DW11	12.9	56.0	25.7	170	46	41	675

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
						Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	1,550	1,660	1,720	2,075	2,325	12	2,635
9	2,150	2,300	2,385	2,880	3,225	15	3,655
15	2,830	3,030	3,140	3,790	4,245	20	4,810
20	3,520	3,765	3,905	4,715	5,280	26	5,985
26	4,080	4,365	4,530	5,465	6,120	33	6,935
29	4,300	4,600	4,775	5,760	6,450	36	7,310
32	4,400	4,710	4,885	5,895	6,600	41	7,480
35	4,540	4,860	5,040	6,085	6,810	44	7,720

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
380/85R46	4DT4H2	TL	146D	46	6,600	W12A, W13A, DW13A	15.1	72.8	34.0	223	49	--	875

Inflation Pressure (psi)	40 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
						Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	2,360	2,715	2,795	3,160	3,540	12	4,010
9	2,600	2,990	3,080	3,485	3,900	15	4,420
12	3,080	3,540	3,650	4,125	4,620	17	5,235
17	3,960	4,555	4,695	5,305	5,940	23	6,730
23	4,800	5,520	5,690	6,430	7,200	29	8,160
35	5,680	6,530	6,730	7,610	8,520	44	9,655
41	6,150	7,070	7,290	8,240	9,225	51	10,455
46	6,600	7,590	7,820	8,845	9,900	58	11,220

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
420/85R26	4DT446	TL	138A8/B	23	5,200	W12, DW12, W13, W14L, DW14A, W15L, DW15A	17.1	54.4	24.4	164	50	40	650

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
						Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	2,060	2,205	2,285	2,760	3,090	12	3,500
9	2,830	3,030	3,140	3,790	4,245	15	4,810
12	3,300	3,530	3,665	4,420	4,950	17	5,610
15	3,740	4,000	4,150	5,010	5,610	20	6,360
17	4,300	4,600	4,775	5,760	6,450	23	7,310
20	4,680	5,010	5,195	6,270	7,020	26	7,955
23	5,200	5,565	5,770	6,970	7,800	29	8,840



Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
420/90R30	4DT479	TL	142A8/B	23	5,840	W12, W13, DW13, DW13A, W14L, DW14A, W15L, DW15A	17.2	58.5	26.2	175	50	42	725
Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service							
						Inflation Pressure (psi)	6 mph (lbs)						
6 (Duals)	2,360	2,525	2,620	3,160	3,540	12	4,010						
9	3,200	3,425	3,550	4,290	4,800	15	5,440						
12	3,740	4,000	4,150	5,010	5,610	17	6,360						
15	4,180	4,475	4,640	5,600	6,270	20	7,105						
17	4,800	5,135	5,330	6,430	7,200	23	8,160						
20	5,360	5,735	5,950	7,180	8,040	26	9,110						
23	5,840	6,250	6,480	7,825	8,760	29	9,930						

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
480/80R38	4DT477	TL	149A8/B	23	7,150	W14L, DW14L, W15A, W15L, DW15L, W16A, W16L, DW16A, DW16L, DD16	20.2	68.8	30.9	207	52	45	825
Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service							
						Inflation Pressure (psi)	6 mph (lbs)						
6 (Duals)	2,905	3,110	3,225	3,895	4,360	12	4,940						
9	3,960	4,235	4,395	5,305	5,940	15	6,730						
12	4,540	4,860	5,040	6,085	6,810	17	7,720						
15	5,200	5,565	5,770	6,970	7,800	20	8,840						
17	5,840	6,250	6,480	7,825	8,760	23	9,930						
20	6,600	7,060	7,325	8,845	9,900	26	11,220						
23	7,150	7,650	7,935	9,580	10,725	29	12,155						

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
480/80R46	4DT547	TL	158A8/B	35	9,350	W14L, DW14L, W15L, DW15L, W16A, W16L, DW16A, DW16L, DD16	18.9	77.1	35.0	232	52	47	925
Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service							
						Inflation Pressure (psi)	6 mph (lbs)						
6 (Duals)	3,205	3,430	3,560	4,295	4,810	12	5,450						
9	4,300	4,600	4,775	5,760	6,450	15	7,310						
12	5,080	5,435	5,640	6,805	7,620	17	8,635						
17	6,400	6,850	7,105	8,575	9,600	23	10,880						
23	7,850	8,400	8,715	10,520	11,775	29	13,345						
29	8,550	9,150	9,490	11,455	12,825	36	14,535						
32	9,100	9,735	10,100	12,195	13,650	41	15,470						
35	9,350	10,005	10,380	12,530	14,025	44	15,895						

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
480/85R26	4DT456	TL	145A8/B	23	6,400	DW14A, W15L, DW15A, W16L, DW16A	19.1	57.3	25.3	172	52	41	700

See Next Page for the Load & Inflation Table





4DT56 LOAD & INFLATION TABLE							
Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
						Inflation Pressure (psi)	6 mph (lbs)
9	3,520	3,765	3,905	4,715	5,280	15	5,985
12	4,080	4,365	4,530	5,465	6,120	17	6,935
15	4,680	5,010	5,195	6,270	7,020	20	7,955
17	5,200	5,565	5,770	6,970	7,800	23	8,840
20	5,840	6,250	6,480	7,825	8,760	26	9,930
23	6,400	6,850	7,105	8,575	9,600	29	10,880

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
520/85R38	4DT589	TL	155A8/B	23	8,550	W16A, DW16A, DD16, W18A, DW18A, DD18	21.7	72.3	32.3	217	53	46	875

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
						Inflation Pressure (psi)	6 mph (lbs)
9	4,680	5,010	5,195	6,270	7,020	15	7,955
12	5,520	5,905	6,125	7,395	8,280	17	9,385
15	6,150	6,580	6,825	8,240	9,225	20	10,455
17	6,950	7,435	7,715	9,315	10,425	23	11,815
20	7,850	8,400	8,715	10,520	11,775	26	13,345
23	8,550	9,150	9,490	11,455	12,825	29	14,535

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
520/85R42	4DT452	TL	157A8/B	23	9,100	W15L, W16A, W16L, DW16A, DW16L, DD16, DD16L, W18A, W18L, DW18A, DW18B, DD18, DD18L	21.2	76.2	34.2	229	53	47	925

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
						Inflation Pressure (psi)	6 mph (lbs)
9	4,940	5,285	5,485	6,620	7,410	15	8,400
12	5,680	6,080	6,305	7,610	8,520	17	9,655
15	6,600	7,060	7,325	8,845	9,900	20	11,220
17	7,400	7,920	8,215	9,915	11,100	23	12,580
20	8,250	8,830	9,160	11,055	12,375	26	14,025
23	9,100	9,735	10,100	12,195	13,650	29	15,470

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
650/75R32	4DT6F9	TL	172A8/B	46	13,900	DW20B, DW21B, DH21, DH21B, DH21HB, DW23B	25.9	70.7	32.1	214	55	45	875

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
						Inflation Pressure (psi)	6 mph (lbs)
9	5,520	5,905	6,125	7,395	8,280	15	9,385
12	6,400	6,850	7,105	8,575	9,600	17	10,880
17	8,250	8,830	9,160	11,055	12,375	23	14,025
23	9,900	10,595	10,990	13,265	14,850	29	16,830
29	11,000	11,770	12,210	14,740	16,500	36	18,700
35	12,000	12,840	13,320	16,080	18,000	44	20,400
41	12,800	13,695	14,210	17,150	19,200	51	21,760
46	13,900	14,875	15,430	18,625	20,850	58	23,630



DYNA TORQUE II R-1

- Reduced vibration in the field from its long bar/short bar design
- Excellent roadability
- Maximum traction provided by the increased lug count



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
7-12	42D682	TL	6	36	910	5JA	6.9	24.4	11.0	72	23	--	290

Inflation Pressure (psi)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
12	430	480	515	625	670
18	540	600	640	780	840
24	645	715	765	930	1,000
28	705	785	840	1,020	1,100
30	725	805	860	1,045	1,125
32	745	825	885	1,075	1,155
34	790	880	940	1,145	1,230
36	820	910	975	1,185	1,275

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
11.2-16	42D3R5	TL	4	18	1,280	W10L	11.8	35.5	16.2	106	44	32	425

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12	900	990	1,060	1,100	1,325	1,485	16	1,685	1,850
14	1,000	1,100	1,175	1,220	1,475	1,650	18	1,870	2,055
16	1,090	1,200	1,285	1,330	1,610	1,800	20	2,040	2,245
18	1,165	1,280	1,370	1,420	1,715	1,920	24	2,175	2,395

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
12.4-38	42D318	TL	14	56	4,800	W9, W10, W10L, DW10, W11, DW11, DW11A	12.4	59.5	28.2	177	40	42	725

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
20	2,365	2,600	2,780	2,885	3,485	3,900	26	4,420	4,860
28	2,910	3,200	3,425	3,550	4,290	4,800	36	5,440	5,985
36	3,405	3,740	4,000	4,150	5,010	5,610	46	6,360	6,995
40	3,605	3,960	4,235	4,395	5,305	5,940	52	6,730	7,405
44	3,805	4,180	4,475	4,640	5,600	6,270	58	7,105	7,815
48	4,005	4,400	4,710	4,885	5,895	6,600	62	7,480	8,230
52	4,260	4,680	5,010	5,195	6,270	7,020	68	7,955	8,750
56	4,370	4,800	5,135	5,330	6,430	7,200	72	8,160	8,975





DYNA TORQUE II

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
13.6-24	42D822	TL	8	28	3,080	W10, W10L, DW10, W11, DW11, W12, DW12	14.2	48.7	22.2	144	47	38	575

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12	1,700	1,870	2,000	2,075	2,505	2,805	16	3,180	3,495
16	2,000	2,200	2,355	2,440	2,950	3,300	20	3,740	4,115
18	2,130	2,340	2,505	2,595	3,135	3,510	24	3,980	4,375
20	2,310	2,540	2,720	2,820	3,405	3,810	26	4,320	4,750
22	2,440	2,680	2,870	2,975	3,590	4,020	28	4,555	5,010
24	2,575	2,830	3,030	3,140	3,790	4,245	32	4,810	5,290
26	2,650	2,910	3,115	3,230	3,900	4,365	34	4,945	5,440
28	2,805	3,080	3,295	3,420	4,125	4,620	36	5,235	5,760

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
16.9-26	42D046	TL	10	28	4,540	DW14A, W15L, DW15A	17.4	54.8	25.2	163	49	40	650

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12	2,510	2,760	2,955	3,065	3,700	4,140	16	4,690	5,160
16	3,005	3,300	3,530	3,665	4,420	4,950	20	5,610	6,170
18	3,205	3,520	3,765	3,905	4,715	5,280	24	5,985	6,580
20	3,405	3,740	4,000	4,150	5,010	5,610	26	6,360	6,995
22	3,605	3,960	4,235	4,395	5,305	5,940	28	6,730	7,405
24	3,805	4,180	4,475	4,640	5,600	6,270	32	7,105	7,815
26	4,005	4,400	4,710	4,885	5,895	6,600	34	7,480	8,230
28	4,130	4,540	4,860	5,040	6,085	6,810	36	7,720	8,490

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
16.9-28	42D048	TL	10	28	4,680	W14L, DW14L, W15L, DW15L	17.4	56.8	26.2	169	50	41	675

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12	2,650	2,910	3,115	3,230	3,900	4,365	16	4,945	5,440
16	3,110	3,420	3,660	3,795	4,585	5,130	20	5,815	6,395
18	3,310	3,640	3,895	4,040	4,880	5,460	24	6,190	6,805
20	3,515	3,860	4,130	4,285	5,170	5,790	26	6,560	7,220
22	3,715	4,080	4,365	4,530	5,465	6,120	28	6,935	7,630
24	3,915	4,300	4,600	4,775	5,760	6,450	32	7,310	8,040
26	4,130	4,540	4,860	5,040	6,085	6,810	34	7,720	8,490
28	4,260	4,680	5,010	5,195	6,270	7,020	36	7,955	8,750

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
18.4-26	42D156	TL	12	32	5,840	W15L, DW15A, DW16A	19.0	57.1	26.1	170	52	41	700

See Next Page for the Load & Inflation Table



42D156 LOAD & INFLATION TABLE									
Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12	3,005	3,300	3,530	3,665	4,420	4,950	16	5,610	6,170
16	3,605	3,960	4,235	4,395	5,305	5,940	20	6,730	7,405
20	4,130	4,540	4,860	5,040	6,085	6,810	26	7,720	8,490
24	4,495	4,940	5,285	5,485	6,620	7,410	32	8,400	9,240
26	4,730	5,200	5,565	5,770	6,970	7,800	34	8,840	9,725
28	5,025	5,520	5,905	6,125	7,395	8,280	36	9,385	10,320
30	5,170	5,680	6,080	6,305	7,610	8,520	40	9,655	10,620
32	5,315	5,840	6,250	6,480	7,825	8,760	42	9,930	10,920

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
18.4-38	427877	TT	8	20	5,360	W15L, W16A, DD16	18.9	69.7	32.3	207	52	45	875

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12	3,605	3,960	4,235	4,395	5,305	5,940	16	6,730	7,405
14	4,005	4,400	4,710	4,885	5,895	6,600	18	7,480	8,230
16	4,260	4,680	5,010	5,195	6,270	7,020	20	7,955	8,750
18	4,625	5,080	5,435	5,640	6,805	7,620	24	8,635	9,500
20	4,880	5,360	5,735	5,950	7,180	8,040	26	9,110	10,025

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
20.8-34	427801	TT	8	18	5,840	W18L	21.3	68.6	31.0	204	53	--	825

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12	4,130	4,540	4,860	5,040	6,085	6,810	16	7,720	8,490
14	4,495	4,940	5,285	5,485	6,620	7,410	18	8,400	9,240
16	4,880	5,360	5,735	5,950	7,180	8,040	20	9,110	10,025
18	5,315	5,840	6,250	6,480	7,825	8,760	24	9,930	10,920

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
20.8-38	427889	TT	8	18	6,150	W18A, DW18A, DD18	21.1	72.3	32.8	215	53	46	875
20.8-38	42D389	TL	14	32	8,550	W18A, DW18A, DD18	21.1	72.3	32.8	215	53	46	875

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12	4,370	4,800	5,135	5,330	6,430	7,200	16	8,160	8,975
14	4,880	5,360	5,735	5,950	7,180	8,040	18	9,110	10,025
16	5,170	5,680	6,080	6,305	7,610	8,520	20	9,655	10,620
18	5,595	6,150	6,580	6,825	8,240	9,225	24	10,455	11,500
END OF 427889									
20	6,005	6,600	7,060	7,325	8,845	9,900	26	11,220	12,340
22	6,325	6,950	7,435	7,715	9,315	10,425	28	11,815	12,995
24	6,505	7,150	7,650	7,935	9,580	10,725	32	12,155	13,370
26	6,915	7,600	8,130	8,435	10,185	11,400	34	12,920	14,210
28	7,145	7,850	8,400	8,715	10,520	11,775	36	13,345	14,680
30	7,510	8,250	8,830	9,160	11,055	12,375	40	14,025	15,430
32	7,780	8,550	9,150	9,490	11,455	12,825	42	14,535	15,990



DYNA TORQUE II

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
24.5-32	42D199	TL	12	24	8,800	DW20B, DW21B, DH21, DH21B, DH21H, DH21HB	25.3	71.8	32.4	213	55	45	875

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12	5,315	5,840	6,250	6,480	7,825	8,760	16	9,930	10,920
14	5,825	6,400	6,850	7,105	8,575	9,600	18	10,880	11,970
16	6,190	6,800	7,275	7,550	9,110	10,200	20	11,560	12,715
18	6,735	7,400	7,920	8,215	9,915	11,100	24	12,580	13,840
20	7,145	7,850	8,400	8,715	10,520	11,775	26	13,345	14,680
22	7,510	8,250	8,830	9,160	11,055	12,375	28	14,025	15,430
24	8,010	8,800	9,415	9,770	11,790	13,200	32	14,960	16,455

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
28L-26	42D198	TL	12	20	7,400	DW25B	29.1	65.7	30.0	195	58	43	750

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12	5,025	5,520	5,905	6,125	7,395	8,280	16	9,385	10,320
14	5,460	6,000	6,420	6,660	8,040	9,000	18	10,200	11,220
16	6,005	6,600	7,060	7,325	8,845	9,900	20	11,220	12,340
18	6,325	6,950	7,435	7,715	9,315	10,425	24	11,815	12,995
20	6,735	7,400	7,920	8,215	9,915	11,100	26	12,580	13,840

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
30.5L-32	42D196	TL	12	20	9,350	DW27B, DH27, DH27B, DH27H, DH27HB	31.1	71.4	32.3	212	56	--	875
30.5L-32	42D596	TL	16	26	11,000	DH27, DH27B, DH27H, DH27HB	31.1	71.4	32.3	212	56	--	875

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12	6,325	6,950	7,435	7,715	9,315	10,425	16	11,815	12,995
14	6,915	7,600	8,130	8,435	10,185	11,400	18	12,920	14,210
16	7,510	8,250	8,830	9,160	11,055	12,375	20	14,025	15,430
18	8,010	8,800	9,415	9,770	11,790	13,200	24	14,960	16,455
20	8,510	9,350	10,005	10,380	12,530	14,025	26	15,895	17,485
END OF 42D196									
22	9,010	9,900	10,595	10,990	13,265	14,850	28	16,830	18,515
24	9,555	10,500	11,235	11,655	14,070	15,750	32	17,850	19,635
26	10,010	11,000	11,770	12,210	14,740	16,500	34	18,700	20,570





GOODYEAR DT730 R-1

- Smooth riding rear farm tire
- Patented tread design of interlocking center lugs reduces ride disturbance
- Provides unmatched performance in dry land conditions where R-1 tires are recommended
- Better traction, improved ride, longer wear and less fuel consumption than any bias ply tire



Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
290/95R34	4T7405	TL	131A8/B	35	4,300	W10	11.1	55.4	25.4	167	37	41	675

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
						Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	1,450	1,550	1,610	1,945	2,175	12	2,465
9	2,040	2,185	2,265	2,735	3,060	15	3,470
12	2,340	2,505	2,595	3,135	3,510	17	3,980
17	3,000	3,210	3,330	4,020	4,500	23	5,100
23	3,640	3,895	4,040	4,880	5,460	29	6,190
29	4,080	4,365	4,530	5,465	6,120	36	6,935
32	4,180	4,475	4,640	5,600	6,270	41	7,105
35	4,300	4,600	4,775	5,760	6,450	44	7,310

DT730:
DURA TORQUE



GOODYEAR DURA TORQUE R-1

- Excellent roadability provided by the overlapping center lugs
- Traction in a wide range of sizes due to its long bar design
- Long wear and durability from its braced lug design
- Easy lug cleanability



Tire Size	Catalog #	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
6-14	4DQ66J	TL	6	74A6	42	825	5, 5KB, 5JA	5.9	25.1	11.7	75	29	--	330

Inflation Pressure (psi)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
12	370	410	440	535	575
16	430	480	515	625	670
20	495	550	590	715	770
24	540	600	640	780	840
28	595	660	705	860	925
32	645	715	765	930	1,000
36	685	760	815	990	1,065
42	745	825	885	1,075	1,155

BIAS & RADIAL R-1, R-1W



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
7-16	4DQ666	TL	6	36	1,100	6.00F, 6L, 6LB	7.1	29.5	13.9	89	32	--	350

Inflation Pressure (psi)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
12	525	585	625	760	820
16	610	675	720	880	945
20	705	785	840	1,020	1,100
24	770	855	915	1,110	1,195
28	840	935	1,000	1,215	1,310
32	920	1,020	1,090	1,325	1,430
34	945	1,050	1,125	1,365	1,470
36	990	1,100	1,175	1,430	1,540

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
8.3-24	4DQ684	TL	6	34	1,610	W7	8.2	39.9	18.7	121	35	34	475

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12	800	880	940	975	1,180	1,320	16	1,495	1,645
16	930	1,020	1,090	1,130	1,365	1,530	20	1,735	1,905
20	1,065	1,170	1,250	1,300	1,570	1,755	26	1,990	2,190
24	1,200	1,320	1,410	1,465	1,770	1,980	32	2,245	2,470
28	1,300	1,430	1,530	1,585	1,915	2,145	36	2,430	2,675
30	1,345	1,480	1,585	1,645	1,985	2,220	40	2,515	2,770
32	1,430	1,570	1,680	1,745	2,105	2,355	42	2,670	2,935
34	1,465	1,610	1,725	1,785	2,155	2,415	44	2,735	3,010

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
9.5-16	4DQ695	TL	6	30	1,390	W8L, 8LB	9.6	33.4	15.4	100	36	31	400

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12	750	825	885	915	1,105	1,240	16	1,405	1,545
16	880	965	1,035	1,070	1,295	1,450	20	1,640	1,805
20	1,000	1,100	1,175	1,220	1,475	1,650	26	1,870	2,055
22	1,065	1,170	1,250	1,300	1,570	1,755	28	1,990	2,190
24	1,120	1,230	1,315	1,365	1,650	1,845	32	2,090	2,300
26	1,165	1,280	1,370	1,420	1,715	1,920	34	2,175	2,395
28	1,240	1,360	1,455	1,510	1,820	2,040	36	2,310	2,545
30	1,265	1,390	1,485	1,545	1,865	2,085	40	2,365	2,600

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
9.5-24	4DQ694	TL	6	30	1,870	W7, W8, W8H	9.6	41.5	19.2	124	36	35	500

See Next Page for the Load & Inflation Table



4DQ694 LOAD & INFLATION TABLE									
Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12	1,000	1,100	1,175	1,220	1,475	1,650	16	1,870	2,055
16	1,165	1,280	1,370	1,420	1,715	1,920	20	2,175	2,395
20	1,345	1,480	1,585	1,645	1,985	2,220	26	2,515	2,770
22	1,430	1,570	1,680	1,745	2,105	2,355	28	2,670	2,935
24	1,500	1,650	1,765	1,830	2,210	2,475	32	2,805	3,085
26	1,555	1,710	1,830	1,900	2,290	2,565	34	2,905	3,200
28	1,655	1,820	1,945	2,020	2,440	2,730	36	3,095	3,405
30	1,700	1,870	2,000	2,075	2,505	2,805	40	3,180	3,495

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
11.2-24	4DQ604	TL	6	26	2,090	W9, W10, W10H, W10L, DW10	11.5	44.4	20.8	134	38	36	525

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12	1,200	1,320	1,410	1,465	1,770	1,980	16	2,245	2,470
14	1,300	1,430	1,530	1,585	1,915	2,145	18	2,430	2,675
16	1,430	1,570	1,680	1,745	2,105	2,355	20	2,670	2,935
18	1,500	1,650	1,765	1,830	2,210	2,475	24	2,805	3,085
20	1,600	1,760	1,885	1,955	2,360	2,640	26	2,990	3,290
22	1,700	1,870	2,000	2,075	2,505	2,805	28	3,180	3,495
24	1,800	1,980	2,120	2,200	2,655	2,970	32	3,365	3,705
26	1,900	2,090	2,235	2,320	2,800	3,135	34	3,555	3,910

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
12.4-24	4DQ814	TL	8	32	2,830	W9, W10, W10H, W10L, DW10, W11, DW11	12.4	46.2	21.6	14	40	37	550

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12	1,430	1,570	1,680	1,745	2,105	2,355	16	2,670	2,935
16	1,700	1,870	2,000	2,075	2,505	2,805	20	3,180	3,495
20	1,955	2,150	2,300	2,385	2,880	3,225	26	3,655	4,020
24	2,185	2,400	2,570	2,665	3,215	3,600	32	4,080	4,490
26	2,250	2,470	2,645	2,740	3,310	3,705	34	4,200	4,620
28	2,365	2,600	2,780	2,885	3,485	3,900	36	4,420	4,860
30	2,440	2,680	2,870	2,975	3,590	4,020	40	4,555	5,010
32	2,575	2,830	3,030	3,140	3,790	4,245	42	4,810	5,290

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
12.4-28	4DQ812	TL	8	32	3,000	W9, W10, W10H, W10L, DW10, W11, DW11	12.4	50.3	23.5	151	40	--	600

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12	1,555	1,710	1,830	1,900	2,290	2,565	16	2,905	3,200
16	1,800	1,980	2,120	2,200	2,655	2,970	20	3,365	3,705
20	2,065	2,270	2,430	2,520	3,040	3,405	26	3,860	4,245
22	2,185	2,400	2,570	2,665	3,215	3,600	28	4,080	4,490
26	2,440	2,680	2,870	2,975	3,590	4,020	34	4,555	5,010
28	2,510	2,760	2,955	3,065	3,700	4,140	36	4,690	5,160
30	2,650	2,910	3,115	3,230	3,900	4,365	40	4,945	5,440
32	2,730	3,000	3,210	3,330	4,020	4,500	42	5,100	5,610



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
13.6-28	4DQ624	TL	6	22	2,830	W10, W10L, DW10, W11, DW11, W12, DW12	13.7	51.1	23.4	152	42	39	625

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12	1,800	1,980	2,120	2,200	2,655	2,970	16	3,365	3,705
14	2,000	2,200	2,355	2,440	2,950	3,300	18	3,740	4,115
16	2,130	2,340	2,505	2,595	3,135	3,510	20	3,980	4,375
18	2,310	2,540	2,720	2,820	3,405	3,810	24	4,320	4,750
20	2,440	2,680	2,870	2,975	3,590	4,020	26	4,555	5,010
22	2,575	2,830	3,030	3,140	3,790	4,245	28	4,810	5,290

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
14.9-24	4DQ834	TL	8	26	3,520	W11, DW11, W12, DW12, W13, DW13, DW13L	14.9	49.7	22.7	148	44	39	600

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12	2,000	2,200	2,355	2,440	2,950	3,300	16	3,740	4,115
14	2,185	2,400	2,570	2,665	3,215	3,600	18	4,080	4,490
16	2,365	2,600	2,780	2,885	3,485	3,900	20	4,420	4,860
18	2,575	2,830	3,030	3,140	3,790	4,245	24	4,810	5,290
20	2,730	3,000	3,210	3,330	4,020	4,500	26	5,100	5,610
22	2,910	3,200	3,425	3,550	4,290	4,800	28	5,440	5,985
24	3,005	3,300	3,530	3,665	4,420	4,950	32	5,610	6,170
26	3,205	3,520	3,765	3,905	4,715	5,280	34	5,985	6,580

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
16.9-24	4DQ645	TL	6	18	3,420	W14L, DW14L, W15L, DW15L	17.6	53.5	24.5	159	50	--	625

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12	2,440	2,680	2,870	2,975	3,590	4,020	16	4,555	5,010
14	2,650	2,910	3,115	3,230	3,900	4,365	18	4,945	5,440
16	2,910	3,200	3,425	3,550	4,290	4,800	20	5,440	5,985
18	3,110	3,420	3,660	3,795	4,585	5,130	24	5,815	6,395

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
16.9-28	4DQ648	TL	6	18	3,640	W14L, DW14L, W15L, DW15L	18.2	57.0	26.3	170	50	41	675

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12	2,650	2,910	3,115	3,230	3,900	4,365	16	4,945	5,440
14	2,910	3,200	3,425	3,550	4,290	4,800	18	5,440	5,985
16	3,110	3,420	3,660	3,795	4,585	5,130	20	5,815	6,395
18	3,310	3,640	3,895	4,040	4,880	5,460	24	6,190	6,805




Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
16.9-30	4DQ679	TL	6	18	3,740	W14L, DW14A, DW14L, W15L, DW15A, DW15L	17.7	58.6	27.1	176	50	42	700
							Cyclic Service						
Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Inflation Pressure (psi)		10 mph (lbs)	6 mph (lbs)			
12	2,730	3,000	3,210	3,330	4,020	4,500	16		5,100	5,610			
14	3,005	3,300	3,530	3,665	4,420	4,950	18		5,610	6,170			
16	3,205	3,520	3,765	3,905	4,715	5,280	20		5,985	6,580			
18	3,405	3,740	4,000	4,150	5,010	5,610	24		6,360	6,995			

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
18.4-30	4DQ850	TL	8	20	4,800	W15L, DW15A, DW16A	19.2	62.3	28.3	185	52	--	750
							Cyclic Service						
Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Inflation Pressure (psi)		10 mph (lbs)	6 mph (lbs)			
12	3,205	3,520	3,765	3,905	4,715	5,280	16		5,985	6,580			
14	3,515	3,860	4,130	4,285	5,170	5,790	18		6,560	7,220			
16	3,805	4,180	4,475	4,640	5,600	6,270	20		7,105	7,815			
18	4,130	4,540	4,860	5,040	6,085	6,810	24		7,720	8,490			
20	4,370	4,800	5,135	5,330	6,430	7,200	26		8,160	8,975			

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
18.4-34	47Q854	TT	8	20	5,080	W15L, DW15A, W16L, DW16A	18.8	65.1	29.6	194	52	44	800
							Cyclic Service						
Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Inflation Pressure (psi)		10 mph (lbs)	6 mph (lbs)			
12	3,405	3,740	4,000	4,150	5,010	5,610	16		6,360	6,995			
14	3,805	4,180	4,475	4,640	5,600	6,270	18		7,105	7,815			
16	4,005	4,400	4,710	4,885	5,895	6,600	20		7,480	8,230			
18	4,370	4,800	5,135	5,330	6,430	7,200	24		8,160	8,975			
20	4,625	5,080	5,435	5,640	6,805	7,620	26		8,635	9,500			

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
18.4-38	47Q877	TT	8	20	5,360	W15L, W16A, DD16	18.8	69.1	32.1	205	52	45	875
							Cyclic Service						
Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Inflation Pressure (psi)		10 mph (lbs)	6 mph (lbs)			
12	3,605	3,960	4,235	4,395	5,305	5,940	16		6,730	7,405			
14	4,005	4,400	4,710	4,885	5,895	6,600	18		7,480	8,230			
16	4,260	4,680	5,010	5,195	6,270	7,020	20		7,955	8,750			
18	4,625	5,080	5,435	5,640	6,805	7,620	24		8,635	9,500			
20	4,880	5,360	5,735	5,950	7,180	8,040	26		9,110	10,025			





GOODYEAR POWER TORQUE R-1

- Established tread design for tough service



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
7.2-16	42P833	TL	8	52	1,230	6.00F, 6L, 6LB	7.2	28.7	13.5	87	31	--	360
Inflation Pressure (psi)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service			Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)		
26	825	885	915	1,105	1,240	34	1,405	1,545					
30	880	940	975	1,180	1,320	40	1,495	1,645					
34	965	1,035	1,070	1,295	1,450	44	1,640	1,805					
38	1,020	1,090	1,130	1,365	1,530	50	1,735	1,905					
42	1,070	1,145	1,190	1,435	1,605	54	1,820	2,000					
46	1,140	1,220	1,265	1,530	1,710	60	1,940	2,130					
48	1,170	1,250	1,300	1,570	1,755	62	1,990	2,190					
52	1,230	1,315	1,365	1,650	1,845	68	2,090	2,300					

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI	
8.3-16	42P651	TL	6	34	1,200	W7	8.4	31.5	N/A	N/A	34	30	390	
Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service			Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)		
16	690	760	815	845	1,020	1,140	20	1,290	1,420					
20	800	880	940	975	1,180	1,320	26	1,495	1,645					
22	850	935	1,000	1,040	1,255	1,405	28	1,590	1,750					
24	880	965	1,035	1,070	1,295	1,450	32	1,640	1,805					
26	930	1,020	1,090	1,130	1,365	1,530	34	1,735	1,905					
28	975	1,070	1,145	1,190	1,435	1,605	36	1,820	2,000					
30	1,000	1,100	1,175	1,220	1,475	1,650	40	1,870	2,055					
34	1,090	1,200	1,285	1,330	1,610	1,800	44	2,040	2,245					



GOODYEAR DT930 R-1W

- Lug angle provides great traction and clean out
- Great flotation and a smooth ride
- Rugged carcass design for durability
- Wide base and wider section width allow for higher loads
- Time tested, LSW proven performance on a variety of equipment



Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
LSW1100/45R46	G8MB16	TL	181D	17	18,200	DW38HB	39.5	83.7	36.8	250	77	49	1,025
Inflation Pressure (psi)		43 mph (lbs)		40 mph (lbs)		20 mph (lbs)		10 mph (lbs)					
12		13,015		14,300		15,990		19,065					
15		15,015		16,500		18,070		21,545					
17		16,560		18,200		20,410		24,335					



GOODYEAR SUPER TRACTION RADIAL R-1W

- Self-cleaning tread action promoted by 45-degree tread lug angles
- Up to 25% deeper tread than conventional R-1 tires
- For applications in heavy, wet soil conditions



Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
250/95R34	4T04KF	TL	119A8/B	23	3,000	W8	9.9	53.1	24.4	160	55	40	650
Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service							
						Inflation Pressure (psi)	6 mph (lbs)						
6 (Duals)	1,195	1,280	1,325	1,600	1,795	12	2,030						
9	1,610	1,725	1,785	2,155	2,415	15	2,735						
12	1,870	2,000	2,075	2,505	2,805	17	3,180						
15	2,150	2,300	2,385	2,880	3,225	20	3,655						
17	2,400	2,570	2,665	3,215	3,600	23	4,080						
20	2,680	2,870	2,975	3,590	4,020	26	4,555						
23	3,000	3,210	3,330	4,020	4,500	29	5,100						

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
290/90R38	4T07V1	TL	138A8/B	46	5,200	W10	11.4	58.9	27.2	177	57	42	725
Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service							
						Inflation Pressure (psi)	6 mph (lbs)						
29	4,080	4,365	4,530	5,465	6,120	36	6,935						
32	4,180	4,475	4,640	5,600	6,270	41	7,105						
35	4,400	4,710	4,885	5,895	6,600	44	7,480						
38	4,540	4,860	5,040	6,085	6,810	48	7,720						
41	4,800	5,135	5,330	6,430	7,200	51	8,160						
44	4,940	5,285	5,485	6,620	7,410	55	8,400						
46	5,200	5,565	5,770	6,970	7,800	58	8,840						

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
320/85R34	4T04HL	TL	133A8/B	35	4,540	W9, W10, DW10, W11, DW11	12.1	56.4	26.1	172	57	41	675
Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service							
						Inflation Pressure (psi)	6 mph (lbs)						
6 (Duals)	1,550	1,660	1,720	2,075	2,325	12	2,635						
9	2,150	2,300	2,385	2,880	3,225	15	3,655						
12	2,470	2,645	2,740	3,310	3,705	17	4,200						
17	3,200	3,425	3,550	4,290	4,800	23	5,440						
23	3,860	4,130	4,285	5,170	5,790	29	6,560						
29	4,300	4,600	4,775	5,760	6,450	36	7,310						
32	4,400	4,710	4,885	5,895	6,600	41	7,480						
35	4,540	4,860	5,040	6,085	6,810	44	7,720						





SUPER TRACTION RADIAL

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
320/85R38	4T0545	TL	143A8/B	52	6,000	W9, W10, W10A, DW10, DW10A, W11, DW11, DW11A	12.0	59.1	27.7	181	57	42	725
						Cyclic Service							
Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)			Inflation Pressure (psi)	6 mph (lbs)				
23	4,080	4,365	4,530	5,465	6,120			29	6,935				
29	4,540	4,860	5,040	6,085	6,810			36	7,720				
35	4,800	5,135	5,330	6,430	7,200			44	8,160				
41	5,200	5,565	5,770	6,970	7,800			51	8,840				
46	5,680	6,080	6,305	7,610	8,520			58	9,655				
52	6,000	6,420	6,660	8,040	9,000			64	10,200				

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
380/90R54	4T07V9	TL	152A8/B	35	7,850	W12A, W12B	14.3	80.9	37.7	247	61	48	1,025
						Cyclic Service							
Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)			Inflation Pressure (psi)	6 mph (lbs)				
6 (Duals)	2,640	2,825	2,930	3,540	3,960			12	4,490				
9	3,640	3,895	4,040	4,880	5,460			15	6,190				
12	4,300	4,600	4,775	5,760	6,450			17	7,310				
17	5,520	5,905	6,125	7,395	8,280			23	9,385				
23	6,600	7,060	7,325	8,845	9,900			29	11,220				
29	7,400	7,920	8,215	9,915	11,100			36	12,580				
32	7,600	8,130	8,435	10,185	11,400			41	12,920				
35	7,850	8,400	8,715	10,520	11,775			44	13,345				

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
28LR26	4TR698	TL	169A8/B	42	12,800	DW25B	27.8	63.5	28.6	191	78	--	750
						Cyclic Service							
Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)			Inflation Pressure (psi)	6 mph (lbs)				
12	6,150	6,580	6,825	8,240	9,225			17	10,455				
18	7,850	8,400	8,715	10,520	11,775			24	13,345				
22	8,800	9,415	9,770	11,790	13,200			28	14,960				
26	9,650	10,325	10,710	12,930	14,475			33	16,405				
30	10,500	11,235	11,655	14,070	15,750			38	17,850				
34	11,400	12,200	12,655	15,275	17,100			42	19,380				
38	12,000	12,840	13,320	16,080	18,000			48	20,400				
42	12,800	13,695	14,210	17,150	19,200			52	21,760				



GOODYEAR OPTITRAC R-1W

Key Benefits

- Latest generation compound and construction technology
- High flex carcass technology operates at up to 40% less inflation
- Optimized tire and footprint shape for minimal soil compaction
- Continuous helical lug curvature for enhanced ride comfort
- Tuned asymmetric lug shape which improves traction and stability
- Premium tread depth for a long tire life and enhanced soil traction
- Modern sophisticated appearance with a distinctive look and decoration
- Extreme Flotation design to eliminate pinch row compaction and rutting



Application(s)





OPTITRAC



LSW OPTIONS



FUEL ECONOMY



INCREASED TRACTION



IMPROVED PROFITABILITY



TIME SAVING



LOW SOIL COMPACTION



INCREASED PUNCTURE RESISTANCE

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
280/70R18	D123EF	TL	114A8/B	35	2,600	W8, W9, W10, W10H	11.0	33.4	15.1	101	40	31	400
Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service							
6 (Duals)	800	895	950	1,055	1,265	Inflation Pressure (psi)		6 mph (lbs)					
9	1,070	1,200	1,275	1,410	1,690	12		1,360					
12	1,280	1,435	1,525	1,690	2,020	15		1,820					
17	1,610	1,805	1,915	2,125	2,545	17		2,175					
23	1,980	2,220	2,355	2,615	3,130	23		2,735					
29	2,340	2,620	2,785	3,090	3,695	29		3,365					
32	2,540	2,845	3,025	3,355	4,015	36		3,980					
35	2,600	2,910	3,095	3,430	4,110	41		4,320					
						44		4,420					

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI	
320/85R20	40P2RT	TL	119D	23	3,000	W9, W10, W10H, W11	12.8	41.5	18.7	125	51	--	500	
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service					
6 (Duals)	1,115	1,225	1,285	1,340	1,410	1,450	1,640	1,840	Inflation Pressure (psi)		6 mph (lbs)			
9	1,500	1,650	1,735	1,805	1,895	1,955	2,210	2,475	12		2,085			
12	1,755	1,930	2,025	2,115	2,220	2,285	2,585	2,895	15		2,805			
15	2,000	2,200	2,310	2,410	2,530	2,605	2,950	3,300	17		3,280			
17	2,250	2,470	2,595	2,705	2,840	2,925	3,310	3,705	20		3,740			
20	2,510	2,760	2,900	3,020	3,175	3,270	3,700	4,140	23		4,200			
23	2,730	3,000	3,150	3,285	3,450	3,555	4,020	4,500	26		4,690			
									29		5,100			

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI	
LSW320/70R24	G0P3RT	TL	120D	29	3,080	W10	12.0	41.7	19.1	127	51	--	500	
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service					
6 (Duals)	1,025	1,125	1,180	1,230	1,295	1,335	1,510	1,690	Inflation Pressure (psi)		6 mph (lbs)			
9	1,385	1,520	1,595	1,665	1,750	1,800	2,035	2,280	12		1,915			
12	1,600	1,760	1,850	1,925	2,025	2,085	2,360	2,640	15		2,585			
15	1,855	2,040	2,140	2,235	2,345	2,415	2,735	3,060	17		2,990			
17	2,065	2,277	2,385	2,485	2,610	2,690	3,040	3,405	20		3,470			
20	2,310	2,540	2,665	2,780	2,920	3,010	3,405	3,810	23		3,860			
23	2,510	2,760	2,900	3,020	3,175	3,270	3,700	4,140	26		4,320			
29	2,805	3,080	3,235	3,375	3,540	3,650	4,125	4,620	29		4,690			
									36		5,235			

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
IF320/80R42	F0P7V2	TL	150D	52	7,400	W10, W10A, W11	11.9	62.2	28.8	190	50	43	775

See Next Page for the Load & Inflation Table



LSW OPTIONS



FUEL ECONOMY



INCREASED TRACTION



IMPROVED PROFITABILITY



TIME SAVING



LOW SOIL COMPACTION



INCREASED PUNCTURE RESISTANCE

Inflation Pressure (psi)	43 mph (lbs)	Duals (lbs)	40 mph (lbs)	Duals (lbs)
12	2,560	2,255	2,815	2,475
17	3,715	3,270	4,080	3,590
23	4,495	3,955	4,940	4,345
29	5,025	4,420	5,520	4,860
35	5,315	4,675	5,840	5,140
41	5,825	5,125	6,400	5,630
46	6,325	5,565	6,950	6,115
52	6,735	5,925	7,400	6,510

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim				Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
320/85R24	40P214	TL	122D	23	3,300	W9, W10, W10H, DW10, W11, DW11				13.0	45.3	20.4	137	48	37	550

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	1,185	1,300	1,365	1,425	1,495	1,540	1,740	1,950	12	2,210
9	1,655	1,820	1,910	1,995	2,095	2,155	2,440	2,730	15	3,095
12	1,900	2,090	2,195	2,290	2,405	2,475	2,800	3,135	17	3,555
15	2,185	2,400	2,520	2,630	2,760	2,845	3,215	3,600	20	4,080
17	2,440	2,680	2,815	2,935	3,080	3,175	3,590	4,020	23	4,555
20	2,730	3,000	3,150	3,285	3,450	3,555	4,020	4,500	26	5,100
23	3,005	3,300	3,465	3,615	3,795	3,910	4,420	4,950	29	5,610

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim				Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
320/90R42	40P7JM	TL	147D	52	6,800	W9, W10, W10A, W11				12.6	65.0	30.4	199	52	44	800

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	1,980	2,175	2,285	2,380	2,500	2,575	2,915	3,265	15	3,700
17	3,405	3,740	3,925	4,095	4,300	4,430	5,010	5,610	23	6,360
23	4,130	4,540	4,765	4,970	5,220	5,380	6,085	6,810	29	7,720
29	4,495	4,940	5,185	5,410	5,680	5,855	6,620	7,410	36	8,400
35	4,880	5,360	5,630	5,870	6,165	6,350	7,180	8,040	44	9,110
41	5,315	5,840	6,130	6,395	6,715	6,920	7,825	8,760	51	9,930
46	5,825	6,400	6,720	7,010	7,360	7,585	8,575	9,600	58	10,880
52	6,190	6,800	7,140	7,445	7,820	8,060	9,110	10,200	64	11,560

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim				Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
VF320/90R42	VOP3JM	TL	148D	29	6,950	W10, W10A, W11				12.2	64.7	29.5	196	52	44	800

Inflation Pressure (psi)	43 mph (lbs)	Duals (lbs)	40 mph (lbs)	Duals (lbs)
6 (Duals)	2,330	2,330	2,560	2,560
9	3,205	2,820	3,520	3,100
12	3,715	3,270	4,080	3,590
17	4,730	4,160	5,200	4,575
23	5,825	5,125	6,400	5,630
29	6,325	5,565	6,950	6,115



OPTITRAC



LSW OPTIONS



FUEL ECONOMY



INCREASED TRACTION



IMPROVED PROFITABILITY



TIME SAVING



LOW SOIL COMPACTION



INCREASED PUNCTURE RESISTANCE

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
320/90R46	40P4T5	TL	156D	70	8,800	W9, W10, W10A, DW10A, W11	12.4	69.1	32.4	212	52	45	875

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
29	4,730	5,200	5,460	5,695	5,980	6,160	6,970	7,800	36	8,840
35	5,025	5,520	5,795	6,045	6,350	6,540	7,395	8,280	44	9,385
41	5,595	6,150	6,460	6,735	7,070	7,290	8,240	9,225	51	10,455
46	6,005	6,600	6,930	7,225	7,590	7,820	8,845	9,900	58	11,220
52	6,325	6,950	7,300	7,610	7,990	8,235	9,315	10,425	64	11,815
58	6,735	7,400	7,770	8,105	8,510	8,770	9,915	11,100	70	12,580
64	7,325	8,050	8,455	8,815	9,260	9,540	10,785	12,075	75	13,685
70	8,010	8,800	9,240	9,635	10,120	10,430	11,790	13,200	81	14,960

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
320/90R50	40P6V6	TL	148D	46	6,950	W9, W10, W10A, DW10A, W11	12.2	73.4	34.5	225	52	46	925

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	1,820	2,000	2,100	2,190	2,300	2,370	2,680	3,000	12	3,400
12	2,910	3,200	3,360	3,505	3,680	3,790	4,290	4,800	17	5,440
17	3,715	4,080	4,285	4,470	4,690	4,835	5,465	6,120	23	6,935
23	4,495	4,940	5,185	5,410	5,680	5,855	6,620	7,410	29	8,400
29	5,025	5,520	5,795	6,045	6,350	6,540	7,395	8,280	36	9,385
35	5,315	5,840	6,130	6,395	6,715	6,920	7,825	8,760	44	9,930
41	5,825	6,400	6,720	7,010	7,360	7,585	8,575	9,600	51	10,880
46	6,325	6,950	7,300	7,610	7,990	8,235	9,315	10,425	58	11,815

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
320/90R54	40P6V5	TL	149D	46	7,150	W10A	N/A	N/A	N/A	N/A	52	47	975

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	1,875	2,060	2,165	2,255	2,370	2,440	2,760	3,090	12	3,500
12	3,005	3,300	3,465	3,615	3,795	3,910	4,420	4,950	17	5,610
17	3,915	4,300	4,515	4,710	4,945	5,095	5,760	6,450	23	7,310
23	4,730	5,200	5,460	5,695	5,980	6,160	6,970	7,800	29	8,840
29	5,170	5,680	5,965	6,220	6,530	6,730	7,610	8,520	36	9,655
35	5,460	6,000	6,300	6,570	6,900	7,110	8,040	9,000	44	10,200
41	6,005	6,600	6,930	7,225	7,590	7,820	8,845	9,900	51	11,220
46	6,505	7,150	7,510	7,830	8,225	8,475	9,580	10,725	58	12,155

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
320/105R54	40P6MN	TL	166D	75	11,700	W10A	12.8	81.0	37.9	248	55	48	1,025

See Next Page for the Load & Inflation Table



LSW OPTIONS



FUEL ECONOMY



INCREASED TRACTION



IMPROVED PROFITABILITY



TIME SAVING



LOW SOIL COMPACTION



INCREASED PUNCTURE RESISTANCE



40P6MN LOAD & INFLATION TABLE											Cyclic Service	
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)			Inflation Pressure (psi)	6 mph (lbs)
35	5,565	6,115	6,420	6,695	7,030	7,245	8,195	9,175			44	10,395
38	6,505	7,150	7,510	7,830	8,225	8,475	9,580	10,725			48	12,155
44	7,145	7,850	8,245	8,595	9,030	9,300	10,520	11,775			55	13,345
49	7,510	8,250	8,665	9,035	9,490	9,775	11,055	12,375			61	14,025
55	8,010	8,800	9,240	9,635	10,120	10,430	11,790	13,200			67	14,960
61	8,780	9,650	10,135	10,565	11,100	11,435	12,930	14,475			73	16,405
67	9,280	10,200	10,710	11,170	11,730	12,085	13,670	15,300			78	17,340
75	10,645	11,700	12,285	12,810	13,455	13,865	15,680	17,550			87	19,890

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
320/125R54	4T04UT	TL	155A8/B	41	8,550	W10A	13.5	83.8	38.9	256	58	49	1,075

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
						Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	2,710	2,900	3,010	3,630	4,065	12	4,605
12	4,300	4,600	4,775	5,760	6,450	17	7,310
17	5,520	5,905	6,125	7,395	8,280	23	9,385
23	6,800	7,275	7,550	9,110	10,200	29	11,560
29	7,400	7,920	8,215	9,915	11,100	36	12,580
35	7,850	8,400	8,715	10,520	11,775	44	13,345
38	8,250	8,830	9,160	11,055	12,375	48	14,025
41	8,550	9,150	9,490	11,455	12,825	51	14,535

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
340/85R24	40P422	TL	130D	35	4,180	W11, W12	13.7	46.5	21.6	142	49	--	575

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	1,320	1,450	1,525	1,590	1,665	1,720	1,945	2,175	12	2,465
9	1,800	1,980	2,080	2,170	2,275	2,345	2,655	2,970	15	3,365
12	2,065	2,270	2,385	2,485	2,610	2,690	3,040	3,405	17	3,860
17	2,730	3,000	3,150	3,285	3,450	3,555	4,020	4,500	23	5,100
23	3,310	3,640	3,820	3,985	4,185	4,315	4,880	5,460	29	6,190
29	3,605	3,960	4,160	4,335	4,555	4,695	5,305	5,940	36	6,730
32	3,715	4,080	4,285	4,470	4,690	4,835	5,465	6,120	41	6,935
35	3,805	4,180	4,390	4,575	4,805	4,955	5,600	6,270	44	7,105

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
380/70R24	40P285	TL	125D	23	3,640	W11, W12, W13	15.6	47.1	21.4	143	51	--	575

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	1,320	1,450	1,525	1,590	1,665	1,720	1,945	2,175	12	2,465
9	1,800	1,980	2,080	2,170	2,275	2,345	2,655	2,970	15	3,365
12	2,065	2,270	2,385	2,485	2,610	2,690	3,040	3,405	17	3,860
15	2,365	2,600	2,730	2,845	2,990	3,080	3,485	3,900	20	4,420
17	2,730	3,000	3,150	3,285	3,450	3,555	4,020	4,500	23	5,100
20	3,005	3,300	3,465	3,615	3,795	3,910	4,420	4,950	26	5,610
23	3,310	3,640	3,820	3,985	4,185	4,315	4,880	5,460	29	6,190



OPTITRAC



LSW OPTIONS



FUEL ECONOMY



INCREASED TRACTION



IMPROVED PROFITABILITY



TIME SAVING



LOW SOIL COMPACTION



INCREASED PUNCTURE RESISTANCE

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
380/80R38	40P4M3	TL	142D	35	5,840	W11, W12, DW12A, W13	14.7	62.3	28.8	190	58	43	750
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service				
6 (Duals)	1,820	2,000	2,100	2,190	2,300	2,370	2,680	3,000	Inflation Pressure (psi)	6 mph (lbs)			
9	2,510	2,760	2,900	3,020	3,175	3,270	3,700	4,140	12	3,400			
12	2,...910	3,200	3,360	3,505	3,680	3,790	4,290	4,800	15	4,690			
17	3,805	4,180	4,390	4,575	4,805	4,955	5,600	6,270	17	5,440			
23	4,625	5,080	5,335	5,565	5,840	6,020	6,805	7,620	23	7,105			
29	5,025	5,520	5,795	6,045	6,350	6,540	7,395	8,280	29	8,635			
32	5,170	5,680	5,965	6,220	6,530	6,730	7,610	8,520	36	9,385			
35	5,315	5,840	6,130	6,395	6,715	6,920	7,825	8,760	41	9,655			
									44	9,930			

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
IF380/80R38	F0P4M3	TL	149D	35	7,150	W12, DW12, DW12A, W13	14.9	62.0	28.3	188	58	43	750
Inflation Pressure (psi)	43 mph (lbs)	Duals (lbs)	40 mph (lbs)	Duals (lbs)									
6 (Duals)	--	2,210	--	2,430									
9	3,005	2,645	3,300	2,905									
12	3,515	3,095	3,860	3,395									
17	4,495	3,955	4,940	4,345									
23	5,460	4,805	6,000	5,280									
29	6,005	5,285	6,600	5,810									
32	6,325	5,565	6,950	6,115									
35	6,505	5,725	7,150	6,290									

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
VF380/80R38	V0P4M3	TL	154D	35	8,250	W12, DW12, DW12A, W13	14.7	62.4	28.3	189	58	43	750
Inflation Pressure (psi)	43 mph (lbs)	Duals (lbs)	40 mph (lbs)	Duals (lbs)									
6 (Duals)	--	2,560	--	2,815									
9	3,515	3,095	3,860	3,395									
12	4,130	3,635	4,540	3,995									
17	5,315	4,675	5,840	5,140									
23	6,505	5,725	7,150	6,290									
29	7,145	6,290	7,850	6,910									
32	7,325	6,445	8,050	7,085									
35	7,510	6,610	8,250	7,260									

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
380/80R42	40P6RZ	TL	150D	46	7,400	W12A, DW12A, W13A	14.5	66.0	30.9	202	58	44	800

See Next Page for the Load & Inflation Table



LSW OPTIONS



FUEL ECONOMY



INCREASED TRACTION



IMPROVED PROFITABILITY



TIME SAVING



LOW SOIL COMPACTION



INCREASED PUNCTURE RESISTANCE



40P6RZ LOAD & INFLATION TABLE

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	1,920	2,110	2,215	2,310	2,425	2,500	2,825	3,165	12	3,585
12	3,110	3,420	3,590	3,745	3,935	4,055	4,585	5,130	17	5,815
17	4,005	4,400	4,620	4,820	5,060	5,215	5,895	6,600	23	7,480
23	4,880	5,360	5,630	5,870	6,165	6,350	7,180	8,040	29	9,110
29	5,315	5,840	6,130	6,395	6,715	6,920	7,825	8,760	36	9,930
35	5,595	6,150	6,460	6,735	7,070	7,290	8,240	9,225	44	10,455
41	6,190	6,800	7,140	7,445	7,820	8,060	9,110	10,200	51	11,560
46	6,735	7,400	7,770	8,105	8,510	8,770	9,915	11,100	58	12,580

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
380/85R24	40P234	TL	131D	23	4,300	W11, W12, W13	14.7	49.2	22.1	148	51	--	600

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	1,545	1,700	1,785	1,860	1,955	2,015	2,280	2,550	12	2,890
9	2,130	2,340	2,455	2,560	2,690	2,775	3,135	3,510	15	3,980
12	2,510	2,760	2,900	3,020	3,175	3,270	3,700	4,140	17	4,690
15	2,805	3,080	3,235	3,375	3,540	3,650	4,125	4,620	20	5,235
17	3,205	3,520	3,695	3,855	4,050	4,170	4,715	5,280	23	5,985
20	3,515	3,860	4,055	4,225	4,440	4,575	5,170	5,790	26	6,560
23	3,915	4,300	4,515	4,710	4,945	5,095	5,760	6,450	29	7,310

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
380/85R28	40P238	TL	133D	23	4,540	W11, W12, W13	15.3	53.3	24.0	161	58	40	650

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	1,675	1,840	1,930	2,015	2,115	2,180	2,465	2,760	12	3,130
9	2,310	2,540	2,665	2,780	2,920	3,010	3,405	3,810	15	4,320
12	2,650	2,910	3,055	3,185	3,345	3,450	3,900	4,365	17	4,945
15	3,005	3,300	3,465	3,615	3,795	3,910	4,420	4,950	20	5,610
17	3,405	3,740	3,925	4,095	4,300	4,430	5,010	5,610	23	6,360
20	3,805	4,180	4,390	4,575	4,805	4,955	5,600	6,270	26	7,105
23	4,130	4,540	4,765	4,970	5,220	5,380	6,085	6,810	29	7,720

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
380/85R30	40P230	TL	135D	23	4,800	W11, W12, W13, DW13A	15.8	55.1	24.9	166	58	41	675

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	1,720	1,890	1,985	2,070	2,175	2,240	2,535	2,835	12	3,215
9	2,365	2,600	2,730	2,845	2,990	3,080	3,485	3,900	15	4,420
12	2,730	3,000	3,150	3,285	3,450	3,555	4,020	4,500	17	5,100
15	3,110	3,420	3,590	3,745	3,935	4,055	4,585	5,130	20	5,815
17	3,515	3,860	4,055	4,225	4,440	4,575	5,170	5,790	23	6,560
20	3,915	4,300	4,515	4,710	4,945	5,095	5,760	6,450	26	7,310
23	4,370	4,800	5,040	5,255	5,520	5,690	6,430	7,200	29	8,160



OPTITRAC



LSW OPTIONS



FUEL ECONOMY



INCREASED TRACTION



IMPROVED PROFITABILITY



TIME SAVING



LOW SOIL COMPACTION



INCREASED PUNCTURE RESISTANCE


Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
380/85R34	40P2HP	TL	137D	23	5,080	W11, W12, W13	15.9	59.2	26.6	178	58	42	725
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service				
6 (Duals)	1,820	2,000	2,100	2,190	2,300	2,370	2,680	3,000	Inflation Pressure (psi)	6 mph (lbs)			
9	2,510	2,760	2,900	3,020	3,175	3,270	3,700	4,140	12	3,400			
12	2,910	3,200	3,360	3,505	3,680	3,790	4,290	4,800	15	4,690			
15	3,310	3,640	3,820	3,985	4,185	4,315	4,880	5,460	17	5,440			
17	3,715	4,080	4,285	4,470	4,690	4,835	5,465	6,120	20	6,190			
20	4,130	4,540	4,765	4,970	5,220	5,380	6,085	6,810	23	6,935			
23	4,625	5,080	5,335	5,565	5,840	6,020	6,805	7,620	26	7,720			
									29	8,635			

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
380/90R50	40P4JR	TL	151D	35	7,600	W12A, W12B, DW12A, W13A, W13B	15.5	77.1	35.3	234	56	47	975
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service				
6 (Duals)	2,330	2,560	2,690	2,805	2,945	3,035	3,430	3,840	Inflation Pressure (psi)	6 mph (lbs)			
9	3,205	3,520	3,695	3,855	4,050	4,170	4,715	5,280	12	4,350			
12	3,715	4,080	4,285	4,470	4,690	4,835	5,465	6,120	15	5,985			
17	4,730	5,200	5,460	5,695	5,980	6,160	6,970	7,800	17	6,935			
23	5,825	6,400	6,720	7,010	7,360	7,585	8,575	9,600	23	8,840			
29	6,325	6,950	7,300	7,610	7,990	8,235	9,315	10,425	29	10,880			
32	6,735	7,400	7,770	8,105	8,510	8,770	9,915	11,100	36	11,815			
35	6,915	7,600	7,980	8,320	8,740	9,005	10,185	11,400	41	12,580			
									44	12,920			

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
380/90R54	40P4V9	TL	152D	35	7,850	W12A, W12B	15.2	81.0	37.0	255	56	48	1,025
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service				
6 (Duals)	2,400	2,640	2,770	2,890	3,035	3,130	3,540	3,960	Inflation Pressure (psi)	6 mph (lbs)			
9	3,310	3,640	3,820	3,985	4,185	4,315	4,880	5,460	12	4,490			
12	3,915	4,300	4,515	4,710	4,945	5,095	5,760	6,450	15	6,190			
17	5,025	5,520	5,795	6,045	6,350	6,540	7,395	8,280	17	7,310			
23	6,005	6,600	6,930	7,225	7,590	7,820	8,845	9,900	23	9,385			
29	6,735	7,400	7,770	8,105	8,510	8,770	9,915	11,100	29	11,220			
32	6,915	7,600	7,980	8,320	8,740	9,005	10,185	11,400	36	12,580			
35	7,145	7,850	8,245	8,595	9,030	9,300	10,520	11,775	41	12,920			
									44	13,345			

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
420/70R24	40P245	TL	130D	23	4,180	W12, W13, W14L	16.8	48.6	21.7	146	56	38	600

See Next Page for the Load & Inflation Table



LSW OPTIONS



FUEL ECONOMY



INCREASED TRACTION



IMPROVED PROFITABILITY



TIME SAVING



LOW SOIL COMPACTION



INCREASED PUNCTURE RESISTANCE



40P245 LOAD & INFLATION TABLE

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	1,545	1,700	1,785	1,860	1,955	2,015	2,280	2,550	12	2,890
9	2,065	2,270	2,385	2,485	2,610	2,690	3,040	3,405	15	3,860
12	2,440	2,680	2,815	2,935	3,080	3,175	3,590	4,020	17	4,555
15	2,805	3,080	3,235	3,375	3,540	3,650	4,125	4,620	20	5,235
17	3,110	3,420	3,590	3,745	3,935	4,055	4,585	5,130	23	5,815
20	3,515	3,860	4,055	4,225	4,440	4,575	5,170	5,790	26	6,560
23	3,805	4,180	4,390	4,575	4,805	4,955	5,600	6,270	29	7,105

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32" in)	RCI	SRI
420/70R28	40P2DH	TL	133D	23	4,540	W12, W13, W14L	16.9	53.0	24.0	160	55	40	650

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	1,635	1,795	1,885	1,965	2,065	2,125	2,405	2,695	12	3,050
9	2,250	2,470	2,595	2,705	2,840	2,925	3,310	3,705	15	4,200
12	2,650	2,910	3,055	3,185	3,345	3,450	3,900	4,365	17	4,945
15	3,005	3,300	3,465	3,615	3,795	3,910	4,420	4,950	20	5,610
17	3,405	3,740	3,925	4,095	4,300	4,430	5,010	5,610	23	6,360
20	3,715	4,080	4,285	4,470	4,690	4,835	5,465	6,120	26	6,935
23	4,130	4,540	4,765	4,970	5,220	5,380	6,085	6,810	29	7,720

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32" in)	RCI	SRI
420/85R28	40P248	TL	139D	23	5,360	W12, W13, W14L, W15L	17.8	55.4	24.4	166	60	41	675

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	1,980	2,175	2,285	2,380	2,500	2,575	2,915	3,265	12	3,700
9	2,650	2,910	3,055	3,185	3,345	3,450	3,900	4,365	15	4,945
12	3,110	3,420	3,590	3,745	3,935	4,055	4,585	5,130	17	5,815
15	3,515	3,860	4,055	4,225	4,440	4,575	5,170	5,790	20	6,560
17	4,005	4,400	4,620	4,820	5,060	5,215	5,895	6,600	23	7,480
20	4,495	4,940	5,185	5,410	5,680	5,855	6,620	7,410	26	8,400
23	4,880	5,360	5,630	5,870	6,165	6,350	7,180	8,040	29	9,110

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32" in)	RCI	SRI
420/85R30	40P479	TL	145D	35	6,400	W12, W13, DW13, DW13A, W14L, DW14A, W15L, DW15A	17.4	58.6	26.3	177	62	42	725

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	2,035	2,235	2,345	2,445	2,570	2,650	2,995	3,355	12	3,800
9	2,730	3,000	3,150	3,285	3,450	3,555	4,020	4,500	15	5,100
12	3,205	3,520	3,695	3,855	4,050	4,170	4,715	5,280	17	5,985
17	4,130	4,540	4,765	4,970	5,220	5,380	6,085	6,810	23	7,720
23	5,025	5,520	5,795	6,045	6,350	6,540	7,395	8,280	29	9,385
26	5,315	5,840	6,130	6,395	6,715	6,920	7,825	8,760	33	9,920
29	5,460	6,000	6,300	6,570	6,900	7,110	8,040	9,000	36	10,200
35	5,825	6,400	6,720	7,010	7,360	7,585	8,575	9,600	44	10,880



OPTITRAC



LSW OPTIONS



FUEL ECONOMY



INCREASED TRACTION



IMPROVED PROFITABILITY



TIME SAVING



LOW SOIL COMPACTION



INCREASED PUNCTURE RESISTANCE

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
LSW420/75R34	G0P379	TL	142D	29	5,840	W15L	16.9	58.0	26.3	176	62	42	725
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service				
6 (Duals)	1,920	2,110	2,215	2,310	2,425	2,500	2,825	3,165	Inflation Pressure (psi)	6 mph (lbs)			
9	2,650	2,910	3,055	3,185	3,345	3,450	3,900	4,365	12	3,585			
12	3,005	3,300	3,465	3,615	3,795	3,910	4,420	4,950	15	4,945			
15	3,515	3,860	4,055	4,225	4,440	4,575	5,170	5,790	17	5,610			
17	3,915	4,300	4,515	4,710	4,945	5,095	5,760	6,450	20	6,560			
20	4,370	4,800	5,040	5,255	5,520	5,690	6,430	7,200	23	7,310			
23	4,730	5,200	5,460	5,695	5,980	6,160	6,970	7,800	26	8,160			
29	5,315	5,840	6,130	6,395	6,715	6,920	7,825	8,760	29	8,840			
									36	9,930			

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
LSW420/80R30	G0P248	TL	138D	23	5,200	DW15A	17.4	55.9	25.6	170	60	41	675
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service				
6 (Duals)	1,920	2,110	2,215	2,310	2,425	2,500	2,825	3,165	Inflation Pressure (psi)	6 mph (lbs)			
9	2,575	2,830	2,970	3,100	3,255	3,355	3,790	4,245	12	3,585			
12	3,005	3,300	3,465	3,615	3,795	3,910	4,420	4,950	15	4,810			
15	3,515	3,860	4,055	4,225	4,440	4,575	5,170	5,790	17	5,610			
17	3,915	4,300	4,515	4,710	4,945	5,095	5,760	6,450	20	6,560			
20	4,370	4,800	5,040	5,255	5,520	5,690	6,430	7,200	23	7,310			
23	4,730	5,200	5,460	5,695	5,980	6,160	6,970	7,800	26	8,160			
									29	8,840			

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
LSW420/80R30	G0PF48	TL	153D	29	8,050	DW15A	17.5	55.9	25.1	168	60	41	675
Inflation Pressure (psi)	43 mph (lbs)	Duals (lbs)	40 mph (lbs)	Duals (lbs)									
6 (Duals)	--	2,645	--	2,905									
9	3,605	3,170	3,960	3,485									
12	4,260	3,750	4,680	4,120									
15	4,880	4,295	5,360	4,715									
17	5,460	4,805	6,000	5,280									
20	6,005	5,285	6,600	5,810									
23	6,735	5,925	7,400	6,510									
29	7,325	6,445	8,050	7,085									

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
420/85R34	40P4M4	TL	147D	35	6,800	W13, W14L, DW14A, W15A, W15L, DW15A	17.5	62.1	28.2	188	60	43	750

See Next Page for the Load & Inflation Table



LSW OPTIONS



FUEL ECONOMY



INCREASED TRACTION



IMPROVED PROFITABILITY



TIME SAVING



LOW SOIL COMPACTION



INCREASED PUNCTURE RESISTANCE



Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	2,150	2,360	2,480	2,585	2,715	2,795	3,160	3,540	12	4,010
9	2,910	3,200	3,360	3,505	3,680	3,790	4,290	4,800	15	5,440
12	3,405	3,740	3,925	4,095	4,300	4,430	5,010	5,610	17	6,360
17	4,370	4,800	5,040	5,255	5,520	5,690	6,430	7,200	23	8,160
23	5,315	5,840	6,130	6,395	6,715	6,920	7,825	8,760	29	9,930
29	5,825	6,400	6,720	7,010	7,360	7,585	8,575	9,600	36	10,880
32	6,005	6,600	6,930	7,225	7,590	7,820	8,845	9,900	41	11,220
35	6,190	6,800	7,140	7,445	7,820	8,060	9,110	10,200	44	11,560

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32" in)	RCI	SRI
IF420/85R34	FOP2M4	TL	148D	23	6,950	W13, W14L, DW14A, W15A, W15L, DW15A	17.1	62.0	28.0	187	60	43	750

Inflation Pressure (psi)	43 mph (lbs)	Duals (lbs)	40 mph (lbs)	Duals (lbs)
6 (Duals)	--	2,560	--	2,815
9	3,515	3,095	3,860	3,395
12	4,130	3,635	4,540	3,995
15	4,625	4,070	5,080	4,470
17	5,315	4,675	5,840	5,140
20	5,825	5,125	6,400	5,630
23	6,325	5,565	6,950	6,115

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32" in)	RCI	SRI
VF420/85R34	VOP2M4	TL	154D	23	8,250	W13, W14L, DW14A, W15A, W15L, DW15A	17.1	62.0	27.2	185	60	43	750

Inflation Pressure (psi)	43 mph (lbs)	Duals (lbs)	40 mph (lbs)	Duals (lbs)
6 (Duals)	--	2,995	--	3,290
9	4,130	3,635	4,540	3,995
12	4,730	4,160	5,200	4,575
15	5,460	4,805	6,000	5,280
17	6,190	5,445	6,800	5,985
20	6,735	5,925	7,400	6,510
23	7,510	6,610	8,250	7,260

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32" in)	RCI	SRI
420/85R38	40P468	TL	149D	35	7,150	W12, DW12A, W14L, DW14A, W15A, W15L, DW15A	17.6	66.1	30.3	201	60	44	800

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	2,265	2,490	2,615	2,725	2,865	2,950	3,335	3,735	12	4,235
9	3,110	3,420	3,590	3,745	3,935	4,055	4,585	5,130	15	5,815
12	3,605	3,960	4,160	4,335	4,555	4,695	5,305	5,940	17	6,730
17	4,625	5,080	5,335	5,565	5,840	6,020	6,805	7,620	23	8,635
23	5,595	6,150	6,460	6,735	7,070	7,290	8,240	9,225	29	10,455
29	6,190	6,800	7,140	7,445	7,820	8,060	9,110	10,200	36	11,560
32	6,325	6,950	7,300	7,610	7,990	8,235	9,315	10,425	41	11,815
35	6,505	7,150	7,510	7,830	8,225	8,475	9,580	10,725	44	12,155



OPTITRAC



LSW OPTIONS



FUEL ECONOMY



INCREASED TRACTION



IMPROVED PROFITABILITY



TIME SAVING



LOW SOIL COMPACTION



INCREASED PUNCTURE RESISTANCE


Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim				Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
460/85R30	40P250	TL	145D	23	6,400	W14L, DW14A, W15L, DW15A, W16A, W16L, DW16A				18.5	61.2	27.4	184	58	--	725
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service							
6 (Duals)	2,330	2,560	2,690	2,805	2,945	3,035	3,430	3,840	Inflation Pressure (psi)	6 mph (lbs)						
9	3,205	3,520	3,695	3,855	4,050	4,170	4,715	5,280	12	4,350						
12	3,715	4,080	4,285	4,470	4,690	4,835	5,465	6,120	15	5,985						
15	4,260	4,680	4,915	5,125	5,380	5,545	6,270	7,020	17	6,935						
17	4,730	5,200	5,460	5,695	5,980	6,160	6,970	7,800	20	7,955						
20	5,315	5,840	6,130	6,395	6,715	6,920	7,825	8,760	23	8,840						
23	5,825	6,400	6,720	7,010	7,360	7,585	8,575	9,600	26	9,930						
									29	10,880						

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim				Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
460/85R34	40P254	TL	147D	23	6,800	DW14A, W15A, W15L, DW15A, W16A, W16L, DW16A				19.1	65.3	29.5	197	58	44	775
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service							
6 (Duals)	2,465	2,710	2,845	2,965	3,115	3,210	3,630	4,065	Inflation Pressure (psi)	6 mph (lbs)						
9	3,310	3,640	3,820	3,985	4,185	4,315	4,880	5,460	12	4,605						
12	3,915	4,300	4,515	4,710	4,945	5,095	5,760	6,450	15	6,190						
15	4,495	4,940	5,185	5,410	5,680	5,855	6,620	7,410	17	7,310						
17	5,025	5,520	5,795	6,045	6,350	6,540	7,395	8,280	20	8,400						
20	5,595	6,150	6,460	6,735	7,070	7,290	8,240	9,225	23	9,385						
23	6,190	6,800	7,140	7,445	7,820	8,060	9,110	10,200	26	10,455						
									29	11,560						

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim				Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
460/85R38	40P277	TL	149D	23	7,150	W14L, DW14A, W15A, W15L, DW15A, W16A, W16L, DW16A, DD16				18.3	69.9	31.1	210	58	45	825
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service							
6 (Duals)	2,560	2,815	2,955	3,080	3,235	3,335	3,770	4,225	Inflation Pressure (psi)	6 mph (lbs)						
9	3,515	3,860	4,055	4,225	4,440	4,575	5,170	5,790	12	4,785						
12	4,130	4,540	4,765	4,970	5,220	5,380	6,085	6,810	15	6,560						
15	4,730	5,200	5,460	5,695	5,980	6,160	6,970	7,800	17	7,720						
17	5,315	5,840	6,130	6,395	6,715	6,920	7,825	8,760	20	8,840						
20	5,825	6,400	6,720	7,010	7,360	7,585	8,575	9,600	23	9,930						
23	6,505	7,150	7,510	7,830	8,225	8,475	9,580	10,725	26	10,880						
									29	12,155						

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim				Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
480/70R30	40P640	TL	152D	46	7,850	W14L, W15L, DW15A, W16A, W16L				18.6	59.1	27.1	180	64	42	700

See Next Page for the Load & Inflation Table



LSW OPTIONS



FUEL ECONOMY



INCREASED TRACTION



IMPROVED PROFITABILITY



TIME SAVING



LOW SOIL COMPACTION



INCREASED PUNCTURE RESISTANCE



Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
9	2,805	3,080	3,235	3,375	3,540	3,650	4,125	4,620	15	5,235
12	3,310	3,640	3,820	3,985	4,185	4,315	4,880	5,460	17	6,190
17	4,260	4,680	4,915	5,125	5,380	5,545	6,270	7,020	23	7,955
23	5,170	5,680	5,965	6,220	6,530	6,730	7,610	8,520	29	9,655
29	5,825	6,400	6,720	7,010	7,360	7,585	8,575	9,600	36	10,880
35	6,190	6,800	7,140	7,445	7,820	8,060	9,110	10,200	44	11,560
41	6,735	7,400	7,770	8,105	8,510	8,770	9,915	11,100	51	12,580
46	7,145	7,850	8,245	8,595	9,030	9,300	10,520	11,775	58	13,345

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32" in)	RCI	SRI
480/70R34	40P3M5	TL	146D	29	6,600	W14L, W15A, W15L, DW15A, W16A, W16L, DW16A	18.9	62.5	28.3	189	64	43	750
480/70R34	40P6M5	TL	155D	46	8,550	W14L, W15A, W15L, DW15A, W16A, W16L, DW16A	18.9	62.4	28.8	190	64	43	750

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	2,210	2,430	2,550	2,660	2,795	2,880	3,255	3,645	12	4,130
9	3,005	3,300	3,465	3,615	3,795	3,910	4,420	4,950	15	5,610
12	3,515	3,860	4,055	4,225	4,440	4,575	5,170	5,790	17	6,560
15	4,005	4,400	4,620	4,820	5,060	5,215	5,895	6,600	20	7,480
17	4,495	4,940	5,185	5,410	5,680	5,855	6,620	7,410	23	8,400
20	5,025	5,520	5,795	6,045	6,350	6,540	7,395	8,280	26	9,385
23	5,170	5,680	5,965	6,220	6,530	6,730	7,610	8,520	29	9,655
29	6,005	6,600	6,930	7,225	7,590	7,820	8,845	9,900	36	11,220
END OF 40P3M5										
35	6,505	7,150	7,510	7,830	8,225	8,475	9,580	10,725	44	12,155
41	7,145	7,850	8,245	8,595	9,030	9,300	10,520	11,775	51	13,345
46	7,780	8,550	8,980	9,360	9,835	10,130	11,455	12,825	58	14,535

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32" in)	RCI	SRI
480/80R42	40P442	TL	156D	35	8,800	W14L, DW14L, W15L, DW15L, W16A, W16L, DW16A, DW16L, DD16	19.4	72.0	32.9	219	62	46	875

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	2,740	3,010	3,160	3,295	3,460	3,565	4,035	4,515	12	5,115
9	3,715	4,080	4,285	4,470	4,690	4,835	5,465	6,120	15	6,935
12	4,370	4,800	5,040	5,255	5,520	5,690	6,430	7,200	17	8,160
17	5,595	6,150	6,460	6,735	7,070	7,290	8,240	9,225	23	10,455
23	6,915	7,600	7,980	8,320	8,740	9,005	10,185	11,400	29	12,920
29	7,510	8,250	8,665	9,035	9,490	9,775	11,055	12,375	36	14,025
32	7,780	8,550	8,980	9,360	9,835	10,130	11,455	12,825	41	14,535
35	8,010	8,800	9,240	9,635	10,120	10,430	11,790	13,200	44	14,960

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32" in)	RCI	SRI
LSW480/70R46	GOPD42	TL	160D	23	9,900	DW16B, DD16	18.8	72.2	32.5	218	62	46	875
LSW480/70R46	GOPP42	TL	174D	52	14,800	DW16B, DD16	18.5	73.5	33.0	221	62	46	875

See Next Page for the Load & Inflation Table



OPTITRAC



LSW OPTIONS



FUEL ECONOMY



INCREASED TRACTION



IMPROVED PROFITABILITY



TIME SAVING



LOW SOIL COMPACTION



INCREASED PUNCTURE RESISTANCE

GOPD42 & GOPP42 LOAD & INFLATION TABLE

Inflation Pressure (psi)	43 mph (lbs)	Duals (lbs)	40 mph (lbs)	Duals (lbs)
6 (Duals)	--	3,635	--	3,995
12	5,825	5,125	6,400	5,630
15	6,505	5,725	7,150	6,290
17	7,325	6,445	8,050	7,085
20	8,280	7,285	9,100	8,010
23	9,010	7,930	9,900	8,710
END OF GOPD42				
26	8,410	7,400	9,240	8,130
29	9,735	8,565	10,700	9,415
32	10,375	9,130	11,400	10,030
35	10,645	9,370	11,700	10,295
41	11,650	10,250	12,800	11,265
46	12,375	10,890	13,600	11,970
49	13,015	11,455	14,300	12,585
52	13,470	11,855	14,800	13,025

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
480/80R46	40P447	TL	158D	35	9,350	W14L, DW14L, W15L, DW15L, W16A, W16L, DW16A, DW16L, DD16	19.1	76.8	35.4	234	62	47	825

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	2,915	3,205	3,365	3,510	3,685	3,800	4,295	4,810	12	5,450
9	3,915	4,300	4,515	4,710	4,945	5,095	5,760	6,450	15	7,310
12	4,625	5,080	5,335	5,565	5,840	6,020	6,805	7,620	17	8,635
17	5,825	6,400	6,720	7,010	7,360	7,585	8,575	9,600	23	10,880
23	7,145	7,850	8,245	8,595	9,030	9,300	10,520	11,775	29	13,345
29	7,780	8,550	8,980	9,360	9,835	10,130	11,455	12,825	36	14,535
32	8,280	9,100	9,555	9,965	10,465	10,785	12,195	13,650	41	15,470
35	8,510	9,350	9,820	10,240	10,755	11,080	12,530	14,025	44	15,895

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
480/80R50	40P451	TL	159D	35	9,650	W14L, DW14L, W15A, W15B, W15L, DW15A, DW15B, DW15L, W16L, DW16A, DW16B, DW16L	18.3	81.2	37.4	247	62	48	975

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	2,995	3,290	3,455	3,605	3,785	3,900	4,410	4,935	12	5,595
9	4,130	4,540	4,765	4,970	5,220	5,380	6,085	6,810	15	7,720
12	4,730	5,200	5,460	5,695	5,980	6,160	6,970	7,800	17	8,840
17	6,190	6,800	7,140	7,445	7,820	8,060	9,110	10,200	23	11,560
23	7,510	8,250	8,665	9,035	9,490	9,775	11,055	12,375	29	14,025
29	8,280	9,100	9,555	9,965	10,465	10,785	12,195	13,650	36	15,470
32	8,510	9,350	9,820	10,240	10,755	11,080	12,530	14,025	41	15,895
35	8,780	9,650	10,135	10,565	11,100	11,435	12,930	14,475	44	16,405

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
IF480/80R50	F0P451	TL	166D	35	11,700	W15A, W15B, DW15A, DW15B, DW16A, DW16B	18.3	80.4	36.8	244	62	48	975

See Next Page for the Load & Inflation Table



LSW OPTIONS



FUEL ECONOMY



INCREASED TRACTION



IMPROVED PROFITABILITY



TIME SAVING



LOW SOIL COMPACTION



INCREASED PUNCTURE RESISTANCE



FOP451 LOAD & INFLATION TABLE

Inflation Pressure (psi)	43 mph (lbs)	Duals (lbs)	40 mph (lbs)	Duals (lbs)
6 (Duals)	--	3,635	--	3,995
9	4,880	4,295	5,360	4,715
12	5,825	5,125	6,400	5,630
17	7,325	6,445	8,050	7,085
23	9,010	7,930	9,900	8,710
29	9,735	8,565	10,700	9,415
32	10,375	9,130	11,400	10,030
35	10,645	9,370	11,700	10,295

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
VF480/80R50	V0P451	TL	171D	35	13,600	W15A, W15B, DW15A, DW15B, DW16A, DW16B	18.3	80.9	36.8	245	62	48	975

Inflation Pressure (psi)	43 mph (lbs)	Duals (lbs)	40 mph (lbs)	Duals (lbs)
6 (Duals)	--	4,165	--	4,575
9	5,825	5,125	6,400	5,630
12	6,735	5,925	7,400	6,510
17	8,510	7,490	9,350	8,230
23	10,645	9,370	11,700	10,295
29	11,650	10,250	12,800	11,265
32	12,010	10,570	13,200	11,615
35	12,375	10,890	13,600	11,970

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
480/95R50	40P462	TL	164D	35	11,000	W14L, W15A, W15B, W15L, DW15A, DW15B, W16B, W16L, DW16B	19.9	85.7	39.1	260	64	49	1,075

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	3,445	3,785	3,975	4,145	4,355	4,485	5,070	5,680	12	6,435
9	4,730	5,200	5,460	5,695	5,980	6,160	6,970	7,800	15	8,840
12	5,460	6,000	6,300	6,570	6,900	7,110	8,040	9,000	17	10,200
17	7,145	7,850	8,245	8,595	9,030	9,300	10,520	11,775	23	13,345
23	8,780	9,650	10,135	10,565	11,100	11,435	12,930	14,475	29	16,405
29	9,555	10,500	11,025	11,500	12,075	12,445	14,070	15,750	36	17,850
32	9,735	10,700	11,235	11,715	12,305	12,680	14,340	16,050	41	18,190
35	10,010	11,000	11,550	12,045	12,650	13,035	14,740	16,500	44	18,700

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
520/70R38	40P28T	TL	150D	23	7,400	W15A, W15L, W16A, W16L, DD16, W18A, W18L, DD18	21.0	68.9	30.7	207	64	45	825

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	2,645	2,905	3,050	3,180	3,340	3,440	3,895	4,360	12	4,940
9	3,605	3,960	4,160	4,335	4,555	4,695	5,305	5,940	15	6,730
12	4,260	4,680	4,915	5,125	5,380	5,545	6,270	7,020	17	7,955
15	4,730	5,200	5,460	5,695	5,980	6,160	6,970	7,800	20	8,840
17	5,460	6,000	6,300	6,570	6,900	7,110	8,040	9,000	23	10,200
20	6,005	6,600	6,930	7,225	7,590	7,820	8,845	9,900	26	11,220
23	6,735	7,400	7,770	8,105	8,510	8,770	9,915	11,100	29	12,580



LSW OPTIONS



FUEL ECONOMY



INCREASED TRACTION



IMPROVED PROFITABILITY



TIME SAVING



LOW SOIL COMPACTION



INCREASED PUNCTURE RESISTANCE


Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
520/85R38	40P289	TL	155D	23	8,550	W16A, DW16A, DD16, W18A, DW18A, DD18	21.6	73.0	32.4	219	63	46	875
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service				
6 (Duals)	3,090	3,395	3,565	3,720	3,905	4,025	4,550	5,095	Inflation Pressure (psi)	6 mph (lbs)			
9	4,260	4,680	4,915	5,125	5,380	5,545	6,270	7,020	12	5,770			
12	5,025	5,520	5,795	6,045	6,350	6,540	7,395	8,280	15	7,955			
15	5,995	6,150	6,460	6,735	7,070	7,290	8,240	9,225	17	9,385			
17	6,325	6,950	7,300	7,610	7,990	8,235	9,315	10,425	20	10,455			
20	7,145	7,850	8,245	8,595	9,030	9,300	10,520	11,775	23	11,815			
23	7,780	8,550	8,980	9,360	9,835	10,130	11,455	12,825	26	13,345			
									29	14,535			

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
520/85R42	40P252	TL	157D	23	9,100	W15L, W16A, W16L, DW16A, DW16L, DD16, DD16L, W18A, W18L, DW18A, DW18B, DD18, DD18L	21.0	76.0	34.1	229	70	47	925
520/85R42	40P452	TL	162D	35	10,500	W15L, W16A, W16L, DW16A, DW16L, DD16, DD16L, W18A, W18L, DW18A, DW18B, DD18, DD18L	21.2	76.1	34.4	230	70	47	925
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service				
6 (Duals)	3,265	3,590	3,770	3,930	4,130	4,255	4,810	5,385	Inflation Pressure (psi)	6 mph (lbs)			
9	4,495	4,940	5,185	5,410	5,680	5,855	6,620	7,410	12	6,105			
12	5,170	5,680	5,965	6,220	6,530	6,730	7,610	8,520	15	8,400			
15	6,005	6,600	6,930	7,225	7,590	7,820	8,845	9,900	17	9,655			
17	6,735	7,400	7,770	8,105	8,510	8,770	9,915	11,100	20	11,220			
20	7,510	8,250	8,665	9,035	9,490	9,775	11,055	12,375	23	12,580			
23	8,280	9,100	9,555	9,965	10,465	10,785	12,195	13,650	26	14,025			
26	8,510	9,350	9,820	10,240	10,755	11,080	12,530	14,025	29	15,470			
29	9,010	9,900	10,395	10,840	11,385	11,730	13,265	14,850	33	15,895			
32	9,280	10,200	10,710	11,170	11,730	12,085	13,670	15,300	36	16,830			
35	9,555	10,500	11,025	11,500	12,075	12,445	14,070	15,750	41	17,340			
									44	17,850			

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
IF520/85R42CF0	F0PH52	TL	169D	35	12,800	W16A, DW16A, DD16, W18A, DW18A, DW18B, DD18	21.0	75.9	34.6	230	70	47	925
Inflation Pressure (psi)	43 mph (lbs)	Duals (lbs)	40 mph (lbs)	Duals (lbs)	Cyclic Service								
6 (Duals)	--	3,955	--	4,345	20 mph (lbs)	Duals (lbs)	10 mph (lbs)	Duals (lbs)					
12	6,325	5,565	6,950	6,115	--	5,650	--	6,740					
15	7,145	6,290	7,850	6,910	9,035	7,950	10,775	9,480					
17	8,010	7,050	8,800	7,745	10,205	8,980	12,170	10,710					
23	9,735	8,565	10,700	9,415	11,440	10,065	13,640	12,005					
29	10,645	9,370	11,700	10,295	13,910	12,240	16,585	14,595					
32	11,195	9,850	12,300	10,825	15,210	13,385	18,135	15,960					
35	11,650	10,250	12,800	11,265	15,990	14,070	19,065	16,776					
					16,640	14,645	19,840	17,460					

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
520/85R46	40P271	TL	158D	23	9,350	W15L, W16A, W16L, DW16L, DD16, DD16L, W18A, W18L, DW18B, DD18L	20.8	80.8	35.8	242	66	48	975

See Next Page for the Load & Inflation Table



LSW OPTIONS



FUEL ECONOMY



INCREASED TRACTION



IMPROVED PROFITABILITY



TIME SAVING



LOW SOIL COMPACTION



INCREASED PUNCTURE RESISTANCE



40P271 LOAD & INFLATION TABLE

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	3,445	3,785	3,975	4,145	4,355	4,485	5,070	5,680	12	6,435
9	4,625	5,080	5,335	5,565	5,840	6,020	6,805	7,620	15	8,635
12	5,460	6,000	6,300	6,570	6,900	7,110	8,040	9,000	17	10,200
15	6,190	6,800	7,140	7,445	7,820	8,060	9,110	10,200	20	11,560
17	6,915	7,600	7,980	8,320	8,740	9,005	10,185	11,400	23	12,920
20	7,780	8,550	8,980	9,360	9,835	10,130	11,455	12,825	26	14,535
23	8,510	9,350	9,820	10,240	10,755	11,080	12,530	14,025	29	15,895

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
VF520/85R46	V0P571	TL	179D	41	17,100	W16A, DD16, W18A, DW18B	21.3	81.3	36.2	244	66	48	975

Inflation Pressure (psi)	43 mph (lbs)	Duals (lbs)	40 mph (lbs)	Duals (lbs)
6 (Duals)	--	4,805	--	5,280
12	7,510	6,610	8,250	7,260
17	9,735	8,565	10,700	9,415
23	12,010	10,570	13,200	11,615
29	13,015	11,455	14,300	12,585
35	13,830	12,170	15,200	13,375
38	14,650	12,890	16,100	14,170
41	15,560	13,695	17,100	15,050

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
520/85R50	D064RB	TL	165A8/B	35	11,400	W15L, W16B, W16L, DW16A, DW16B, DW16L, W18L	19.9	84.2	39.1	257	65	49	1,025

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
						Inflation Pressure (psi)	6 mph (lbs)
9	4,715	5,045	5,235	6,320	7,075	15	8,015
12	6,150	6,580	6,825	8,240	9,225	17	10,455
15	7,150	7,650	7,935	9,580	10,725	20	12,155
20	8,800	9,415	9,770	11,790	13,200	26	14,960
23	9,650	10,325	10,710	12,930	14,475	29	16,405
29	10,700	11,450	11,875	14,340	16,050	36	18,190
32	11,000	11,770	12,210	14,740	16,500	41	18,700
35	11,400	12,200	12,655	15,275	17,100	44	19,380

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
540/65R24	40P475	TL	146D	35	6,600	W16L, DW16A, DW16L, W18L, DW18A	N/A	N/A	N/A	N/A	63	39	625

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
9	2,805	3,080	3,235	3,375	3,540	3,650	4,125	4,620	15	5,235
12	3,310	3,640	3,820	3,985	4,185	4,315	4,880	5,460	17	6,190
15	3,715	4,080	4,285	4,470	4,690	4,835	5,465	6,120	20	6,935
20	4,625	5,080	5,335	5,565	5,840	6,020	6,805	7,620	26	8,635
26	5,315	5,840	6,130	6,395	6,715	6,920	7,825	8,760	33	9,930
29	5,595	6,150	6,460	6,735	7,070	7,290	8,240	9,225	36	10,455
32	5,825	6,400	6,720	7,010	7,360	7,585	8,575	9,600	41	10,880
35	6,005	6,600	6,930	7,225	7,590	7,820	8,845	9,900	44	11,220



OPTITRAC



LSW OPTIONS



FUEL ECONOMY



INCREASED TRACTION



IMPROVED PROFITABILITY



TIME SAVING



LOW SOIL COMPACTION



INCREASED PUNCTURE RESISTANCE

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim				Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
540/65R34	40P4DA	TL	152D	35	7,850	W16L, W16A, W18L, W18A				20.3	62.3	28.1	188	63	43	750
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service							
9	3,310	3,640	3,820	3,985	4,185	4,315	4,880	5,460	Inflation Pressure (psi)	6 mph (lbs)						
12	3,805	4,180	4,390	4,575	4,805	4,955	5,600	6,270	15	6,190						
15	4,370	4,800	5,040	5,255	5,520	5,690	6,430	7,200	17	7,105						
20	5,460	6,000	6,300	6,570	6,900	7,110	8,040	9,000	20	8,160						
26	6,190	6,800	7,140	7,445	7,820	8,060	9,110	10,200	26	10,200						
29	6,505	7,150	7,510	7,830	8,225	8,475	9,580	10,725	33	11,560						
32	6,735	7,400	7,770	8,105	8,510	8,770	9,915	11,100	36	12,155						
35	7,145	7,850	8,245	8,595	9,030	9,300	10,520	11,775	41	12,580						
									44	13,345						

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim				Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
580/85R42	40P4D4	TL	168D	35	12,300	W18A, DW18A, DW18B, DW18L, DD18, DD18L, DW20B, MW20B				23.4	79.9	36.3	242	68	48	975
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service							
9	5,315	5,840	6,130	6,395	6,715	6,920	7,825	8,760	Inflation Pressure (psi)	6 mph (lbs)						
12	6,190	6,800	7,140	7,445	7,820	8,060	9,110	10,200	15	9,930						
15	7,145	7,850	8,245	8,595	9,030	9,300	10,520	11,775	17	11,560						
20	8,780	9,650	10,135	10,565	11,100	11,435	12,930	14,475	20	13,345						
26	10,010	11,000	11,550	12,045	12,650	13,035	14,740	16,500	26	16,405						
29	10,645	11,700	12,285	12,810	13,455	13,865	15,680	17,550	33	18,700						
32	10,920	12,000	12,600	13,140	13,800	14,220	16,080	18,000	36	19,890						
35	11,195	12,300	12,915	13,470	14,145	14,575	16,480	18,450	41	20,400						
									44	20,910						

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim				Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
IF580/85R42CFO	F0PKD4	TL	178D	41	16,500	W18A, DW18A, DW18B, DW18L, DD18, DD18L, DW20B, MW20B				23.6	80.7	36.1	243	68	48	975
Inflation Pressure (psi)		30 mph (lbs)			25 mph (lbs)		Cyclic Service									
							20 mph (lbs)				10 mph (lbs)					
12		7,325			8,050		10,465				12,480					
15		8,510			9,350		12,155				14,495					
17		9,555			10,500		13,650				16,275					
23		11,650			12,800		16,640				19,840					
29		12,650			13,900		18,070				21,545					
35		13,470			14,800		19,240				22,940					
38		14,285			15,700		20,410				24,335					
41		15,015			16,500		21,450				25,575					





Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
600/65R28	40P465	TL	154D	35	8,250	W18L, DW20B, DW21B	23.1	59.2	27.0	179	64	42	700
600/65R28	40P665	TL	160D	46	9,900	W18L, DW20B, DW21B	23.0	59.8	26.5	179	64	42	700
Inflation Pressure (psi)									Cyclic Service				
	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Inflation Pressure (psi)	6 mph (lbs)			
9	3,515	3,860	4,055	4,225	4,440	4,575	5,170	5,790	15	6,560			
12	4,130	4,540	4,765	4,970	5,220	5,380	6,085	6,810	17	7,720			
15	4,730	5,200	5,460	5,695	5,980	6,160	6,970	7,800	20	8,840			
20	5,825	6,400	6,720	7,010	7,360	7,585	8,575	9,600	26	10,880			
26	6,735	7,400	7,770	8,105	8,510	8,770	9,915	11,100	33	12,580			
29	7,145	7,850	8,245	8,595	9,030	9,300	10,520	11,775	36	13,345			
32	7,325	8,050	8,455	8,815	9,260	9,540	10,785	12,075	41	13,685			
35	7,510	8,250	8,665	9,035	9,490	9,775	11,055	12,375	44	14,025			
END OF 40P465													
38	8,010	8,800	9,240	9,635	10,120	10,430	11,790	13,200	48	14,960			
41	8,280	9,100	9,555	9,965	10,465	10,785	12,195	13,650	51	15,470			
44	8,510	9,350	9,820	10,240	10,755	11,080	12,530	14,025	55	15,895			
46	9,010	9,900	10,395	10,840	11,385	11,730	13,265	14,850	58	16,830			

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
IF600/65R28	F0P465	TL	160D	35	9,900	DW20B, DW21B	24.1	58.9	26.6	178	64	42	700
Inflation Pressure (psi)							43 mph (lbs)	40 mph (lbs)					
12							4,425	4,860					
15							5,595	6,150					
17							6,325	6,950					
20							6,915	7,600					
23							7,510	8,250					
29							8,510	9,350					
32							8,780	9,650					
35							9,010	9,900					

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
600/65R34	40P45D	TL	157D	35	9,100	W18L, DW20B, MW20B	23.6	64.0	28.8	193	66	44	775
Inflation Pressure (psi)									Cyclic Service				
	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Inflation Pressure (psi)	6 mph (lbs)			
9	3,915	4,300	4,515	4,710	4,945	5,095	5,760	6,450	15	7,310			
12	4,495	4,940	5,185	5,410	5,680	5,855	6,620	7,410	17	8,400			
15	5,170	5,680	5,965	6,220	6,530	6,730	7,610	8,520	20	9,655			
20	6,325	6,950	7,300	7,610	7,990	8,235	9,315	10,425	26	11,815			
26	7,325	8,050	8,455	8,815	9,260	9,540	10,785	12,075	33	13,685			
29	7,780	8,550	8,980	9,360	9,835	10,130	11,455	12,825	36	14,535			
32	8,010	8,800	9,240	9,635	10,120	10,430	11,790	13,200	41	14,960			
35	8,280	9,100	9,555	9,965	10,465	10,785	12,195	13,650	44	15,470			



LSW OPTIONS



FUEL ECONOMY



INCREASED TRACTION



IMPROVED PROFITABILITY



TIME SAVING



LOW SOIL COMPACTION



INCREASED PUNCTURE RESISTANCE



OPTITRAC



LSW OPTIONS



FUEL ECONOMY



INCREASED TRACTION



IMPROVED PROFITABILITY



TIME SAVING



LOW SOIL COMPACTION



INCREASED PUNCTURE RESISTANCE

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim				Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
600/70R28	40P5C3	TL	161D	41	10,200	W18L, DW18A, DW18L, DW20B, DW21B				23.5	61.2	27.8	185	66	--	725
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service							
9	3,915	4,300	4,515	4,710	4,945	5,095	5,760	6,450	Inflation Pressure (psi)	6 mph (lbs)						
12	4,625	5,080	5,335	5,565	5,840	6,020	6,805	7,620	15	7,310						
17	5,825	6,400	6,720	7,010	7,360	7,585	8,575	9,600	17	8,635						
23	7,145	7,850	8,245	8,595	9,030	9,300	10,520	11,775	23	10,880						
29	7,780	8,550	8,980	9,360	9,835	10,130	11,455	12,825	29	13,345						
35	8,280	9,100	9,555	9,965	10,465	10,785	12,195	13,650	36	14,535						
38	8,780	9,650	10,135	10,565	11,100	11,435	12,930	14,475	44	15,470						
41	9,280	10,200	10,710	11,170	11,730	12,085	13,670	15,300	48	16,405						
									51	17,340						

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim				Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
VF600/70R28CFO	V0PKC3	TL	173D	41	14,300	DW20B, DW21B				23.9	60.7	27.1	182	66	--	725
Inflation Pressure (psi)		43 mph (lbs)		40 mph (lbs)		Cyclic Service										
						20 mph (lbs)				10 mph (lbs)						
12		6,325		6,950		7,800				9,300						
15		7,325		8,050		9,035				10,775						
17		8,280		9,100		10,205				12,170						
23		10,010		11,000		12,155				14,495						
29		10,920		12,000		13,650				16,275						
32		11,195		12,300		13,910				16,585						
35		11,650		12,800		14,300				17,050						
41		13,015		14,300		15,600				18,600						

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim				Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
600/70R30	40P2M6	TL	152D	23	7,850	W18L, DW18A, DW18L, DW20B				23.3	63.4	28.7	192	66	43	750
600/70R30	40P4M6	TL	158D	35	9,350	W18L, DW18A, DW18L, DW20B				23.5	63.8	29.1	193	66	43	750
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service							
9	4,005	4,400	4,620	4,820	5,060	5,215	5,895	6,600	Inflation Pressure (psi)	6 mph (lbs)						
12	4,730	5,200	5,460	5,695	5,980	6,160	6,970	7,800	15	7,480						
15	5,315	5,840	6,130	6,395	6,715	6,920	7,825	8,760	17	8,840						
17	6,005	6,600	6,930	7,225	7,590	7,820	8,845	9,900	20	9,930						
20	6,735	7,400	7,770	8,105	8,510	8,770	9,915	11,100	23	11,220						
23	7,145	7,850	8,245	8,595	9,030	9,300	10,520	11,775	26	12,580						
29	7,780	8,550	8,980	9,360	9,835	10,130	11,455	12,825	29	13,345						
END OF 40P2M6																
26	7,780	8,550	8,980	9,360	9,835	10,130	11,455	12,825	33	14,535						
29	8,010	8,800	9,240	9,635	10,120	10,430	11,790	13,200	36	14,960						
32	8,280	9,100	9,555	9,965	10,465	10,785	12,195	13,650	41	15,470						
35	8,510	9,350	9,820	10,240	10,755	11,080	12,530	14,025	44	15,895						



Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32" in)	RCI	SRI
620/70R42	40P470	TL	166D	35	11,700	W18L, DW18L, DD18, DW20B, MW20B, DW21B	24.4	76.2	34.5	230	66	47	925
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service				
9	4,880	5,360	5,630	5,870	6,165	6,350	7,180	8,040	Inflation Pressure (psi)	6 mph (lbs)			
12	5,825	6,400	6,720	7,010	7,360	7,585	8,575	9,600	15	9,110			
15	6,505	7,150	7,510	7,830	8,225	8,475	9,580	10,725	17	10,880			
20	8,280	9,100	9,555	9,965	10,465	10,785	12,195	13,650	20	12,155			
26	9,555	10,500	11,025	11,500	12,075	12,445	14,070	15,750	26	15,470			
29	10,010	11,000	11,550	12,045	12,650	13,035	14,740	16,500	33	17,850			
32	10,375	11,400	11,970	12,485	13,110	13,510	15,275	17,100	36	18,700			
35	10,645	11,700	12,285	12,810	13,455	13,865	15,680	17,550	41	19,380			
									44	19,890			

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32" in)	RCI	SRI
620/70R46	40P481	TL	167D	35	12,000	W18L, DW18L, DW20B, MW20B	24.6	80.5	36.8	244	66	48	975
620/70R46	40P881	TL	177D	58	16,100	W18L, DW18L, DW20B, MW20B	24.9	80.4	36.8	244	66	48	975
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service				
9	5,170	5,680	5,965	6,220	6,530	6,730	7,610	8,520	Inflation Pressure (psi)	6 mph (lbs)			
12	6,005	6,600	6,930	7,225	7,590	7,820	8,845	9,900	15	9,655			
15	6,915	7,600	7,980	8,320	8,740	9,005	10,185	11,400	17	11,220			
20	8,510	9,350	9,820	10,240	10,755	11,080	12,530	14,025	20	12,920			
26	10,010	11,000	11,550	12,045	12,650	13,035	14,740	16,500	26	15,895			
29	10,375	11,400	11,970	12,485	13,110	13,510	15,275	17,100	33	18,700			
32	10,645	11,700	12,285	12,810	13,455	13,865	15,680	17,550	36	19,380			
35	10,920	12,000	12,600	13,140	13,800	14,220	16,080	18,000	41	19,890			
38	11,650	12,800	13,440	14,015	14,720	15,170	17,150	19,200	44	20,400			
41	12,010	13,200	13,860	14,455	15,180	15,640	17,690	19,800	48	21,760			
44	12,650	13,900	14,595	15,220	15,985	16,470	18,625	20,850	51	22,440			
49	13,470	14,800	15,540	16,205	17,020	17,540	19,830	22,200	55	23,630			
55	14,285	15,700	16,485	17,190	18,055	18,605	21,040	23,550	61	25,160			
58	14,650	16,100	16,905	17,630	18,515	19,080	21,575	24,150	67	26,690			
									70	27,370			

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32" in)	RCI	SRI
620/75R26	40P6FB	TL	166D	46	11,700	DW20B	N/A	N/A	N/A	N/A	72	43	750
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service				
9	4,260	4,680	4,915	5,125	5,380	5,545	6,270	7,020	Inflation Pressure (psi)	6 mph (lbs)			
15	5,595	6,150	6,460	6,735	7,070	7,290	8,240	9,225	15	7,955			
17	6,325	6,950	7,300	7,610	7,990	8,235	9,315	10,425	20	10,455			
23	7,325	8,050	8,455	8,815	9,260	9,540	10,785	12,075	23	11,815			
29	8,510	9,350	9,820	10,240	10,755	11,080	12,530	14,025	29	13,685			
35	9,010	9,900	10,395	10,840	11,385	11,730	13,265	14,850	36	15,895			
41	10,010	11,000	11,550	12,045	12,650	13,035	14,740	16,500	44	16,830			
46	10,645	11,700	12,285	12,810	13,455	13,865	15,680	17,550	51	18,700			
									58	19,890			





OPTITRAC



LSW OPTIONS



FUEL ECONOMY



INCREASED TRACTION



IMPROVED PROFITABILITY



TIME SAVING



LOW SOIL COMPACTION



INCREASED PUNCTURE RESISTANCE

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
VF620/75R26CFO	V0PMFB	TL	178D	46	16,500	DW20B	25.1	61.8	27.2	185	72	43	750
								Cyclic Service					
								20 mph (lbs)		10 mph (lbs)			
				23				13,260		15,810			
				29				14,820		17,670			
				32				15,210		18,135			
				35				15,600		18,600			
				38				16,640		19,840			
				41				17,160		20,460			
				44				18,070		21,545			
				46				18,590		22,165			

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
620/75R30	40P4FC	TL	163D	35	10,700	DW20B	25.1	65.7	30.4	200	74	44	800
										Cyclic Service			
										Inflation Pressure (psi)		6 mph (lbs)	
				9				7,410		15		8,400	
				12				8,760		17		9,930	
				15				9,900		20		11,220	
				20				12,375		26		14,025	
				26				14,475		33		16,405	
				29				14,850		36		16,830	
				32				15,750		41		17,850	
				35				16,050		44		18,190	

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
650/65R38	40P5KZ	TL	166D	41	11,700	DW20B, MW20B, DW21B, DW23B, MW23B	25.1	71.6	32.1	216	64	--	875
										Cyclic Service			
										Inflation Pressure (psi)		6 mph (lbs)	
				9				7,620		15		8,635	
				12				8,760		17		9,930	
				17				11,400		23		12,920	
				23				13,650		29		15,470	
				29				14,850		36		16,830	
				35				16,050		44		18,190	
				38				17,100		48		19,380	
				41				17,550		51		19,890	

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
LSW650/60R42	G0PDKZ	TL	168D	23	12,300	DW20B, MW20B	24.0	71.2	30.6	211	64	--	875

See Next Page for the Load & Inflation Table



GOPDKZ LOAD & INFLATION TABLE

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	Cyclic Service	
			20 mph (lbs)	10 mph (lbs)
12	7,145	7,850	8,840	10,540
15	8,280	9,100	9,880	11,780
17	9,280	10,200	11,115	13,255
20	10,375	11,400	12,545	14,960
23	11,195	12,300	13,650	16,275

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
650/65R42	40P6TT	TL	170D	46	13,200	DW20B, MW20B, DW21B, DW23B, MW23B	24.9	75.5	33.9	227	60	47	925

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
9	4,880	5,360	5,630	5,870	6,165	6,350	7,180	8,040	15	9,110
12	5,595	6,150	6,460	6,735	7,070	7,290	8,240	9,225	17	10,455
17	7,325	8,050	8,455	8,815	9,260	9,540	10,785	12,075	23	13,685
23	8,510	9,350	9,820	10,240	10,755	11,080	12,530	14,025	29	15,895
29	9,555	10,500	11,025	11,500	12,075	12,445	14,070	15,750	36	17,850
35	10,375	11,400	11,970	12,485	13,110	13,510	15,275	17,100	44	19,380
41	11,195	12,300	12,915	13,470	14,145	14,575	16,480	18,450	51	20,910
46	12,010	13,200	13,860	14,455	15,180	15,640	17,690	19,800	58	22,440

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
650/75R34	40P2FV	TL	162D	23	10,500	DW20B, MW20B, DW21B, DW23B, MW23B	26.0	71.5	31.0	213	65	46	875

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
9	5,170	5,680	5,965	6,220	6,530	6,730	7,610	8,520	15	9,655
12	6,005	6,600	6,930	7,225	7,590	7,820	8,845	9,900	17	11,220
15	6,915	7,600	7,980	8,320	8,740	9,005	10,185	11,400	20	12,920
17	7,780	8,550	8,980	9,360	9,835	10,130	11,455	12,825	23	14,535
20	8,510	9,350	9,820	10,240	10,755	11,080	12,530	14,025	26	15,895
23	9,555	10,500	11,025	11,500	12,075	12,445	14,070	15,750	29	17,850

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
650/75R38	D246FW	TL	169A8/B	35	12,800	DW20B, MW20B, DW21B, DW23B, MW23B	25.9	76.2	34.8	231	76	47	925

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
						Inflation Pressure (psi)	6 mph (lbs)
9	6,000	6,420	6,660	8,040	9,000	15	10,200
12	6,950	7,435	7,715	9,315	10,425	17	11,815
15	7,850	8,400	8,715	10,520	11,775	20	13,345
20	9,900	10,595	10,990	13,265	14,850	26	16,830
23	10,700	11,450	11,875	14,340	16,050	29	18,190
29	12,000	12,840	13,320	16,080	18,000	36	20,400
32	12,300	13,160	13,655	16,480	18,450	41	20,910
35	12,800	13,695	14,210	17,150	19,200	44	21,760



LSW OPTIONS



FUEL ECONOMY



INCREASED TRACTION



IMPROVED PROFITABILITY



TIME SAVING



LOW SOIL COMPACTION



INCREASED PUNCTURE RESISTANCE



OPTITRAC



LSW OPTIONS



FUEL ECONOMY



INCREASED TRACTION



IMPROVED PROFITABILITY



TIME SAVING



LOW SOIL COMPACTION




INCREASED PUNCTURE RESISTANCE

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim			Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32" in)	RCI	SRI
650/85R38	40P4HA	TL	173D	35	14,300	DW20B, MW20B, DW21B, DW23B, MW23B			26.3	81.4	35.5	243	76	48	975
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service						
9	6,005	6,600	6,930	7,225	7,590	7,820	8,845	9,900	Inflation Pressure (psi)	6 mph (lbs)					
12	7,145	7,850	8,245	8,595	9,030	9,300	10,520	11,775	15	11,220					
15	8,010	8,800	9,240	9,635	10,120	10,430	11,790	13,200	17	13,345					
20	10,010	11,000	11,550	12,045	12,650	13,035	14,740	16,500	20	14,960					
23	10,920	12,000	12,600	13,140	13,800	14,220	16,080	18,000	26	18,700					
29	12,010	13,200	13,860	14,455	15,180	15,640	17,690	19,800	29	20,400					
32	12,650	13,900	14,595	15,220	15,985	16,470	18,625	20,850	36	22,440					
35	13,015	14,300	15,015	15,660	16,445	16,945	19,160	21,450	41	23,630					
									44	24,310					

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim			Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32" in)	RCI	SRI
650/85R42	D247DA	TL	174A8/B	35	14,800	DW20B, MW20B, DW21B, DW23B, MW23B			26.8	84.7	38.5	256	76	49	1,025
Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service									
9	6,950	7,435	7,715	9,315	10,425	Inflation Pressure (psi)	6 mph (lbs)								
12	8,050	8,615	8,935	10,785	12,075	15	11,815								
15	9,350	10,005	10,380	12,530	14,025	17	13,685								
20	11,700	12,520	12,985	15,680	17,550	20	15,895								
23	12,800	13,695	14,210	17,150	19,200	26	19,890								
29	13,900	14,875	15,430	18,625	20,850	29	21,760								
32	14,300	15,300	15,875	19,160	21,450	36	23,630								
35	14,800	15,835	16,430	19,830	22,200	41	24,310								
						44	25,160								

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim			Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32" in)	RCI	SRI
710/70R38	40P469	TL	171D	35	13,600	DW23B, MW23B, DW25B, MW25B			27.8	76.5	34.2	230	78	47	925
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service						
9	5,825	6,400	6,720	7,010	7,360	7,585	8,575	9,600	Inflation Pressure (psi)	6 mph (lbs)					
12	6,735	7,400	7,770	8,105	8,510	8,770	9,915	11,100	15	10,880					
15	7,780	8,550	8,980	9,360	9,835	10,130	11,455	12,825	17	12,580					
17	8,780	9,650	10,135	10,565	11,100	11,435	12,930	14,475	20	14,535					
20	9,735	10,700	11,235	11,715	12,305	12,680	14,340	16,050	23	16,405					
23	10,645	11,700	12,285	12,810	13,455	13,865	15,680	17,550	26	18,190					
26	11,195	12,300	12,915	13,470	14,145	14,575	16,480	18,450	29	19,890					
29	11,650	12,800	13,440	14,015	14,720	15,170	17,150	19,200	33	20,910					
32	12,010	13,200	13,860	14,455	15,180	15,640	17,690	19,800	36	21,760					
35	12,375	13,600	14,280	14,890	15,640	16,115	18,225	20,400	41	22,440					
									44	23,120					





Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
IF710/70R38CFO	F0PK69	TL	181D	41	18,200	DW23B, MW23B, DW25B, MW25B	29.2	76.8	33.6	229	78	47	925
Inflation Pressure (psi)		43 mph (lbs)		40 mph (lbs)		Cyclic Service							
		20 mph (lbs)		10 mph (lbs)									
12		8,010		8,800		11,440		13,640					
15		9,280		10,200		13,260		15,810					
17		10,375		11,400		14,820		17,670					
23		12,650		13,900		18,070		21,545					
29		13,830		15,200		19,760		23,560					
35		15,015		16,500		21,450		25,575					
38		15,560		17,100		22,230		26,505					
41		16,560		18,200		23,660		28,210					

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
710/70R42	40P491	TL	173D	35	14,300	DW23B, MW23B, DW25B, MW25B	27.7	80.5	36.3	243	78	48	975
710/70R42	40P691	TL	179D	46	17,100	DW23B, MW23B, DW25B, MW25B	27.5	81.1	36.6	245	78	48	975
Inflation Pressure (psi)		43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service			
										Inflation Pressure (psi)	6 mph (lbs)		
9	6,005	6,600	6,930	7,225	7,590	7,820	8,845	9,900		15	11,220		
12	7,145	7,850	8,245	8,595	9,030	9,300	10,520	11,775		17	13,345		
15	8,010	8,800	9,240	9,635	10,120	10,430	11,790	13,200		20	14,960		
20	10,010	11,000	11,550	12,045	12,650	13,035	14,740	16,500		26	18,700		
23	11,195	12,300	12,915	13,470	14,145	14,575	16,480	18,450		29	20,910		
29	12,375	13,600	14,280	14,890	15,640	16,115	18,225	20,400		36	23,120		
32	12,650	13,900	14,595	15,220	15,985	16,470	18,625	20,850		41	23,630		
35	13,015	14,300	15,015	15,660	16,445	16,945	19,160	21,450		44	24,310		
END OF 40P491													
38	13,830	15,200	15,960	16,645	17,480	18,010	20,370	22,800		48	25,840		
41	14,285	15,700	16,485	17,190	18,055	18,605	21,040	23,550		51	26,690		
44	15,015	16,500	17,325	18,070	18,975	19,555	22,110	24,750		55	28,050		
46	15,560	17,100	17,955	18,725	19,665	20,265	22,915	25,650		58	29,070		

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
IF710/70R42CFO	F0PH91	TL	179D	35	17,100	DW23B, MW23B, DW25B, MW25B	28.7	81.1	35.7	243	78	48	975
Inflation Pressure (psi)		43 mph (lbs)		40 mph (lbs)		Cyclic Service							
		20 mph (lbs)		10 mph (lbs)									
12		8,510		9,350		12,155		14,495					
15		9,735		10,700		13,910		16,585					
17		10,920		12,000		15,600		18,600					
20		12,010		13,200		17,160		20,460					
23		13,470		14,800		19,240		22,940					
29		14,650		16,100		20,930		24,955					
32		15,015		16,500		21,450		25,575					
35		15,560		17,100		22,230		26,505					





OPTITRAC



LSW OPTIONS



FUEL ECONOMY



INCREASED TRACTION



IMPROVED PROFITABILITY



TIME SAVING



LOW SOIL COMPACTION



INCREASED PUNCTURE RESISTANCE

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32" in)	RCI	SRI
LSW710/60R46	G0PM91	TL	186D	46	20,900	DW25B	28.0	80.9	36.5	244	78	48	975
				Inflation Pressure (psi)				Cyclic Service					
				43 mph (lbs)		40 mph (lbs)		20 mph (lbs)		10 mph (lbs)			
				12		8,510		10,465		12,480			
				15		9,735		11,830		14,105			
				17		10,920		13,650		16,275			
				20		12,375		14,820		17,670			
				23		13,470		16,640		19,840			
				26		14,285		17,680		21,080			
				29		15,015		18,070		21,545			
				32		15,560		19,240		22,940			
				35		16,015		19,760		23,560			
				38		17,015		20,930		24,955			
				41		17,565		21,450		25,575			
				44		18,565		22,230		26,505			
				46		19,020		22,880		27,280			

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32" in)	RCI	SRI												
710/75R42	40P4P9	TL	175D	35	15,200	DW21B, DW23B, DW24B, DW25B	28.0	85.0	38.7	257	78	49	1,025												
				Inflation Pressure (psi)				Cyclic Service																	
				43 mph (lbs)		40 mph (lbs)		30 mph (lbs)		25 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)		Inflation Pressure (psi)		6 mph (lbs)			
				9		6,505		7,150		7,510		7,830		8,225		8,475		9,580		10,725		15		12,155	
				12		7,510		8,250		8,665		9,035		9,490		9,775		11,055		12,375		17		14,025	
				15		8,510		9,350		9,820		10,240		10,755		11,080		12,530		14,025		20		15,895	
				20		10,645		11,700		12,285		12,810		13,455		13,865		15,680		17,550		26		19,890	
				23		12,010		13,200		13,860		14,455		15,180		15,640		17,690		19,800		29		22,440	
				29		13,015		14,300		15,015		15,660		16,445		16,945		19,160		21,450		36		24,310	
				32		13,470		14,800		15,540		16,205		17,020		17,540		19,830		22,200		41		25,160	
				35		13,830		15,200		15,960		16,645		17,480		18,010		20,370		22,800		44		25,840	

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32" in)	RCI	SRI
LSW750/45R30	G0PDSF	TL	161D	23	10,200	DW25B	28.5	56.1	30.8	167	57	41	700
				Inflation Pressure (psi)		43 mph (lbs)		40 mph (lbs)		Cyclic Service			
				12		6,005		6,600		20 mph (lbs)		10 mph (lbs)	
				15		6,735		7,400		7,385		8,805	
				17		7,510		8,250		8,320		9,920	
				23		9,280		10,200		9,295		11,085	
										11,440		13,640	

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32" in)	RCI	SRI
750/65R26	40P4N6	TL	166D	35	11,700	DW23B, DW24B, DW25B	30.2	63.9	28.3	192	78	--	775

See Next Page for the Load & Inflation Table



LSW OPTIONS



FUEL ECONOMY



INCREASED TRACTION



IMPROVED PROFITABILITY



TIME SAVING



LOW SOIL COMPACTION



INCREASED PUNCTURE RESISTANCE

40P4N6 LOAD & INFLATION TABLE										
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
9	4,880	5,360	5,630	5,870	6,165	6,350	7,180	8,040	15	9,110
12	5,825	6,400	6,720	7,010	7,360	7,585	8,575	9,600	17	10,880
15	6,505	7,150	7,510	7,830	8,225	8,475	9,580	10,725	20	12,155
20	8,010	8,800	9,240	9,635	10,120	10,430	11,790	13,200	26	14,960
23	8,780	9,650	10,135	10,565	11,100	11,435	12,930	14,475	29	16,405
29	9,735	10,700	11,235	11,715	12,305	12,680	14,340	16,050	36	18,190
32	10,010	11,000	11,550	12,045	12,650	13,035	14,740	16,500	41	18,700
35	10,645	11,700	12,285	12,810	13,455	13,865	15,680	17,550	44	19,890

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
VF750/65R26CFO	VOPHN6	TL	177D	35	16,100	DW25B, DW27B, DW28B	30.6	64.0	27.4	190	78	--	775

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	Cyclic Service	
			20 mph (lbs)	10 mph (lbs)
12	8,010	8,800	9,880	11,780
15	9,280	10,200	11,115	13,255
17	10,375	11,400	12,545	14,960
20	11,195	12,300	13,910	16,585
23	12,375	13,600	15,210	18,135
29	13,470	14,800	16,640	19,840
32	14,285	15,700	17,160	20,460
35	14,650	16,100	18,070	21,545

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
LSW750/60R30	GOPKN6	TL	180D	41	17,600	DW25B	28.7	65.1	27.6	192	78	--	775

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	Cyclic Service	
			20 mph (lbs)	10 mph (lbs)
12	7,780	8,550	9,295	11,085
15	8,780	9,650	10,725	12,790
17	9,735	10,700	12,155	14,495
23	12,010	13,200	14,820	17,670
29	13,470	14,800	16,640	19,840
35	14,285	15,700	17,680	21,080
38	15,015	16,500	18,590	22,165
41	16,015	17,600	19,240	22,940





OPTITRAC



LSW OPTIONS



FUEL ECONOMY



INCREASED TRACTION



IMPROVED PROFITABILITY



TIME SAVING



LOW SOIL COMPACTION



INCREASED PUNCTURE RESISTANCE

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim			Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
800/65R32	40P496	TL	172D	35	13,900	DW25B, DW27B, DH27, DH27B, DH27H, DH27HB			32.0	72.2	32.3	217	68	46	875
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service						
9	6,005	6,600	6,930	7,225	7,590	7,820	8,845	9,900	Inflation Pressure (psi)	6 mph (lbs)					
12	6,915	7,600	7,980	8,320	8,740	9,005	10,185	11,400	15	11,220					
15	8,010	8,800	9,240	9,635	10,120	10,430	11,790	13,200	17	12,920					
20	9,735	10,700	11,235	11,715	12,305	12,680	14,340	16,050	20	14,960					
23	10,920	12,000	12,600	13,140	13,800	14,220	16,080	18,000	26	18,190					
29	11,650	12,800	13,440	14,015	14,720	15,170	17,150	19,200	29	20,400					
32	12,375	13,600	14,280	14,890	15,640	16,115	18,225	20,400	36	21,760					
35	12,650	13,900	14,595	15,220	15,985	16,470	18,625	20,850	41	23,120					
									44	23,630					

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim			Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
LSW800/50R42	G0PH96	TL	180D	35	17,600	DW28B			30.4	72.6	32.0	217	68	46	875
Inflation Pressure (psi)		43 mph (lbs)		40 mph (lbs)		Cyclic Service									
12		8,510		9,350		20 mph (lbs)					10 mph (lbs)				
15		9,555		10,500		10,205					12,170				
17		10,920		12,000		11,830					14,105				
20		12,010		13,200		13,260					15,810				
23		13,015		14,300		14,820					17,670				
29		14,650		16,100		15,990					19,065				
32		15,015		16,500		18,070					21,545				
35		16,015		17,600		18,590					22,165				
						19,240					22,940				

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim			Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
800/70R38	40P2M8	TL	173D	23	14,300	DW25B, MW25B, DW27B, MW27B, MW28B			32.3	80.4	34.8	239	77	48	975
800/70R38	40P5M8	TL	181D	41	18,200	DW25B, MW25B, DW27B, MW27B, MW28B			32.8	80.8	35.8	242	77	48	975
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service						
9	6,915	7,600	7,980	8,320	8,740	9,005	10,185	11,400	Inflation Pressure (psi)	6 mph (lbs)					
12	8,280	9,100	9,555	9,965	10,465	10,785	12,195	13,650	15	12,920					
15	9,280	10,200	10,710	11,170	11,730	12,085	13,670	15,300	17	15,470					
17	10,645	11,700	12,285	12,810	13,455	13,865	15,680	17,550	20	17,340					
20	11,650	12,800	13,440	14,015	14,720	15,170	17,150	19,200	23	19,890					
23	13,015	14,300	15,015	15,660	16,445	16,945	19,160	21,450	26	21,760					
END OF 40P2M8															
26	13,470	14,800	15,540	16,205	17,020	17,540	19,830	22,200	29	24,310					
29	14,285	15,700	16,485	17,190	18,055	18,605	21,040	23,550	33	25,160					
32	14,650	16,100	16,905	17,630	18,515	19,080	21,575	24,150	36	26,690					
35	15,015	16,500	17,325	18,070	18,975	19,555	22,110	24,750	41	27,370					
38	15,560	17,100	17,955	18,725	19,665	20,265	22,915	25,650	44	28,050					
41	16,560	18,200	19,110	19,930	20,930	21,565	24,390	27,300	48	29,070					
									51	30,940					



Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
IF800/70R38CFO	FOPMM8	TL	190D	46	23,400	DW27B, MW27B, MW28B	32.8	81.0	35.2	241	77	48	975
Inflation Pressure (psi)		43 mph (lbs)			40 mph (lbs)			Cyclic Service					
		20 mph (lbs)			10 mph (lbs)								
12		9,735			10,700			13,910		16,585			
15		11,195			12,300			15,990		19,065			
17		12,650			13,900			18,070		21,545			
23		15,560			17,100			22,230		26,505			
29		17,015			18,700			24,310		28,985			
35		18,020			19,800			25,740		30,690			
41		19,565			21,500			27,950		33,325			
46		21,295			23,400			30,420		36,270			

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
LSW800/55R46	GOPDM8	TL	178D	23	16,500	DW28B	31.0	81.2	35.3	242	77	48	975
LSW800/55R46	GOPMM8	TL	190D	46	23,400	DW28B	30.9	81.4	36.9	246	77	48	975
Inflation Pressure (psi)		43 mph (lbs)			40 mph (lbs)			Cyclic Service					
		20 mph (lbs)			10 mph (lbs)								
12		9,555			10,500			11,830		14,105			
15		10,920			12,000			13,260		15,810			
17		12,375			13,600			15,210		18,135			
20		13,470			14,800			16,640		19,840			
23		15,015			16,500			18,070		21,545			
END OF GOPDM8													
26		16,015			17,600			19,240		22,940			
29		16,560			18,200			20,410		24,335			
32		17,565			19,300			20,930		24,955			
35		18,020			19,800			22,230		26,505			
38		18,565			20,400			22,880		27,280			
41		19,565			21,500			24,310		28,985			
44		20,655			22,700			25,090		29,915			
46		21,295			23,400			25,740		30,690			

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
LSW850/55R30	GOPMT3	TL	186D	46	20,900	DW30B	34.0	65.1	29.1	196	69	44	800
Inflation Pressure (psi)		43 mph (lbs)			40 mph (lbs)			Cyclic Service					
		20 mph (lbs)			10 mph (lbs)								
12		8,510			9,350			10,465		12,480			
15		9,735			10,700			12,155		14,495			
17		11,195			12,300			13,650		16,275			
23		13,470			14,800			16,640		19,840			
29		15,015			16,500			18,590		22,165			
35		16,015			17,600			19,760		23,560			
41		18,020			19,800			21,450		25,575			
46		19,020			20,900			23,660		28,210			





OPTITRAC



LSW OPTIONS



FUEL ECONOMY



INCREASED TRACTION



IMPROVED PROFITABILITY



TIME SAVING



LOW SOIL COMPACTION



INCREASED PUNCTURE RESISTANCE

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
IF850/60R26CFO	4HP5T3	TL	179A8	41	17,100	DW30B	35.6	64.7	27.8	192	69	44	800
				Inflation Pressure (psi)				Cyclic Service					
				30 mph (lbs)		25 mph (lbs)		20 mph (lbs)		10 mph (lbs)			
				12		7,510		8,250		10,725		12,790	
				15		8,780		9,650		12,545		14,960	
				17		9,735		10,700		13,910		16,585	
				23		12,010		13,200		17,160		20,460	
				29		13,015		14,300		18,590		22,165	
				35		14,285		15,700		20,410		24,335	
				41		15,560		17,100		22,230		26,505	

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
IF850/75R42CFO	F0PDB2	TL	186D	23	20,900	DW28B, DW30B	34.2	89.9	34.8	257	87	50	1,125
				Inflation Pressure (psi)				Cyclic Service					
				43 mph (lbs)		40 mph (lbs)		20 mph (lbs)		10 mph (lbs)			
				12		12,010		13,200		17,160		20,460	
				15		13,830		15,200		19,760		23,560	
				17		15,560		17,100		22,230		26,505	
				20		17,015		18,700		24,310		28,985	
				23		19,020		20,900		27,170		32,395	

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
850/80R38	4T37G1	TL	180A8/B	23	17,600	DW27B, MW28B	33.5	89.0	39.1	265	87	50	1,125
				Inflation Pressure (psi)				Cyclic Service					
				30 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)	
				9		9,650		10,325		10,710		12,930	
				12		11,400		12,200		12,655		15,275	
				15		12,800		13,695		14,210		17,150	
				17		14,300		15,300		15,875		19,160	
				20		16,100		17,225		17,870		21,575	
				23		17,600		18,830		19,535		23,585	
										Cyclic Service			
										Inflation Pressure (psi)		6 mph (lbs)	
										15		16,405	
										17		19,380	
										20		21,760	
										23		24,310	
										26		27,370	
										29		29,920	

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
LSW900/50R46	G0PDB1	TL	181D	23	18,200	DW30B	32.9	81.4	35.3	242	71	48	975
LSW900/50R46	G0PKB1	TL	191D	41	24,000	DW30B	32.8	81.8	36.8	247	71	48	975

See Next Page for the Load & Inflation Table



LSW OPTIONS



FUEL ECONOMY



INCREASED TRACTION



IMPROVED PROFITABILITY



TIME SAVING



LOW SOIL COMPACTION



INCREASED PUNCTURE RESISTANCE




GOPDB1 & GOPKB1 LOAD & INFLATION TABLE				
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	Cyclic Service	
			20 mph (lbs)	10 mph (lbs)
12	10,645	11,700	12,870	15,345
15	12,010	13,200	14,820	17,670
17	13,470	14,800	16,640	19,840
20	15,015	16,500	18,590	22,165
23	16,560	18,200	20,410	24,335
END OF GOPDB1				
26	17,565	19,300	21,450	25,575
29	18,565	20,400	22,230	26,505
32	19,020	20,900	23,660	28,210
35	19,565	21,500	24,310	28,985
38	20,655	22,700	25,090	29,915
41	21,840	24,000	26,520	31,620

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
900/60R32	4T34C2	TL	176A8/B	35	15,700	DW27B, DH27, DH27B, DH27H, DW28B, DW30B, DW31B, DH31H, DH31HB	35.2	76.0	34.2	229	71	46	925
900/60R32	4T36C2	TL	185A8/B	58	20,400	DW27B, DH27, DH27B, DH27H, DW28B, DW30B, DW31B, DH31H, DH31HB	35.7	75.5	34.3	228	71	46	925

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
						Inflation Pressure (psi)	6 mph (lbs)
9	7,150	7,650	7,935	9,580	10,725	15	12,155
12	8,250	8,830	9,160	11,055	12,375	17	14,025
15	9,350	10,005	10,380	12,530	14,025	20	15,895
20	11,700	12,520	12,985	15,680	17,550	26	19,890
23	12,800	13,695	14,210	17,150	19,200	29	21,760
29	14,300	15,300	15,875	19,160	21,450	36	24,310
32	15,200	16,265	16,870	20,370	22,800	41	25,840
35	15,700	16,800	17,425	21,040	23,550	44	26,690
END OF 4T34C2							
38	16,100	17,225	17,870	21,575	24,150	48	27,370
41	17,100	18,295	18,980	22,915	25,650	51	29,070
44	17,600	18,830	19,535	23,585	26,400	55	29,920
46	18,200	19,475	20,200	24,390	27,300	58	30,940
49	18,700	20,010	20,755	25,060	28,050	61	31,790
52	19,300	20,650	21,425	25,860	28,950	64	32,810
55	19,800	21,185	21,980	26,530	29,700	67	33,660
58	20,400	21,830	22,645	27,335	30,600	70	34,680

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
IF900/60R32CFO	4HP7C2	TL	188A8	46	22,000	DW30B, DW31B, DH31H, DH31HB	36.8	75.9	33.8	228	71	46	925

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	Cyclic Service	
			20 mph (lbs)	10 mph (lbs)
12	9,010	9,900	12,870	15,345
15	10,375	11,400	14,820	17,670
17	11,650	12,800	16,640	19,840
23	14,285	15,700	20,410	24,335
29	15,560	17,100	22,230	26,505
35	17,015	18,700	24,310	28,985
41	18,565	20,400	26,520	31,620
46	20,020	22,000	28,600	34,100



OPTITRAC



LSW OPTIONS



FUEL ECONOMY



INCREASED TRACTION



IMPROVED PROFITABILITY



TIME SAVING



LOW SOIL COMPACTION




INCREASED PUNCTURE RESISTANCE

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
LSW900/60R42	GOPPC4	TL	200D	52	30,900	DW30B	35.5	85.3	38.1	257	71	49	1,025
				Inflation Pressure (psi)				Cyclic Service					
				43 mph (lbs)		40 mph (lbs)		20 mph (lbs)		10 mph (lbs)			
				12		11,650		14,300		17,050			
				17		15,015		18,590		22,165			
				23		18,565		22,880		27,280			
				29		20,655		25,090		29,915			
				35		22,475		27,170		32,395			
				41		24,390		29,510		35,185			
				46		26,480		32,110		38,285			
				52		28,120		33,800		40,300			

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
LSW1000/45R32	GOPHFE	TL	184D	35	19,800	DH36HB, 36.00VA	39.0	67.2	27.9	197	66	44	825
				Inflation Pressure (psi)				Cyclic Service					
				43 mph (lbs)		40 mph (lbs)		20 mph (lbs)		10 mph (lbs)			
				12		9,555		11,830		14,105			
				15		10,920		13,260		15,810			
				17		12,375		15,210		18,135			
				20		13,470		16,640		19,840			
				23		15,015		18,590		22,165			
				26		16,015		19,240		22,940			
				29		16,560		20,410		24,335			
				32		17,565		21,450		25,575			
				35		18,020		22,230		26,505			

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
LSW1100/35R32	GOPD11	TL	175D	23	15,200	DH36HB, DH38HB	40.4	62.9	27.2	187	72	43	750
				Inflation Pressure (psi)				Cyclic Service					
				43 mph (lbs)		40 mph (lbs)		20 mph (lbs)		10 mph (lbs)			
				12		8,780		10,725		12,790			
				15		10,010		12,545		14,960			
				17		11,195		13,910		16,585			
				20		12,650		15,600		18,600			
				23		13,830		17,160		20,460			

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
LSW1100/45R46	GOPB16	TL	181D	17	18,200	DW38HB	40.3	85.3	37.8	256	73	49	1,025
LSW1100/45R46	GOPM16	TL	201D	46	32,000	DW38HB	40.7	85.3	37.8	256	73	49	1,025



LSW OPTIONS



FUEL ECONOMY



INCREASED TRACTION



IMPROVED PROFITABILITY



TIME SAVING



LOW SOIL COMPACTION




INCREASED PUNCTURE RESISTANCE



GOPB16 & G0PM16 LOAD & INFLATION TABLE				
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	Cyclic Service	
			20 mph (lbs)	10 mph (lbs)
12	13,015	14,300	15,990	19,065
15	15,015	16,500	18,070	21,545
17	16,560	18,200	20,410	24,335
END OF GOPB16				
20	18,565	20,400	22,880	27,280
23	20,655	22,700	25,090	29,915
26	21,840	24,000	26,520	31,620
29	22,475	24,700	27,950	33,325
32	23,660	26,000	28,600	34,100
35	24,390	26,800	30,420	36,270
38	25,755	28,300	31,200	37,200
41	26,480	29,100	33,020	39,370
44	28,120	30,900	33,800	40,300
46	29,120	32,000	35,880	42,780

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
LSW1250/35R46	GOPPR6	TL	202D	52	33,100	DH44HB	46.6	80.7	37.1	246	83	48	1,025
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	Cyclic Service										
12	12,650	13,900	15,600	18,600									
15	14,650	16,100	18,070	21,545									
20	18,020	19,800	22,230	26,505									
23	20,020	22,000	24,310	28,985									
29	22,475	24,700	27,170	32,395									
32	23,115	25,400	28,600	34,100									
35	24,390	26,800	29,510	35,185									
41	26,480	29,100	32,110	38,285									
44	27,300	30,000	33,800	40,300									
46	28,120	30,900	34,840	41,540									
49	29,120	32,000	35,880	42,780									
52	30,120	33,100	36,790	43,865									

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
IF1250/50R32CFO	F0PMM9	TL	201D	46	32,000	DW44B, DH44, DH44B, DH44H, DH44HB, 44DWM	50.4	81.8	35.9	244	83	48	975
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	Cyclic Service										
12	13,015	14,300	18,590	22,165									
15	14,650	16,100	20,930	24,955									
17	16,560	18,200	23,660	28,210									
23	20,020	22,000	28,600	34,100									
29	22,475	24,700	32,110	38,285									
35	24,390	26,800	34,840	41,540									
41	26,480	29,100	37,830	45,105									
46	29,120	32,000	41,600	49,600									



OPTITRAC



LSW OPTIONS



FUEL ECONOMY



INCREASED TRACTION



IMPROVED PROFITABILITY



TIME SAVING



LOW SOIL COMPACTION



INCREASED PUNCTURE RESISTANCE

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
LSW1400/30R46	GOPMS6	TL	201D	46	32,000	DH50HB	52.9	83.0	36.9	249	83	48	1,025
				Inflation Pressure (psi)				Cyclic Service					
								20 mph (lbs)				10 mph (lbs)	
				12		43 mph (lbs)		15,990				19,065	
				17		40 mph (lbs)		20,930				24,955	
				23				25,740				30,690	
				29				28,600				34,100	
				35				30,420				36,270	
				41				33,800				40,300	
				46				35,880				42,780	



GOODYEAR OPTITERRA R-1W

- New radial shape to improve performance
- New tread design for better wear and traction
- All the lug features of the Goodyear Optitrac
- Increased lug lacing for high load durability



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
1050/50R32	XPT543	TL	178A8/B	35	16,500	36.00VA	42.0	74.8	34.0	227	85	--	875
				Inflation Pressure (psi)				10 mph (lbs)				5 mph (lbs)	
				12		30 mph (lbs)		11,790				13,200	
				15				13,670				15,300	
				17				15,275				17,100	
				23				18,625				20,850	
				26				19,830				22,200	
				29				21,040				23,550	
				32				21,575				24,150	
				35				22,110				24,750	



GOODYEAR CUSTOM FLO GRIP R-2


Key Benefits

- New radial shape to improve performance
- New deep tread design for better wear and traction in mud
- Will handle speeds to 30 mph
- Increased lug bracing for high load durability



Application(s)





CUSTOM FLO GRIP



LSW OPTIONS



INCREASED TRACTION



INCREASED PUNCTURE RESISTANCE



ROADABILITY



TIME SAVING


Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
VF580/85R42CFO	VFGKD4	TL	183A8	41	19,300	W18A, DW18A, DW18B, DW18L, DD18, DD18L, DW20B, MW20B	23.4	83.2	36.6	249	108	48	1,025
				Inflation Pressure (psi)		30 mph (lbs)		Cyclic Service					
						20 mph (lbs)		10 mph (lbs)					
				12		9,350		10,465		12,480			
				15		10,700		12,155		14,495			
				17		12,000		13,650		16,275			
				23		14,800		16,640		19,840			
				29		16,500		18,070		21,545			
				32		17,100		18,590		22,165			
				35		17,600		19,240		22,940			
				41		19,300		21,450		25,575			

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
VF750/65R26CFO	VFGHN6	TL	177A8	35	16,100	DW25B, DW27B, DW28B	29.2	66.4	29.0	198	108	--	800
				Inflation Pressure (psi)		30 mph (lbs)		25 mph (lbs)		Cyclic Service			
								20 mph (lbs)		10 mph (lbs)			
				12		8,010		8,800		9,880		11,780	
				15		9,280		10,200		11,115		13,255	
				17		10,375		11,400		12,545		14,960	
				20		11,195		12,300		13,910		16,585	
				23		12,375		13,600		15,210		18,135	
				26		13,015		14,300		15,990		19,065	
				29		13,470		14,800		16,640		19,840	
				35		14,650		16,100		18,070		21,545	

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
LSW750/60R30	GFGKN6	TL	180B	41	17,600	DW25B	28.3	67.0	29.4	200	108	--	800
				Inflation Pressure (psi)		30 mph (lbs)		Cyclic Service					
								20 mph (lbs)		10 mph (lbs)			
				12		8,550		9,295		11,085			
				15		9,650		10,725		12,790			
				17		10,700		12,155		14,495			
				23		13,200		14,820		17,670			
				29		14,800		16,640		19,840			
				32		15,200		17,160		20,460			
				35		15,700		17,680		21,080			
				41		17,600		19,240		22,940			

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
LSW850/50R30	GFGRT6	TL	187B	58	21,500	DW30B	33.4	65.4	N/A	N/A	110	44	775

See Next Page for the Load & Inflation Table



GFGRT6 LOAD & INFLATION TABLE

Inflation Pressure (psi)	30 mph (lbs)	Cyclic Service	
		20 mph (lbs)	10 mph (lbs)
17	11,000	12,545	14,960
23	13,600	15,210	18,135
29	15,200	16,640	19,840
35	16,500	18,070	21,545
41	18,200	19,760	23,560
46	19,300	21,450	25,575
52	20,400	22,880	27,280
58	21,500	24,310	28,985



LSW OPTIONS



INCREASED TRACTION



INCREASED PUNCTURE RESISTANCE



ROADABILITY



TIME SAVING

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
IF850/55R26CFO	FFGMT6	TL	179A8	46	17,100	DW30B	34.0	65.3	26.7	190	110	44	825

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	Cyclic Service	
			20 mph (lbs)	10 mph (lbs)
12	6,915	7,600	9,880	11,780
17	9,010	9,900	12,870	15,345
23	10,920	12,000	15,600	18,600
29	12,375	13,600	17,680	21,080
35	13,015	14,300	18,590	22,165
38	13,830	15,200	19,760	23,560
41	14,285	15,700	20,410	24,335
46	15,560	17,100	22,230	26,505


Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
IF900/65R32CFO	FFGMY1	TL	191A8	46	24,000	DW30B, DW31B, DH31H, DH31HB	36.0	80.4	36.0	242	111	47	975

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	Cyclic Service	
			20 mph (lbs)	10 mph (lbs)
12	10,010	11,000	14,300	17,050
15	11,650	12,800	16,640	19,840
17	13,015	14,300	18,590	22,165
23	15,015	16,500	21,450	25,575
29	17,015	18,700	24,310	28,985
35	18,565	20,400	26,520	31,620
41	20,020	22,000	28,600	34,100
46	21,840	24,000	31,200	37,200

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
LSW900/50R42	GFGMY1	TL	192B	46	24,700	DW30B	34.3	80.4	36.2	243	111	47	975

See Next Page for the Load & Inflation Table





CUSTOM FLO GRIP



LSW OPTIONS



INCREASED TRACTION



INCREASED PUNCTURE RESISTANCE



ROADABILITY



TIME SAVING

GFGMY1 LOAD & INFLATION TABLE

Inflation Pressure (psi)	30 mph (lbs)	Cyclic Service	
		20 mph (lbs)	10 mph (lbs)
12	11,000	12,155	14,495
15	12,800	13,910	16,585
17	14,300	15,600	18,600
23	17,600	19,240	22,940
29	19,300	21,450	25,575
35	20,900	22,880	27,280
41	22,700	25,090	29,915
46	24,700	27,170	32,395

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
LSW1250/35R46	GFGHR6	TL	195B	35	26,800	DH44HB	47.3	84.5	37.5	254	116	48	1,025

Inflation Pressure (psi)	30 mph (lbs)	Cyclic Service	
		20 mph (lbs)	10 mph (lbs)
12	13,900	15,600	18,600
17	18,200	20,410	24,335
20	19,800	22,230	26,505
23	22,000	24,310	28,985
26	23,400	25,740	30,690
29	24,700	27,170	32,395
32	25,400	28,600	34,100
35	26,800	29,510	35,185





GOODYEAR SPECIAL SURE GRIP TD8 RADIAL R-2

- Twice the tread depth of conventional R-1 tires
- Extra bite in soft, moist soil provided by open-faced tread design
- Extra lug bracing provides durability and strength



Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
320/90R46	4TD7V8	TL	148A8/B	52	6,950	W9, W10, W10A, DW10A, W11	12.6	70.8	32.6	213	86	45	875

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
						Inflation Pressure (psi)	6 mph (lbs)
32	5,360	5,735	5,950	7,180	8,040	41	9,110
35	5,520	5,905	6,125	7,395	8,280	44	9,385
38	5,840	6,250	6,480	7,825	8,760	48	9,930
41	6,150	6,580	6,825	8,240	9,225	51	10,455
44	6,400	6,850	7,105	8,575	9,600	55	10,880
46	6,600	7,060	7,325	8,845	9,900	58	11,220
49	6,800	7,275	7,550	9,110	10,200	61	11,560
52	6,950	7,435	7,715	9,315	10,425	64	11,815

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
340/85R46	4TD4H1	TL	140A8/B	29	5,520	W10A, DW10A, W11, W12, W12A	13.6	70.8	32.8	213	84	45	875

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
						Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	2,000	2,140	2,220	2,680	3,000	12	3,400
9	2,760	2,955	3,065	3,700	4,140	15	4,690
12	3,200	3,425	3,550	4,290	4,800	17	5,440
15	3,640	3,895	4,040	4,880	5,460	20	6,190
17	4,080	4,365	4,530	5,465	6,120	23	6,935
23	4,940	5,285	5,485	6,620	7,410	29	8,400
26	5,200	5,565	5,770	6,970	7,800	33	8,840
29	5,520	5,905	6,125	7,395	8,280	36	9,385

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
420/85R28	4TD448	TL	139A8/B	23	5,360	W12, W13, W14L, W15L	17.4	58.0	25.9	174	86	41	700

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
						Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	2,175	2,325	2,415	2,915	3,265	12	3,700
9	2,910	3,115	3,230	3,900	4,365	15	4,945
12	3,420	3,660	3,795	4,585	5,130	17	5,815
15	3,860	4,130	4,285	5,170	5,790	20	6,560
17	4,400	4,710	4,885	5,895	6,600	23	7,480
20	4,940	5,285	5,485	6,620	7,410	26	8,400
23	5,360	5,735	5,950	7,180	8,040	29	9,110





SPECIAL SURE GRIP TD8 RADIAL

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
420/90R30	4TD479	TL	142A8/B	23	5,840	W12, W13, DW13, DW13A, W14L, DW14A, W15L, DW15A	17.2	59.0	26.4	178	86	42	750
Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service							
						Inflation Pressure (psi)	6 mph (lbs)						
6 (Duals)	2,360	2,525	2,620	3,160	3,540	12	4,010						
9	3,200	3,425	3,550	4,290	4,800	15	5,440						
12	3,740	4,000	4,150	5,010	5,610	17	6,360						
15	4,180	4,475	4,640	5,600	6,270	20	7,105						
17	4,800	5,135	5,330	6,430	7,200	23	8,160						
20	5,360	5,735	5,950	7,180	8,040	26	9,110						
23	5,840	6,250	6,480	7,825	8,760	29	9,930						

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
480/70R34	4TD6M5	TL	155A8/B	46	8,550	W14L, W15A, W15L, DW15A, W16A, W16L, DW16A	17.7	63.2	29.2	193	91	43	775
Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service							
						Inflation Pressure (psi)	6 mph (lbs)						
29	6,600	7,060	7,325	8,845	9,900	36	11,220						
32	6,950	7,435	7,715	9,315	10,425	41	11,815						
35	7,150	7,650	7,935	9,580	10,725	44	12,155						
38	7,400	7,920	8,215	9,915	11,100	48	12,580						
41	7,850	8,400	8,715	10,520	11,775	51	13,345						
44	8,050	8,615	8,935	10,785	12,075	55	13,685						
46	8,550	9,150	9,490	11,455	12,825	58	14,535						

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
480/80R38	4TD477	TL	149A8/B	23	7,150	W14L, DW14L, W15A, W15L, DW15L, W16A, W16L, DW16A, DW16L, DD16	18.2	71.1	31.8	214	99	45	875
Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service							
						Inflation Pressure (psi)	6 mph (lbs)						
6 (Duals)	2,905	3,110	3,225	3,895	4,360	12	4,940						
9	3,960	4,235	4,395	5,305	5,940	15	6,730						
12	4,540	4,860	5,040	6,085	6,810	17	7,720						
15	5,200	5,565	5,770	6,970	7,800	20	8,840						
17	5,840	6,250	6,480	7,825	8,760	23	9,930						
20	6,600	7,060	7,325	8,845	9,900	26	11,220						
23	7,150	7,650	7,935	9,580	10,725	29	12,155						

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
480/80R42	4TD442	TL	151A8/B	23	7,600	W14L, DW14L, W15L, DW15L, W16A, W16L, DW16A, DW16L, DD16	18.4	74.9	33.8	226	92	46	925

See Next Page for the Load & Inflation Table



4TD442 LOAD & INFLATION TABLE							
Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
						Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	3,010	3,220	3,340	4,035	4,515	12	5,115
9	4,080	4,365	4,530	5,465	6,120	15	6,935
12	4,800	5,135	5,330	6,430	7,200	17	8,160
15	5,520	5,905	6,125	7,395	8,280	20	9,385
17	6,150	6,580	6,825	8,240	9,225	23	10,455
20	6,950	7,435	7,715	9,315	10,425	26	11,815
23	7,600	8,130	8,435	10,185	11,400	29	12,920

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
480/80R46	4TD547	TL	158A8/B	35	9,350	W14L, DW14L, W15L, DW15L, W16A, W16L, DW16A, DW16L, DD16	18.1	77.3	35.2	234	92	--	975

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
						Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	3,205	3,430	3,560	4,295	4,810	12	5,450
12	5,080	5,435	5,640	6,805	7,620	17	8,635
17	6,400	6,850	7,105	8,575	9,600	23	10,880
23	7,850	8,400	8,715	10,520	11,775	29	13,345
26	8,250	8,830	9,160	11,055	12,375	33	14,025
29	8,550	9,150	9,490	11,455	12,825	36	14,535
32	9,100	9,735	10,100	12,195	13,650	41	15,470
35	9,350	10,005	10,380	12,530	14,025	44	15,895

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
480/85R30	4TD450	TL	147A8/B	23	6,800	W14L, DW14A, W15L, DW15A, W16L, DW16A	18.2	63.0	28.3	190	91	--	775

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
						Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	2,710	2,900	3,010	3,630	4,065	12	4,605
9	3,740	4,000	4,150	5,010	5,610	15	6,360
12	4,300	4,600	4,775	5,760	6,450	17	7,310
15	4,940	5,285	5,485	6,620	7,410	20	8,400
17	5,520	5,905	6,125	7,395	8,280	23	9,385
20	6,150	6,580	6,825	8,240	9,225	26	10,455
23	6,800	7,275	7,550	9,110	10,200	29	11,560

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
520/85R38	4TD589	TL	155A8/B	23	8,550	W16A, DW16A, DD16, W18A, DW18A, DD18	21.7	74.5	33.6	222	108	46	--

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
						Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	3,395	3,635	3,770	4,550	5,095	12	5,770
9	4,680	5,010	5,195	6,270	7,020	15	7,955
12	5,520	5,905	6,125	7,395	8,280	17	9,385
15	6,150	6,580	6,825	8,240	9,225	20	10,455
17	6,950	7,435	7,715	9,315	10,425	23	11,815
20	7,850	8,400	8,715	10,520	11,775	26	13,345
23	8,550	9,150	9,490	11,455	12,825	29	14,535



SPECIAL SURE GRIP TD8 RADIAL

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
520/85R42	4TD452	TL	157A8/B	23	9,100	W15L, W16A, W16L, DW16A, DW16L, DD16, DD16L, W18A, W18L, DW18A, DW18B , DD18, DD18L	20.3	77.9	35.7	237	98	47	975
520/85R42	4TD652	TL	162A8/B	35	10,500	W15L, W16A, W16L, DW16A, DW16L, DD16, DD16L, W18A, W18L, DW18A, DW18B , DD18, DD18L	19.7	77.6	35.9	237	98	47	975
Inflation Pressure (psi)						Cyclic Service							
30 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)		Inflation Pressure (psi)		6 mph (lbs)	
6 (Duals)		3,590		3,840		3,985		4,810		12		6,105	
9		4,940		5,285		5,485		6,620		15		8,400	
12		5,680		6,080		6,305		7,610		17		9,655	
15		6,600		7,060		7,325		8,845		20		11,220	
17		7,400		7,920		8,215		9,915		23		12,580	
20		8,250		8,830		9,160		11,055		26		14,025	
23		9,100		9,735		10,100		12,195		29		15,470	
END OF 4TD452													
26		9,350		10,005		10,380		12,530		33		15,895	
29		9,900		10,595		10,990		13,265		36		16,830	
32		10,200		10,915		11,320		13,670		41		17,340	
35		10,500		11,235		11,655		14,070		44		17,850	

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
IF520/85R42CFO	FTD752	TL	169A8/B	35	12,800	W16A, DW16A, DD16, W18A, DW18A, DW18B, DD18	20.6	77.4	34.7	233	98	47	975
Inflation Pressure (psi)				Cyclic Service									
30 mph (lbs)		Duals		20 mph (lbs)		Duals		10 mph (lbs)		Duals			
6 (Duals)		--		4,345		--		5,650		6,740			
9		5,840		5,140		7,590		6,680		7,965			
12		6,950		6,115		9,035		7,950		9,480			
17		8,800		7,745		11,440		10,065		12,005			
23		10,700		9,415		13,910		12,240		14,595			
29		11,700		10,295		15,210		13,385		15,960			
32		12,300		10,825		15,990		14,070		16,775			
35		12,800		11,265		16,640		14,645		17,460			

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
520/85R46	4TD771	TL	158A8/B	23	9,350	W15L, W16A , W16L, DW16L, DD16, DD16L, W18A, W18L, DW18B, DD18L	19.8	81.5	36.8	246	108	48	1,025
520/85R46	4TD971	TL	169A8/B	46	12,800	W15L, W16A , W16L, DW16L, DD16, DD16L, W18A, W18L, DW18B, DD18L	19.8	82.0	37.5	249	108	48	1,025

See Next Page for the Load & Inflation Table



4TD771 & 4TD971 LOAD & INFLATION TABLE							
Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
						Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	3,785	4,050	4,200	5,070	5,680	12	6,435
9	5,080	5,435	5,640	6,805	7,620	15	8,635
12	6,000	6,420	6,660	8,040	9,000	17	10,200
15	6,800	7,275	7,550	9,110	10,200	20	11,560
17	7,600	8,130	8,435	10,185	11,400	23	12,920
20	8,550	9,150	9,490	11,455	12,825	26	14,535
23	9,350	10,005	10,380	12,530	14,025	29	15,895
END OF 4TD771							
26	9,900	10,595	10,990	13,265	14,850	33	16,830
29	10,200	10,915	11,320	13,670	15,300	36	17,340
32	10,700	11,450	11,875	14,340	16,050	41	18,190
35	11,000	11,770	12,210	14,740	16,500	44	18,700
38	11,400	12,200	12,655	15,275	17,100	48	19,380
41	12,000	12,840	13,320	16,080	18,000	51	20,400
44	12,300	13,160	13,655	16,480	18,450	55	20,910
46	12,800	13,695	14,210	17,150	19,200	58	21,760





GOODYEAR SPECIAL SURE GRIP TD8 R-2

- Twice the tread depth of conventional R-1 tires
- Extra bite in soft, moist soil provided by open-faced tread design
- Extra lug bracing provides durability and strength



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
14.9-24	4D8634	TL	6	20	3,000	W11, DW11, W12, DW12, W13, DW13, DW13L	15.7	52.6	24.4	158	88	--	600

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12	2,000	2,200	2,355	2,440	2,950	3,300	16	3,740	4,115
14	2,185	2,400	2,570	2,665	3,215	3,600	18	4,080	4,490
16	2,365	2,600	2,780	2,885	3,485	3,900	21	4,420	4,860
18	2,575	2,830	3,030	3,140	3,790	4,245	23	4,810	5,290
20	2,730	3,000	3,210	3,330	4,020	4,500	26	5,100	5,610

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
18.4-38	4D8877	TL	8	20	5,360	W15L, W16A, DD16	18.7	71.3	33.1	214	99	--	875

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12	3,605	3,960	4,235	4,395	5,305	5,940	16	6,730	7,405
14	4,005	4,400	4,710	4,885	5,895	6,600	18	7,480	8,230
16	4,260	4,680	5,010	5,195	6,270	7,020	21	7,955	8,750
18	4,625	5,080	5,435	5,640	6,805	7,620	23	8,635	9,500
20	4,880	5,360	5,735	5,950	7,180	8,040	26	9,110	10,025

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
20.8-38	4D8889	TL	8	18	6,150	W18A, DW18A, DD18	20.8	73.8	33.5	220	108	--	925

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12	4,370	4,800	5,135	5,330	6,430	7,200	16	8,160	8,975
14	4,880	5,360	5,735	5,950	7,180	8,040	18	9,110	10,025
16	5,170	5,680	6,080	6,305	7,610	8,520	21	9,655	10,620
18	5,595	6,150	6,580	6,825	8,240	9,225	23	10,455	11,500

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
23.1-26	4D8186	TL	12	24	7,150	DW20B	23.1	66.3	30.3	197	108	44	775

See Next Page for the Load & Inflation Table



4D8186 LOAD & INFLATION TABLE

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12	4,370	4,800	5,135	5,330	6,430	7,200	16	8,160	8,975
14	4,730	5,200	5,565	5,770	6,970	7,800	18	8,840	9,725
16	5,170	5,680	6,080	6,305	7,610	8,520	21	9,655	10,620
18	5,460	6,000	6,420	6,660	8,040	9,000	23	10,200	11,220
20	5,825	6,400	6,850	7,105	8,575	9,600	26	10,880	11,970
22	6,190	6,800	7,275	7,550	9,110	10,200	29	11,560	12,715
24	6,505	7,150	7,650	7,935	9,580	10,725	31	12,155	13,370

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
28L-26	4D8198	TL	12	20	7,400	DW25B	27.9	64.7	28.5	193	93	44	775

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12	5,025	5,520	5,905	6,125	7,395	8,280	16	9,385	10,320
14	5,460	6,000	6,420	6,660	8,040	9,000	18	10,200	11,220
16	6,005	6,600	7,060	7,325	8,845	9,900	21	11,220	12,340
18	6,325	6,950	7,435	7,715	9,315	10,425	23	11,815	12,995
20	6,735	7,400	7,920	8,215	9,915	11,100	26	12,580	13,840

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
30.5L-32	4D8396	TL	14	22	9,900	DW27B, DH27, DH27B, DH27H, DH27HB	31.0	73.6	33.7	219	118	46	875

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12	6,325	6,950	7,435	7,715	9,315	10,425	16	11,815	12,995
14	6,915	7,600	8,130	8,435	10,185	11,400	18	12,920	14,210
16	7,510	8,250	8,830	9,160	11,055	12,375	21	14,025	15,430
18	8,010	8,800	9,415	9,770	11,790	13,200	23	14,960	16,455
20	8,510	9,350	10,005	10,380	12,530	14,025	26	15,895	17,485
22	9,010	9,900	10,595	10,990	13,265	14,850	29	16,830	18,515

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
DW500/95D32	4DW7KR	TL	162A8/169A5	25	12,800	DW13A	19.6	72.4	32.3	216	67	--	--

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
20	10,010	11,000	11,770	12,210	14,740	16,500	26	18,700	20,570
25	11,650	12,800	13,695	14,210	17,150	19,200	33	21,760	23,935



GOODYEAR ALL WEATHER RADIAL R-3

- Longer wear, increased fuel efficiencies
- Increased hillside stability
- Diamond tread design for minimal soil disruption
- High traction in loose, sandy soil provided by the large tread area
- Ideal for golf courses, parks, citrus groves and highway mowing



Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
480/80R26	4AW456	TL	149A8/B	35	7,150	W14L, DW14L, W15L, DW15A, DW15L, W16L, DW16L	18.5	56.8	25.6	171	28	41	675

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
						Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	2,430	2,600	2,695	3,255	3,645	12	4,130
9	3,300	3,530	3,665	4,420	4,950	15	5,610
12	3,860	4,130	4,285	5,170	5,790	17	6,560
17	4,940	5,285	5,485	6,620	7,410	23	8,400
23	6,000	6,420	6,660	8,040	9,000	29	10,200
29	6,600	7,060	7,325	8,845	9,900	36	11,220
32	6,950	7,435	7,715	9,315	10,425	41	11,815
35	7,150	7,650	7,935	9,580	10,725	44	12,155

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
580/70R26	4AWA86	TL	160A8/B	46	9,900	W18L, DW18L, DW20B	22.7	59.3	26.9	179	21	--	700

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
						Inflation Pressure (psi)	6 mph (lbs)
9	3,485	3,905	4,145	4,600	5,505	15	5,925
12	4,680	5,240	5,570	6,180	7,395	17	7,955
17	6,000	6,720	7,140	7,920	9,480	23	10,200
23	7,150	8,010	8,510	9,440	11,295	29	12,155
29	8,050	9,015	9,580	10,625	12,720	36	13,685
35	8,550	9,575	10,175	11,285	13,510	44	14,535
41	9,350	10,470	11,125	12,340	14,775	51	15,895
46	9,900	11,090	11,780	13,070	15,640	58	16,830





GOODYEAR ALL WEATHER R-3

- Longer wear, increased fuel efficiencies
- Increased hillside stability
- Diamond tread design for minimal soil disruption
- High traction in loose, sandy soil provided by the large tread area
- Ideal for golf courses, parks, citrus groves and highway mowing



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
9.5-16	4AW895	TL	8	40	1,650	W8L, 8LB	9.7	31.9	14.6	95	15	--	390

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12	750	825	885	915	1,105	1,240	16	1,405	1,545
16	880	965	1,035	1,070	1,295	1,450	21	1,640	1,805
20	1,000	1,100	1,175	1,220	1,475	1,650	26	1,870	2,055
24	1,120	1,230	1,315	1,365	1,650	1,845	31	2,090	2,300
28	1,240	1,360	1,455	1,510	1,820	2,040	36	2,310	2,545
32	1,345	1,480	1,585	1,645	1,985	2,220	42	2,515	2,770
36	1,430	1,570	1,680	1,745	2,105	2,355	47	2,670	2,935
40	1,500	1,650	1,765	1,830	2,210	2,475	52	2,805	3,085

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
9.5-24	4AW494	TL	4	20	1,480	W7, W8, W8H	9.7	39.5	18.3	118	18	34	500

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12	1,000	1,100	1,175	1,220	1,475	1,650	16	1,870	2,055
14	1,090	1,200	1,285	1,330	1,610	1,800	18	2,040	2,245
16	1,165	1,280	1,370	1,420	1,715	1,920	21	2,175	2,395
18	1,265	1,390	1,485	1,545	1,865	2,085	23	2,365	2,600
20	1,345	1,480	1,585	1,645	1,985	2,220	26	2,515	2,770

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
13.6-16.1	4AW381	TL	8	28	2,340	W11C	14.1	39.0	17.5	115	23	--	475

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12	1,300	1,430	1,530	1,585	1,915	2,145	16	2,430	2,675
16	1,555	1,710	1,830	1,900	2,290	2,565	21	2,905	3,200
18	1,655	1,820	1,945	2,020	2,440	2,730	23	3,095	3,405
20	1,755	1,930	2,065	2,140	2,585	2,895	26	3,280	3,610
22	1,855	2,040	2,185	2,265	2,735	3,060	29	3,470	3,815
24	1,955	2,150	2,300	2,385	2,880	3,225	31	3,655	4,020
26	2,065	2,270	2,430	2,520	3,040	3,405	34	3,860	4,245
28	2,130	2,340	2,505	2,595	3,135	3,510	36	3,980	4,375





ALL WEATHER

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
14.9-24	4AW634	TL	6	20	3,000	W11, DW11, W12, DW12, W13, DW13, DW13L	15.4	49.7	23.0	149	23	--	600

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12	2,000	2,200	2,355	2,440	2,950	3,300	16	3,740	4,115
14	2,185	2,400	2,570	2,665	3,215	3,600	18	4,080	4,490
16	2,365	2,600	2,780	2,885	3,485	3,900	21	4,420	4,860
18	2,575	2,830	3,030	3,140	3,790	4,245	23	4,810	5,290
20	2,730	3,000	3,210	3,330	4,020	4,500	26	5,100	5,610

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
16.9-24	4AW645	TL	6	18	3,420	W14L, DW14L, W15L, DW15L	17.2	50.3	22.2	146	26	--	625

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12	2,440	2,680	2,870	2,975	3,590	4,020	16	4,555	5,010
14	2,650	2,910	3,115	3,230	3,900	4,365	18	4,945	5,440
16	2,910	3,200	3,425	3,550	4,290	4,800	21	5,440	5,985
18	3,110	3,420	3,660	3,795	4,585	5,130	23	5,815	6,395

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
18.4-16.1	4AW890	TL	8	20	2,910	W16C, W16CH	18.7	43.5	19.4	128	29	36	525

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12	1,955	2,150	2,300	2,385	2,880	3,225	16	3,655	4,020
14	2,130	2,340	2,505	2,595	3,135	3,510	18	3,980	4,375
16	2,310	2,540	2,720	2,820	3,405	3,810	21	4,320	4,750
18	2,440	2,680	2,870	2,975	3,590	4,020	23	4,555	5,010
20	2,650	2,910	3,115	3,230	3,900	4,365	26	4,945	5,440

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
18.4-26	4AW156	TL	12	32	5,840	W15L, DW15A, DW16A	19.1	55.7	24.5	164	28	41	675

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12	3,005	3,300	3,530	3,665	4,420	4,950	16	5,610	6,170
16	3,605	3,960	4,235	4,395	5,305	5,940	21	6,730	7,405
20	4,130	4,540	4,860	5,040	6,085	6,810	26	7,720	8,490
22	4,370	4,800	5,135	5,330	6,430	7,200	29	8,160	8,975
26	4,730	5,200	5,565	5,770	6,970	7,800	34	8,840	9,725
28	5,025	5,520	5,905	6,125	7,395	8,280	36	9,385	10,320
30	5,170	5,680	6,080	6,305	7,610	8,520	39	9,655	10,620
32	5,315	5,840	6,250	6,480	7,825	8,760	42	9,930	10,920



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
23.1-26	4AW886	TL	8	16	5,680	DW20B	22.7	58.7	26.5	173	21	--	750
23.1-26	4AW186	TL	12	24	7,150	DW20B	22.7	59.3	27.2	177	21	--	750

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service						
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)				
12	4,370	4,800	5,135	5,330	6,430	7,200	16	8,160	8,975				
14	4,730	5,200	5,565	5,770	6,970	7,800	18	8,840	9,725				
16	5,170	5,680	6,080	6,305	7,610	8,520	21	9,655	10,620				
END OF 4AW886													
18	5,460	6,000	6,420	6,660	8,040	9,000	23	10,200	11,220				
20	5,825	6,400	6,850	7,105	8,575	9,600	26	10,880	11,970				
22	6,190	6,800	7,275	7,550	9,110	10,200	29	11,560	12,715				
24	6,505	7,150	7,650	7,935	9,580	10,725	31	12,155	13,370				

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
28L-26	4AW598	TL	16	28	9,100	DW25B	29.1	62.2	27.7	184	30	43	750

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12	5,025	5,520	5,905	6,125	7,395	8,280	16	9,385	10,320
16	6,005	6,600	7,060	7,325	8,845	9,900	21	11,220	12,340
18	6,325	6,950	7,435	7,715	9,315	10,425	23	11,815	12,995
20	6,735	7,400	7,920	8,215	9,915	11,100	26	12,580	13,840
22	7,145	7,850	8,400	8,715	10,520	11,775	29	13,345	14,680
24	7,510	8,250	8,830	9,160	11,055	12,375	31	14,025	15,430
26	8,010	8,800	9,415	9,770	11,790	13,200	34	14,960	16,455
28	8,280	9,100	9,735	10,100	12,195	13,650	36	15,470	17,015

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
30.5L-32	4AW196	TL	12	20	9,350	DW27B, DH27, DH27B, DH27H, DH27HB	30.1	69.7	30.5	206	37	45	875

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12	6,325	6,950	7,435	7,715	9,315	10,425	16	11,815	12,995
14	6,915	7,600	8,130	8,435	10,185	11,400	18	12,920	14,210
16	7,510	8,250	8,830	9,160	11,055	12,375	21	14,025	15,430
18	8,010	8,800	9,415	9,770	11,790	13,200	23	14,960	16,455
20	8,510	9,350	10,005	10,380	12,530	14,025	26	15,895	17,485

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
VA30.5L-32	4VA596	TL	16	26	11,000	27VA	30.1	69.7	30.5	206	37	45	875

See Next Page for the Load & Inflation Table



4VA596 LOAD & INFLATION TABLE

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12	6,325	6,950	7,435	7,715	9,315	10,425	16	11,815	12,995
14	6,915	7,600	8,130	8,435	10,185	11,400	18	12,920	14,210
16	7,510	8,250	8,830	9,160	11,055	12,375	21	14,025	15,430
18	8,010	8,800	9,415	9,770	11,790	13,200	23	14,960	16,455
20	8,510	9,350	10,005	10,380	12,530	14,025	26	15,895	17,485
22	9,010	9,900	10,595	10,990	13,265	14,850	29	16,830	18,515
24	9,555	10,500	11,235	11,655	14,070	15,750	31	17,850	19,635
26	10,010	11,000	11,770	12,210	14,740	16,500	34	18,700	20,570



GOODYEAR ALL WEATHER RADIAL II R-3

- This rugged tire minimizes ground disturbance with a button tread pattern that offers good performance on vibratory rollers and combine applications



Tire Size	Catalog #	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
23.1R26	4R5286	TL	2*	153A8/B	24	8,050	DW20B	23.5	60.9	27.1	183	35	--	750

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
						Inflation Pressure (psi)	6 mph (lbs)
8	4,180	4,475	4,640	5,600	6,270	14	7,105
10	4,800	5,135	5,330	6,430	7,200	16	8,160
12	5,360	5,735	5,950	7,180	8,040	17	9,110
16	6,400	6,850	7,105	8,575	9,600	22	10,880
18	6,800	7,275	7,550	9,110	10,200	24	11,560
20	7,150	7,650	7,935	9,580	10,725	26	12,155
22	7,600	8,130	8,435	10,185	11,400	28	12,920
24	8,050	8,615	8,935	10,785	12,075	30	13,685

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
480/80R38	AW2877	TL	164A8/B	58	11,000	W14L, DW14L, W15A, W15L, DW15L, W16A, W16L, DW16A, DW16L, DD16	19.3	68.3	30.7	203	31	45	825

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
						Inflation Pressure (psi)	6 mph (lbs)
29	7,850	8,400	8,715	10,520	11,775	36	13,345
35	8,550	9,150	9,490	11,455	12,825	44	14,535
41	9,100	9,735	10,100	12,195	13,650	51	15,470
44	9,650	10,325	10,710	12,930	14,475	55	16,405
46	9,900	10,595	10,990	13,265	14,850	58	16,830
49	10,200	10,915	11,320	13,670	15,300	61	17,340
52	10,500	11,235	11,655	14,070	15,750	64	17,850
58	11,000	11,770	12,210	14,740	16,500	70	18,700



GOODYEAR SOFTRAC II R-3

- Good flotation due to the wide, flat tread
- Minimal ground disruption provided by its button tread design
- Dependable traction on or off the road



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
16.5L-16.1SL	4FS3M2	TL	6	24	3,960	W14C, W14CH	16.6	40.3	17.1	109	20	--	--
Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)							
20	3,520	3,730	3,940	4,190	4,645	5,560							
22	3,740	3,965	4,190	4,450	4,935	5,910							
24	3,960	4,200	4,435	4,710	5,225	6,255							

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
19.5L-24	4FS061	TL	10	24	4,680	W15L, W16L, DW16A, DW16L	19.5	52.5	23.9	155	27	--	625
Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service			RCI	SRI		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)				
12	2,805	3,080	3,915	3,420	4,125	4,620	16	6,220	6,845	--	625		
14	3,110	3,420	4,345	3,795	4,585	5,130	18	6,900	7,590				
16	3,310	3,640	4,630	4,040	4,880	5,460	21	7,355	8,090				
18	3,515	3,860	4,905	4,285	5,170	5,790	23	7,795	8,575				
20	3,805	4,180	5,315	4,640	5,600	6,270	26	8,440	9,285				
22	4,005	4,400	5,590	4,885	5,895	6,600	29	8,885	9,770				
24	4,260	4,680	5,950	5,195	6,270	7,020	31	9,450	10,395				

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
21.5L-16.1SL	4FS349	TL	10	22	3,860	W16C, W16CH, W18C, W18CH	20.9	44.5	18.7	119	30	--	--
Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)							
12	2,760	2,925	3,090	3,285	3,645	4,360							
14	3,000	3,180	3,360	3,570	3,960	4,740							
16	3,200	3,390	3,585	3,810	4,225	5,055							
18	3,420	3,625	3,830	4,070	4,515	5,405							
20	3,640	3,860	4,075	4,330	4,805	5,750							
22	3,860	4,090	4,325	4,595	5,095	6,100							





GOODYEAR SFT105 R-3

- Specially designed for turf applications
- Minimum soil disturbance
- Low inflation operating pressures



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
11.2-24	4SF604	TL	6	26	2,090	W9, W10, W10H, W10L, DW10	11.3	42.5	19.9	126	20	36	--

Inflation Pressure (psi)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
12	1,320	1,410	1,465	1,770	1,980
14	1,430	1,530	1,585	1,915	2,145
16	1,570	1,680	1,745	2,105	2,355
18	1,650	1,765	1,830	2,210	2,475
20	1,760	1,885	1,955	2,360	2,640
22	1,870	2,000	2,075	2,505	2,805
24	1,980	2,120	2,200	2,655	2,970
26	2,090	2,235	2,320	2,800	3,135

Cyclic Service		
Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
16	2,245	2,470
18	2,430	2,675
21	2,670	2,935
23	2,805	3,085
26	2,990	3,290
29	3,180	3,495
31	3,365	3,705
34	3,555	3,910

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
16.9-30	4SF679	TL	6	18	3,740	W14L, DW14A, DW14L, W15L, DW15A, DW15L	17.2	57.5	26.1	170	26	41	--

Inflation Pressure (psi)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
12	3,000	3,210	3,330	4,020	4,500
14	3,300	3,530	3,665	4,420	4,950
16	3,520	3,765	3,905	4,715	5,280
18	3,740	4,000	4,150	5,010	5,610

Cyclic Service		
Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
16	5,100	5,610
18	5,610	6,170
21	5,985	6,580
23	6,360	6,995





GOODYEAR IT515 HS R-4

- Designed for backhoe/loader operations
- More lugs for improved puncture resistance
- Better durability provided by the natural shaped carcass



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
19.5L-24	4H5161	TL	12	34	7,600	DW16A, DW16L	20.2	52.5	23.7	156	34	--	625

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							10 mph (lbs)	5 mph (lbs)	3 mph (lbs)
12	3,205	3,520	3,660	3,730	3,980	4,400	4,715	5,280	5,880
16	4,005	4,400	4,575	4,665	4,970	5,500	5,895	6,600	7,350
20	4,730	5,200	5,410	5,510	5,875	6,500	6,970	7,800	8,685
24	5,460	6,000	6,240	6,360	6,780	7,500	8,040	9,000	10,020
28	6,005	6,600	6,865	6,995	7,460	8,250	8,845	9,900	11,020
30	6,325	6,950	7,230	7,365	7,855	8,690	9,315	10,425	11,605
32	6,735	7,400	7,695	7,845	8,360	9,250	9,915	11,100	12,360
34	6,915	7,600	7,905	8,055	8,590	9,500	10,185	11,400	12,690



GOODYEAR IT520 R-4

- Outstanding soft soil traction
- Reinforced lugs for deeper grip and extended wear
- Industrial use applications



Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
460/70R24IND	4528A4	TL	159A8/B	58	9,650	W14L, DW14L, W15L, DW15L, DW16L	18.1	49.4	22.2	145	42	--	600

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							10 mph (lbs)	5 mph (lbs)	3 mph (lbs)
29	4,880	5,360	5,575	5,680	6,055	6,700	7,180	8,040	8,950
35	5,595	6,150	6,395	6,520	6,950	7,690	8,240	9,225	10,270
41	6,505	7,150	7,435	7,580	8,080	8,940	9,580	10,725	11,940
46	7,145	7,850	8,165	8,320	8,870	9,815	10,520	11,775	13,110
49	7,510	8,250	8,580	8,745	9,325	10,315	11,055	12,375	13,780
52	8,010	8,800	9,150	9,330	9,945	11,000	11,790	13,200	14,695
55	8,280	9,100	9,465	9,645	10,285	11,375	12,195	13,650	15,195
58	8,780	9,650	10,035	10,230	10,905	12,065	12,930	14,475	16,115





ROADABILITY



IMPROVED TREAD WEAR



IMPROVED PROFITABILITY



INCREASED PUNCTURE RESISTANCE

GOODYEAR IT525 R-4

Key Benefits

- Solid performance on rock-hard ground
- Increased wear and performance on hard surfaces
- Excellent traction in soft soils



Traction ●●●●●●●●●●○

Roadability ●●●●●●●●●●○

Durability ●●●●●●●●●●○

Application(s)





ROADABILITY



IMPROVED TREAD WEAR



IMPROVED PROFITABILITY




INCREASED PUNCTURE RESISTANCE

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI	
16.9-24	45T145	TL	12	38	7,150	DW14L, W15L, DW15L	16.9	51.0	23.0	151	33	39	625	
Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service			10 mph (lbs)	5 mph (lbs)	3 mph (lbs)		
	12	2,805	3,080	3,205	3,265	3,480	3,850	4,125	4,620	5,145				
18	3,915	4,300	4,470	4,560	4,860	5,375	5,760	6,450	7,180					
22	4,495	4,940	5,140	5,235	5,580	6,175	6,620	7,410	8,250					
26	5,025	5,520	5,740	5,850	6,240	6,900	7,395	8,280	9,220					
30	5,595	6,150	6,395	6,520	6,950	7,690	8,240	9,225	10,270					
32	5,825	6,400	6,655	6,785	7,230	8,000	8,575	9,600	10,690					
34	6,005	6,600	6,865	6,995	7,460	8,250	8,845	9,900	11,020					
36	6,325	6,950	7,230	7,365	7,855	8,690	9,315	10,425	11,605					
38	6,505	7,150	7,435	7,580	8,080	8,940	9,580	10,725	11,940					

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI	
16.9-28	45T148	TL	12	38	7,600	DW14L, W15L, DW15L	16.8	55.3	25.0	163	33	41	675	
Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service			10 mph (lbs)	5 mph (lbs)	3 mph (lbs)		
	12	3,005	3,300	3,430	3,500	3,730	4,125	4,420	4,950	5,510				
16	3,805	4,180	4,345	4,430	4,725	5,225	5,600	6,270	6,980					
20	4,495	4,940	5,140	5,235	5,580	6,175	6,620	7,410	8,250					
24	5,170	5,680	5,905	6,020	6,420	7,100	7,610	8,520	9,485					
28	5,595	6,150	6,395	6,520	6,950	7,690	8,240	9,225	10,270					
32	6,190	6,800	7,070	7,210	7,685	8,500	9,110	10,200	11,355					
36	6,735	7,400	7,695	7,845	8,360	9,250	9,915	11,100	12,360					
38	6,915	7,600	7,905	8,055	8,590	9,500	10,185	11,400	12,690					

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI	
18.4-24	45T164	TL	12	36	8,250	W15L, W16A, W16L	18.4	54.1	24.2	160	34	40	650	
Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service			10 mph (lbs)	5 mph (lbs)	3 mph (lbs)		
	12	3,310	3,640	3,785	3,860	4,115	4,550	4,880	5,460	6,080				
16	4,260	4,680	4,865	4,960	5,290	5,850	6,270	7,020	7,815					
20	5,025	5,520	5,740	5,850	6,240	6,900	7,395	8,280	9,220					
24	5,825	6,400	6,655	6,785	7,230	8,000	8,575	9,600	10,690					
28	6,325	6,950	7,230	7,365	7,855	8,690	9,315	10,425	11,605					
32	6,915	7,600	7,905	8,055	8,590	9,500	10,185	11,400	12,690					
34	7,325	8,050	8,370	8,535	9,095	10,065	10,785	12,075	13,445					
36	7,510	8,250	8,580	8,745	9,325	10,315	11,055	12,375	13,780					





ROADABILITY



IMPROVED TREAD WEAR



IMPROVED PROFITABILITY



INCREASED PUNCTURE RESISTANCE

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
19.5L-24	45T161	TL	12	34	7,600	DW16A, DW16L	20.1	52.5	23.8	155	34	--	625

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							10 mph (lbs)	5 mph (lbs)	3 mph (lbs)
12	3,205	3,520	3,660	3,730	3,980	4,400	4,715	5,280	5,880
16	4,005	4,400	4,575	4,665	4,970	5,500	5,895	6,600	7,350
18	4,495	4,940	5,140	5,235	5,580	6,175	6,620	7,410	8,250
20	4,730	5,200	5,410	5,510	5,875	6,500	6,970	7,800	8,685
22	5,170	5,680	5,905	6,020	6,420	7,100	7,610	8,520	9,485
24	5,460	6,000	6,240	6,360	6,780	7,500	8,040	9,000	10,020
26	5,825	6,400	6,655	6,785	7,230	8,000	8,575	9,600	10,690
28	6,005	6,600	6,865	6,995	7,460	8,250	8,845	9,900	11,020
30	6,325	6,950	7,230	7,365	7,855	8,690	9,315	10,425	11,605
32	6,735	7,400	7,695	7,845	8,360	9,250	9,915	11,100	12,360
34	6,915	7,600	7,905	8,055	8,590	9,500	10,185	11,400	12,690

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
21L-24	45T175	TL	12	32	8,550	DW18A, DW18L	21.5	53.9	24.0	158	34	40	650
21L-24	45T575	TL	16	40	9,900	DW18A, DW18L	20.8	54.2	24.3	160	34	40	650

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service						
							10 mph (lbs)	5 mph (lbs)	3 mph (lbs)				
12	3,715	4,080	4,245	4,325	4,610	5,100	5,465	6,120	6,815				
16	4,730	5,200	5,410	5,510	5,875	6,500	6,970	7,800	8,685				
20	5,595	6,150	6,395	6,520	6,950	7,690	8,240	9,225	10,270				
24	6,325	6,950	7,230	7,365	7,855	8,690	9,315	10,425	11,605				
26	6,735	7,400	7,695	7,845	8,360	9,250	9,915	11,100	12,360				
28	7,145	7,850	8,165	8,320	8,870	9,815	10,520	11,775	13,110				
30	7,325	8,050	8,370	8,535	9,095	10,065	10,785	12,075	13,445				
32	7,780	8,550	8,890	9,065	11,370	10,690	11,370	10,690	10,690				
END OF 45T175													
34	8,010	8,800	9,150	9,330	9,945	11,000	11,790	13,200	14,695				
36	8,280	9,100	9,465	9,645	10,285	11,375	12,195	13,650	15,195				
38	8,780	9,650	10,035	10,230	10,905	12,065	12,930	14,475	16,115				
40	9,010	9,900	10,295	10,495	11,185	12,375	13,265	14,850	16,535				

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
21L-28	45T376	TL	14	36	9,900	DW18A	20.9	57.1	26.1	170	34	--	700

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							10 mph (lbs)	5 mph (lbs)	3 mph (lbs)
12	4,005	4,400	4,575	4,665	4,970	5,500	5,895	6,600	7,350
16	5,025	5,520	5,740	5,850	6,240	6,900	7,395	8,280	9,220
20	6,005	6,600	6,865	6,995	7,460	8,250	8,845	9,900	11,020
24	6,735	7,400	7,695	7,845	8,360	9,250	9,915	11,100	12,360
28	7,510	8,250	8,580	8,745	9,325	10,315	11,055	12,375	13,780
32	8,280	9,100	9,465	9,645	10,285	11,375	12,195	13,650	15,195
34	8,510	9,350	9,725	9,910	10,565	11,690	12,530	14,025	15,615
36	9,010	9,900	10,295	10,495	11,185	12,375	13,265	14,850	16,535



GOODYEAR IT530 R-4

- Excellent hard soil traction
- High puncture resistance
- Refined road comfort



Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
500/70R24	453661	TL	157A8/B	46	9,100	W15L, DW15L, W16L, DW16A, DW16L, DW18L	19.5	51.2	22.8	154	34	--	625

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							10 mph (lbs)	5 mph (lbs)	3 mph (lbs)
23	4,730	5,200	5,410	5,510	5,875	6,500	6,970	7,800	8,685
29	5,595	6,150	6,395	6,520	6,950	7,690	8,240	9,225	10,270
32	6,005	6,600	6,865	6,995	7,460	8,250	8,845	9,900	11,020
35	6,505	7,150	7,435	7,580	8,080	8,940	9,580	10,725	11,940
38	6,915	7,600	7,905	8,055	8,590	9,500	10,185	11,400	12,690
41	7,325	8,050	8,370	8,535	9,095	10,065	10,785	12,075	13,445
44	7,780	8,550	8,890	9,065	9,660	10,690	11,455	12,825	14,280
46	8,280	9,100	9,465	9,645	10,285	11,375	12,195	13,650	15,195

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
540/70R24	453675	TL	161A8/B	46	10,200	W16L, DW16A, DW16L, W18L, DW18A, DW18L	21.7	53.8	23.9	161	36	40	650

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							10 mph (lbs)	5 mph (lbs)	3 mph (lbs)
23	5,315	5,840	6,075	6,190	6,600	7,300	7,825	8,760	9,755
29	6,325	6,950	7,230	7,365	7,855	8,690	9,315	10,425	11,605
32	6,915	7,600	7,905	8,055	8,590	9,500	10,185	11,400	12,690
35	7,325	8,050	8,370	8,535	9,095	10,065	10,785	12,075	13,445
38	7,780	8,550	8,890	9,065	9,660	10,690	11,455	12,825	14,280
41	8,280	9,100	9,465	9,645	10,285	11,375	12,195	13,650	15,195
44	8,780	9,650	10,035	10,230	10,905	12,065	12,930	14,475	16,115
46	9,280	10,200	10,610	10,810	11,525	12,750	13,670	15,300	17,035





GOODYEAR TRIPLE RIB RS F-2

- Design provides excellent steering capabilities

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
4.00-19SL	TRR233	TT	4	52	715	3.00D	4.4	28.3	13.6	87	11	--	--

Inflation Pressure (psi)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
26	455	505	580	685	760
30	495	550	635	745	825
34	535	595	685	805	895
38	585	650	750	880	975
42	615	685	785	925	1,025
46	660	735	845	990	1,100
50	695	770	890	1,045	1,160
52	715	795	915	1,075	1,195

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
5.00-15SL	TRR335	TL	4	44	715	3.00D	5.7	25.5	11.9	77	12	--	--

Inflation Pressure (psi)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
16	355	395	455	535	595
20	430	475	550	645	720
24	480	535	615	720	800
28	535	595	685	805	895
32	585	650	750	880	975
36	640	710	820	960	1,070
40	675	750	865	1,015	1,125
44	715	795	915	1,075	1,195





GOODYEAR TRIPLE RIB HD F-2

- Improved steering in loose, cultivated soil provided by the deep, wide center rib
- 3 rib design provides excellent steering capabilities
- Excellent wear characteristics from the even load distribution on the center and shoulder ribs

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
6.50-16SL	TRD381	TL	6	48	1,230	4.00E, 4.25KA, 4.50E, 5.50F	7.7	29.8	13.9	90	18	--	--

Inflation Pressure (psi)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
20	675	750	865	1,015	1,125
24	760	845	975	1,140	1,270
28	855	950	1,095	1,285	1,430
32	935	1,040	1,195	1,405	1,560
36	1,020	1,130	1,305	1,530	1,705
40	1,100	1,220	1,410	1,650	1,835
44	1,140	1,265	1,460	1,710	1,905
48	1,230	1,365	1,575	1,845	2,055

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
7.50-16SL	TRD284	TT	8	56	1,710	5.50F, 6LB	8.5	32.7	15.3	98	18	--	--

Inflation Pressure (psi)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
28	1,100	1,220	1,410	1,650	1,835
32	1,200	1,330	1,535	1,800	2,005
36	1,320	1,465	1,690	1,980	2,205
40	1,390	1,545	1,780	2,085	2,320
44	1,480	1,645	1,895	2,220	2,470
48	1,570	1,745	2,010	2,355	2,620
52	1,650	1,830	2,110	2,475	2,755
56	1,710	1,900	2,190	2,565	2,855

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
10.00-16SL	TRD398	TL	8	44	2,340	W8L, 8LB	10.8	35.2	16.4	105	26	--	--

See Next Page for the Load & Inflation Table



TRIPLE RIB HD

TRD398 LOAD & INFLATION TABLE

Inflation Pressure (psi)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
16	1,170	1,300	1,500	1,755	1,955
20	1,390	1,545	1,780	2,085	2,320
24	1,570	1,745	2,010	2,355	2,620
28	1,760	1,955	2,255	2,640	2,940
32	1,930	2,140	2,470	2,895	3,225
36	2,090	2,320	2,675	3,135	3,490
40	2,200	2,440	2,815	3,300	3,675
44	2,340	2,595	2,995	3,510	3,910

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
11.00-16SL	TRD395	TL	8	40	2,600	W8L, 8LB, W10L, 10LB	12.4	37.9	17.6	113	27	--	--

Inflation Pressure (psi)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
12	1,100	1,220	1,410	1,650	1,835
16	1,390	1,545	1,780	2,085	2,320
20	1,650	1,830	2,110	2,475	2,755
24	1,870	2,075	2,395	2,805	3,125
28	2,090	2,320	2,675	3,135	3,490
32	2,270	2,520	2,905	3,405	3,790
36	2,470	2,740	3,160	3,705	4,125
40	2,600	2,885	3,330	3,900	4,340

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
11L-15SL	TRD218	TT	8	44	2,090	8LB, 10LB	11.0	32.0	14.4	93	24	--	--

Inflation Pressure (psi)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
16	1,050	1,165	1,345	1,575	1,755
20	1,230	1,365	1,575	1,845	2,055
24	1,390	1,545	1,780	2,085	2,320
28	1,570	1,745	2,010	2,355	2,620
32	1,710	1,900	2,190	2,565	2,855
36	1,870	2,075	2,395	2,805	3,125
40	1,980	2,200	2,535	2,970	3,305
44	2,090	2,320	2,675	3,135	3,490



GOODYEAR DYNA RIB F-2M

- Excellent flotation and mobility from four-rib design
- Excellent roadability
- Tubeless construction

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
10.00-16SL	DRT398	TL	8	44	2,340	W8L, 8LB	10.9	35.2	16.4	105	26	--	--
Inflation Pressure (psi)		25 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)			
16		1,170		1,300		1,500		1,755		1,955			
20		1,390		1,545		1,780		2,085		2,320			
24		1,570		1,745		2,010		2,355		2,620			
28		1,760		1,955		2,255		2,640		2,940			
32		1,930		2,140		2,470		2,895		3,225			
36		2,090		2,320		2,675		3,135		3,490			
40		2,200		2,440		2,815		3,300		3,675			
44		2,340		2,595		2,995		3,510		3,910			

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
11.00-16SL	DRT395	TL	8	40	2,600	W8L, 8LB, W10L, 10LB	12.8	38.3	17.6	110	29	--	--
11.00-16SL	DRT396	TL	12	60	3,420	W8L, 8LB, W10L, 10LB	12.8	38.3	17.6	110	29	--	--
Inflation Pressure (psi)		25 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)			
12		1,100		1,220		1,410		1,650		1,835			
16		1,390		1,545		1,780		2,085		2,320			
20		1,650		1,830		2,110		2,475		2,755			
24		1,870		2,075		2,395		2,805		3,125			
28		2,090		2,320		2,675		3,135		3,490			
32		2,270		2,520		2,905		3,405		3,790			
36		2,470		2,740		3,160		3,705		4,125			
40		2,600		2,885		3,330		3,900		4,340			
END OF DRT395													
42		2,680		2,975		3,430		4,020		4,475			
44		2,760		3,065		3,535		4,140		4,610			
46		2,910		3,230		3,725		4,365		4,860			
48		2,910		3,230		3,725		4,365		4,860			
52		3,080		3,420		3,940		4,620		5,145			
54		3,200		3,550		4,095		4,800		5,345			
58		3,300		3,665		4,225		4,950		5,510			
60		3,420		3,795		4,380		5,130		5,710			





Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
11.00-24SL	DRT316	TL	12	60	4,400	W10, W10H	12.8	46.3	21.6	140	29	--	--
Inflation Pressure (psi)		25 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)			
32		2,910		3,230		3,725		4,365		4,860			
36		3,200		3,550		4,095		4,800		5,345			
40		3,420		3,795		4,380		5,130		5,710			
44		3,640		4,040		4,660		5,460		6,080			
48		3,860		4,285		4,940		5,790		6,445			
52		4,080		4,530		5,220		6,120		6,815			
56		4,180		4,640		5,350		6,270		6,980			
60		4,400		4,885		5,630		6,600		7,350			

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
14L-16.1SL	DRT362	TL	12	52	3,860	W11C	14.2	38.7	17.9	114	33	--	--
Inflation Pressure (psi)		25 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)			
24		2,270		2,520		2,905		3,405		3,790			
28		2,540		2,820		3,250		3,810		4,240			
32		2,830		3,140		3,620		4,245		4,725			
36		3,000		3,330		3,840		4,500		5,010			
40		3,200		3,550		4,095		4,800		5,345			
44		3,420		3,795		4,380		5,130		5,710			
48		3,640		4,040		4,660		5,460		6,080			
52		3,860		4,285		4,940		5,790		6,445			





GOODYEAR LABORER F-3

- Industrial use for rugged applications
- Resists tearing and cracking with special tread compound
- Excellent handling and mobility with its five-rib design



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
11L-15SL	4LT310	TL	10	52	2,340	8LB, 10LB	10.9	30.8	14.2	92	12	--	--
Inflation Pressure (psi)		28 mph (lbs)		25 mph (lbs)		20 mph (lbs)		10 mph (lbs)		5 mph (lbs)			
24		1,295		1,390		1,545		2,085		2,320			
28		1,415		1,570		1,745		2,355		2,620			
32		1,540		1,710		1,900		2,565		2,855			
36		1,685		1,870		2,075		2,805		3,125			
40		1,780		1,980		2,200		2,970		3,305			
44		1,880		2,090		2,320		3,135		3,490			
48		1,980		2,200		2,440		3,300		3,675			
52		2,105		2,340		2,595		3,510		3,910			

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
11L-16SL	4LT317	TL	12	64	2,760	W8L, 8LB, W10L, 10LB	10.9	31.6	14.7	95	16	--	--
Inflation Pressure (psi)		28 mph (lbs)		25 mph (lbs)		20 mph (lbs)		10 mph (lbs)		5 mph (lbs)			
36		1,735		1,930		2,140		2,895		3,225			
40		1,880		2,090		2,320		3,135		3,490			
44		1,980		2,200		2,440		3,300		3,675			
48		2,105		2,340		2,595		3,510		3,910			
52		2,225		2,470		2,740		3,705		4,125			
56		2,285		2,540		2,820		3,810		4,240			
60		2,410		2,680		2,975		4,020		4,475			
64		3,010		2,760		3,065		4,140		4,610			

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
14.5/75-16.1SL	4LT388	TL	10	40	3,200	W11C	14.8	36.8	17.3	111	19	--	--
Inflation Pressure (psi)		28 mph (lbs)		25 mph (lbs)		20 mph (lbs)		10 mph (lbs)		5 mph (lbs)			
12		1,190		1,320		1,465		1,980		2,205			
16		1,540		1,710		1,900		2,565		2,855			
20		1,780		1,980		2,200		2,970		3,305			
24		2,045		2,270		2,520		3,405		3,790			
28		2,285		2,540		2,820		3,810		4,240			
32		2,485		2,760		3,065		4,140		4,610			
36		2,700		3,000		3,330		4,500		5,010			
40		2,880		3,200		3,550		4,800		5,345			





GOODYEAR MULTI RIB F-3

- Easy mobility with the rounded shoulder design
- Withstands scuffing and abrasions with the reinforced sidewall construction



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
9.00-10NHS	4MR3T8	TL	10	60	1,820	6.00F, 5.50F	9.4	26.0	11.9	76	10	--	--
Inflation Pressure (psi)	28 mph (lbs)		25 mph (lbs)		20 mph (lbs)		10 mph (lbs)		5 mph (lbs)				
32	1,080		1,200		1,330		1,800		2,005				
36	1,190		1,320		1,465		1,980		2,205				
40	1,250		1,390		1,545		2,085		2,320				
44	1,330		1,480		1,645		2,220		2,470				
48	1,415		1,570		1,745		2,355		2,620				
52	1,485		1,650		1,830		2,475		2,755				
56	1,585		1,760		1,955		2,640		2,940				
60	1,640		1,820		2,020		2,730		3,040				





GOODYEAR FS24 I-1

- Radial construction
- Large contact area
- Round shoulders
- Highway appearing tread design
- Low rolling resistance
- Excellent protection against punctures
- Smooth running on the road
- Long life
- Very good stability



Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32nd in)	RCI	SRI
340/60R16.5IMP	FS2432	TL	145A8/B	73	6,400	11.00, 12.00	12.6	32.5	14.2	97	11	--	--
Inflation Pressure (psi)	30 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)				
35	4,080		4,570		4,855		5,385		7,220				
41	4,680		5,240		5,570		6,180		8,280				
46	4,940		5,535		5,880		6,520		8,745				
52	5,520		6,180		6,570		7,285		9,765				
58	6,000		6,720		7,140		7,920		10,620				
64	6,150		6,890		7,320		8,120		10,885				
73	6,400		7,170		7,615		8,450		11,330				

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32nd in)	RCI	SRI
340/65R18IMP	FS2418	TL	148A8/B	78	6,950	11	13.1	35.1	15.7	106	11	--	--
Inflation Pressure (psi)	30 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)				
35	4,300		4,815		5,115		5,675		7,610				
41	4,800		5,375		5,710		6,335		8,495				
46	5,200		5,825		6,190		6,865		9,205				
52	5,840		6,540		6,950		7,710		10,335				
58	6,400		7,170		7,615		8,450		11,330				
64	6,600		7,390		7,855		8,710		11,675				
73	6,800		7,615		8,090		8,975		12,030				
78	6,950		7,785		8,270		9,175		12,300				

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32nd in)	RCI	SRI
360/65R17.5IMP	FS2484	TL	151A8/B	73	7,600	10.50	14.1	35.7	15.6	106	11	--	--
Inflation Pressure (psi)	30 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)				
35	4,940		5,535		5,880		6,520		8,745				
41	5,520		6,180		6,570		7,285		9,765				
46	6,000		6,720		7,140		7,920		10,620				
52	6,600		7,390		7,855		8,710		11,675				
58	7,150		8,010		8,510		9,440		12,655				
64	7,400		8,290		8,805		9,770		13,100				
73	7,600		8,510		9,045		10,030		13,445				





FS24

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32nd in)	RCI	SRI
380/55R16.5IMP	FS2461	TL	150A8/B	73	7,400	11.00, 12.00	13.7	33.3	14.4	99	11	--	--

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
35	4,680	5,240	5,570	6,180	8,280
41	5,360	6,005	6,380	7,075	9,490
46	5,680	6,360	6,760	7,500	10,050
52	6,400	7,170	7,615	8,450	11,330
58	6,950	7,785	8,270	9,175	12,300
64	7,150	8,010	8,510	9,440	12,655
73	7,400	8,290	8,805	9,770	13,100

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32nd in)	RCI	SRI
380/70R19.5IMP	FS2436	TL	158A8/B	73	9,350	11.75, 12.25	16.1	40.4	17.8	121	11	--	--

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
35	6,000	6,720	7,140	7,920	10,620
41	6,800	7,615	8,090	8,975	12,030
46	7,150	8,010	8,510	9,440	12,655
52	8,050	9,015	9,580	10,625	14,245
58	8,800	9,855	10,470	11,615	15,570
64	9,100	10,190	10,830	12,010	16,100
73	9,350	10,470	11,125	12,340	16,545

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32nd in)	RCI	SRI
440/55R18IMP	FS2693	TL	159A8/B	73	9,650	14	15.7	37.0	16.2	111	11	--	--

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
35	6,150	6,890	7,320	8,120	10,885
41	6,950	7,785	8,270	9,175	12,300
46	7,400	8,290	8,805	9,770	13,100
52	8,250	9,240	9,820	10,890	14,600
58	9,100	10,190	10,830	12,010	16,100
64	9,350	10,470	11,125	12,340	16,545
73	9,650	10,810	11,485	12,740	17,080

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32nd in)	RCI	SRI
480/55R22.5IMP	FS24DN	TL	166A8/B	73	11,700	14.00, AG16.00	18.2	42.2	18.6	126	11	--	--

See Next Page for the Load & Inflation Table



FS24DN LOAD & INFLATION TABLE

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
35	7,400	8,290	8,805	9,770	13,100
41	8,250	9,240	9,820	10,890	14,600
46	9,100	10,190	10,830	12,010	16,100
52	9,900	11,090	11,780	13,070	17,520
58	10,700	11,985	12,735	14,125	18,935
64	11,400	12,770	13,565	15,050	20,175
73	11,700	13,105	13,925	15,445	20,705

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32nd in)	RCI	SRI
500/40R16.5IMP	FS24YT	TL	153A8/B	73	8,050	16.00	18.7	32.2	14.0	96	11	--	--

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
35	5,200	5,825	6,190	6,865	9,205
41	5,840	6,540	6,950	7,710	10,335
46	6,150	6,890	7,320	8,120	10,885
52	6,950	7,785	8,270	9,175	12,300
58	7,600	8,510	9,045	10,030	13,445
64	7,850	8,790	9,340	10,360	13,890
73	8,050	9,015	9,580	10,625	14,245





GOODYEAR RIB IMPLEMENT I-1

- Easy rolling resistance with its flex-rib design
- Designed for dependable on/off highway service
- Sidewall abrasion protection from the raised diamond scuff band



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32nd in)	RCI	SRI
4.00-18SL	4RB262	TT	4	44	880	3.00D	4.3	26.7	12.6	81	5	--	--
Inflation Pressure (psi)		30 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)			
20		520		580		620		685		820			
24		585		655		695		770		925			
28		660		740		785		870		1,045			
32		715		800		850		945		1,130			
36		785		880		935		1,035		1,240			
40		825		925		980		1,090		1,305			
44		880		985		1,045		1,160		1,390			

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32nd in)	RCI	SRI
11.25-24SL	4RB3K9	TL	12	48	5,200	W8, W8H, W10, W10H	13.3	45.8	20.6	132	11	--	--
Inflation Pressure (psi)		30 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)			
24		3,300		3,695		3,925		4,355		5,215			
28		3,640		4,075		4,330		4,805		5,750			
32		4,080		4,570		4,855		5,385		6,445			
36		4,300		4,815		5,115		5,675		6,795			
40		4,680		5,240		5,570		6,180		7,395			
44		4,940		5,535		5,880		6,520		7,805			
48		5,200		5,825		6,190		6,865		8,215			

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32nd in)	RCI	SRI
11.25-28SL	4RB361	TL	12	48	5,360	W10, W10H	13.2	50.1	22.6	144	11	--	--
Inflation Pressure (psi)		30 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)			
24		3,420		3,830		4,070		4,515		5,405			
28		3,860		4,325		4,595		5,095		6,100			
32		4,180		4,680		4,975		5,520		6,605			
36		4,540		5,085		5,405		5,995		7,175			
40		4,800		5,375		5,710		6,335		7,585			
44		5,080		5,690		6,045		6,705		8,025			
48		5,360		6,005		6,380		7,075		8,470			



GOODYEAR RADIAL IMPLEMENT I-1

- IF Technology allows the tire to run at approximately 20% lower inflation pressure
- Reduces soil compaction in the field
- Flatter tread profile for improved load distribution
- Steel belted for improved puncture resistance



Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32nd in)	RCI	SRI
IF240/80R15IMP	FSR313	TL	121D	46	3,200	8LB	9.6	29.6	13.2	89	11	--	--

Inflation Pressure (psi)	43 mph (lbs)	Duals	40 mph (lbs)	Duals
23	1,755	1,545	1,930	1,700
26	1,900	1,670	2,090	1,840
29	2,065	1,815	2,270	2,000
32	2,250	1,980	2,470	2,175
35	2,310	2,035	2,540	2,235
38	2,510	2,210	2,760	2,430
41	2,650	2,330	2,910	2,560
46	2,910	2,560	3,200	2,815

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32nd in)	RCI	SRI
IF270/85R15IMP	FSR3L1	TL	126D	41	3,740	8LB	10.3	33.2	14.6	99	11	--	--

Inflation Pressure (psi)	43 mph (lbs)	Duals	40 mph (lbs)	Duals
20	1,600	1,410	1,760	1,550
23	1,755	1,545	1,930	1,700
26	1,900	1,670	2,090	1,840
29	2,065	1,815	2,270	2,000
32	2,250	1,980	2,470	2,175
35	2,310	2,035	2,540	2,235
38	2,510	2,210	2,760	2,430
41	2,650	2,330	2,910	2,560

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32nd in)	RCI	SRI
IF280/70R15IMP	FSR392	TL	134D	64	4,680	8LB, 10LB	10.4	30.0	13.2	90	12	--	--

See Next Page for the Load & Inflation Table





RADIAL IMPLEMENT

FSR392 LOAD & INFLATION TABLE

Inflation Pressure (psi)	43 mph (lbs)	Duals	40 mph (lbs)	Duals
23	2,000	1,760	2,200	1,935
29	2,365	2,080	2,600	2,290
35	2,650	2,330	2,910	2,560
41	3,005	2,645	3,300	2,905
46	3,205	2,820	3,520	3,100
52	3,605	3,170	3,960	3,485
58	3,915	3,445	4,300	3,785
64	4,260	3,750	4,680	4,120

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32nd in)	RCI	SRI
IF320/70R15IMP	FSR387	TL	144D	70	6,150	10LB	11.7	32.1	14.0	96	12	--	--
Inflation Pressure (psi)	43 mph (lbs)	Duals	40 mph (lbs)	Duals									
35	3,205	2,820	3,520	3,100									
38	3,515	3,095	3,860	3,395									
44	3,915	3,445	4,300	3,785									
49	4,260	3,750	4,680	4,120									
55	4,625	4,070	5,080	4,470									
61	5,025	4,420	5,520	4,860									
64	5,315	4,675	5,840	5,140									
70	5,595	4,925	6,150	5,410									



GOODYEAR DRILL RIB I-1

- Distinct shoulder ridges
- Smooth center
- Primarily designed for grain drills



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32nd in)	RCI	SRI
7.50-20SL	4DRL01	TL	10	60	2,910	5.50F	8.5	36.5	N/A	N/A	0	--	--
Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	10 mph (lbs)	5 mph (lbs)									
30	1,870	2,095	2,470	2,955									
34	2,040	2,285	2,695	3,225									
38	2,150	2,410	2,840	3,395									
42	2,340	2,620	3,090	3,695									
46	2,470	2,765	3,260	3,905									
50	2,600	2,910	3,430	4,110									
54	2,760	3,090	3,645	4,360									
58	2,830	3,170	3,735	4,470									
60	2,910	3,260	3,840	4,600									



GOODYEAR FARM UTILITY I-1

- Outstanding flotation
- Easy steering from the heavy grooved ribs
- Extra-wide design



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32nd in)	RCI	SRI
7.60-15SL	4FU337	TL	8	52	2,090	6LB	8.0	29.3	13.4	86	6	--	--

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
26	1,320	1,480	1,570	1,740	2,340
30	1,480	1,660	1,760	1,955	2,625
34	1,570	1,760	1,870	2,070	2,780
38	1,710	1,915	2,035	2,255	3,025
42	1,820	2,040	2,165	2,400	3,225
46	1,930	2,160	2,295	2,550	3,415
50	2,040	2,285	2,430	2,695	3,610
52	2,090	2,340	2,485	2,760	3,695

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32nd in)	RCI	SRI
8.5L-14SL	4FU389	TL	6	36	1,870	6KB, 8KB	8.8	28.1	12.8	82	7	--	--

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
12	825	925	980	1,090	1,460
16	1,050	1,175	1,250	1,385	1,855
20	1,230	1,380	1,465	1,625	2,180
24	1,390	1,555	1,655	1,835	2,455
28	1,570	1,760	1,870	2,070	2,780
32	1,710	1,915	2,035	2,255	3,025
36	1,870	2,095	2,225	2,470	3,310





Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32nd in)	RCI	SRI
9.5L-15SL	4FU344	TL	8	44	2,470	8LB	9.5	29.8	13.6	87	7	--	--
9.5L-15SL	4FU3D7	TL	12	64	3,200	8LB	9.5	29.8	13.6	87	7	--	--

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
20	1,430	1,600	1,700	1,890	2,530
24	1,650	1,850	1,965	2,180	2,925
28	1,820	2,040	2,165	2,400	3,225
32	2,040	2,285	2,430	2,695	3,610
36	2,200	2,465	2,620	2,905	3,895
40	2,340	2,620	2,785	3,090	4,140
44	2,470	2,765	2,940	3,260	4,370
END OF 4FU344					
46	2,540	2,845	3,025	3,355	4,495
50	2,680	3,000	3,190	3,540	4,740
52	2,760	3,090	3,285	3,645	4,880
56	2,910	3,260	3,465	3,840	5,150
58	3,000	3,360	3,570	3,960	5,310
62	3,080	3,450	3,665	4,065	5,450
64	3,200	3,585	3,810	4,225	5,665

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32nd in)	RCI	SRI
10.00-15SL	4FU3M1	TL	8	40	3,200	8LB	10.2	33.1	14.7	97	11	--	--

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
20	1,980	2,220	2,355	2,615	3,510
24	2,270	2,540	2,700	2,995	4,015
28	2,540	2,845	3,025	3,355	4,495
32	2,760	3,090	3,285	3,645	4,880
36	3,000	3,360	3,570	3,960	5,310
38	3,080	3,450	3,665	4,065	5,450
40	3,200	3,585	3,810	4,225	5,665

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32nd in)	RCI	SRI
11L-14SL	4FU391	TL	8	36	2,470	8KB	10.6	29.6	13.1	86	8	--	--

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
20	1,610	1,805	1,915	2,125	2,850
22	1,760	1,970	2,095	2,325	3,115
26	1,980	2,220	2,355	2,615	3,510
28	2,040	2,285	2,430	2,695	3,610
32	2,270	2,540	2,700	2,995	4,015
34	2,340	2,620	2,785	3,090	4,140
36	2,470	2,765	2,940	3,260	4,370



Tire Size	Catalog #	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32nd in)	RCI	SRI
11L-15SL	4FU318	TL	8	N/A	36	2,540	8LB, 10LB	10.6	31.1	13.8	91	7	--	--
11L-15SL	4FU319	TL	10	118B	44	2,910	8LB, 10LB	10.5	31.1	13.9	91	7	--	--
11L-15SL	4FU317	TL	12	N/A	52	3,200	8LB, 10LB	10.1	30.4	13.7	89	7	--	--

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
20	1,710	1,915	2,035	2,255	3,025
22	1,820	2,040	2,165	2,400	3,225
26	2,040	2,285	2,430	2,695	3,610
30	2,270	2,540	2,700	2,995	4,015
32	2,340	2,620	2,785	3,090	4,140
34	2,470	2,765	2,940	3,260	4,370
36	2,540	2,845	3,025	3,355	4,495
END OF 4FU318					
38	2,600	2,910	3,095	3,430	4,600
40	2,760	3,090	3,285	3,645	4,880
42	2,830	3,170	3,370	3,735	5,010
44	2,910	3,260	3,465	3,840	5,150
END OF 4FU319					
46	3,000	3,360	3,570	3,960	5,310
48	3,080	3,450	3,665	4,065	5,450
52	3,200	3,585	3,810	4,225	5,665

Tire Size	Catalog #	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32nd in)	RCI	SRI
11L-16SL	4FU324	TL	10	44	44	3,000	W8L, 8LB, W10L, 10LB	10.5	31.1	13.9	89	9	--	--

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
20	1,760	1,970	2,095	2,325	3,115
24	2,040	2,285	2,430	2,695	3,610
28	2,270	2,540	2,700	2,995	4,015
32	2,470	2,765	2,940	3,260	4,370
36	2,680	3,000	3,190	3,540	4,740
40	2,830	3,170	3,370	3,735	5,010
44	3,000	3,360	3,570	3,960	5,310





Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32nd in)	RCI	SRI
12.5L-15SL	4FU340	TL	8	36	3,000	10LB	12.6	32.4	14.5	93	8	--	--
12.5L-15SL	4FU341	TL	10	44	3,420	10LB	12.2	32.3	14.4	94	8	--	--
12.5L-15SL	4FU305	TL	12	52	3,860	10LB	12.6	32.4	14.5	93	8	--	--
Inflation Pressure (psi)	30 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)				
20	1,980		2,220		2,355		2,615		3,510				
22	2,150		2,410		2,560		2,840		3,810				
26	2,400		2,690		2,855		3,170		4,250				
28	2,540		2,845		3,025		3,355		4,495				
30	2,680		3,000		3,190		3,540		4,740				
34	2,910		3,260		3,465		3,840		5,150				
36	3,000		3,360		3,570		3,960		5,310				
END OF 4FU340													
38	3,080		3,450		3,665		4,065		5,450				
40	3,200		3,585		3,810		4,225		5,665				
42	3,300		3,695		3,925		4,355		5,840				
44	3,420		3,830		4,070		4,515		6,050				
END OF 4FU341													
46	3,520		3,940		4,190		4,645		6,225				
48	3,640		4,075		4,330		4,805		6,440				
50	3,740		4,190		4,450		4,935		6,620				
52	3,860		4,325		4,595		5,095		6,835				

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32nd in)	RCI	SRI
14L-16.1SL	4FU368	TL	8	32	3,860	W11C	14.0	37.1	16.1	103	11	--	--
14L-16.1SL	4FU3L2	TL	14	52	5,200	W11C	14.0	37.1	16.1	103	11	--	--
Inflation Pressure (psi)	30 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)				
20	2,760		3,090		3,285		3,645		4,880				
22	2,910		3,260		3,465		3,840		5,150				
24	3,200		3,585		3,810		4,225		5,665				
26	3,300		3,695		3,925		4,355		5,840				
28	3,520		3,940		4,190		4,645		6,225				
30	3,640		4,075		4,330		4,805		6,440				
32	3,860		4,325		4,595		5,095		6,835				
END OF 4FU368													
34	3,960		4,435		4,710		5,225		7,005				
38	4,300		4,815		5,115		5,675		7,610				
42	4,540		5,085		5,405		5,995		8,035				
44	4,680		5,240		5,570		6,180		8,280				
46	4,800		5,375		5,710		6,335		8,495				
50	5,080		5,690		6,045		6,705		8,990				
52	5,200		5,825		6,190		6,865		9,205				



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32nd in)	RCI	SRI
16.5L-16.1SL	4FU3L1	TL	14	48	6,400	W14C, W14CH	16.2	39.6	17.6	116	13	--	--
Inflation Pressure (psi)		30 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)			
24		3,960		4,435		4,710		5,225		7,005			
28		4,400		4,930		5,235		5,810		7,790			
32		4,800		5,375		5,710		6,335		8,495			
36		5,200		5,825		6,190		6,865		9,205			
40		5,680		6,360		6,760		7,500		10,050			
44		6,000		6,720		7,140		7,920		10,620			
48		6,400		7,170		7,615		8,450		11,330			

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32nd in)	RCI	SRI
21.5L-16.1SL	4FU3J1	TL	14	36	7,850	W16C, W16CH, W18C, W18CH	21.9	43.7	18.3	117	15	--	--
Inflation Pressure (psi)		30 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)			
20		5,200		5,825		6,190		6,865		9,205			
24		6,000		6,720		7,140		7,920		10,620			
26		6,400		7,170		7,615		8,450		11,330			
30		6,950		7,785		8,270		9,175		12,300			
32		7,150		8,010		8,510		9,440		12,655			
34		7,600		8,510		9,045		10,030		13,445			
36		7,850		8,790		9,340		10,360		13,890			





GOODYEAR FARM HIGHWAY SERVICE FI

- D.O.T. approved for highway use
- Designed for implements and wagons transported intermittently at highway speeds
- Flotation and load carrying capacity of Farm Service (SL) and highway speed characteristics of (LT) tire



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
9.5L-15FI	4HS313	TL	D	60	2,680	8LB	10.1	30.1	13.9	90	11	--	--

Inflation Pressure (psi)	62 mph (lbs)	Duals	30 mph (lbs)	Duals
30	1,760	1,550	2,110	1,855
35	1,930	1,700	2,315	2,035
40	2,090	1,840	2,510	2,210
45	2,270	2,000	2,725	2,400
50	2,400	2,110	2,880	2,535
55	2,540	2,235	3,050	2,685
60	2,680	2,360	3,215	2,830

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
10.00-15FI	4HS3L1	TL	D	60	3,960	8LB	10.8	33.9	15.0	99	11	--	--

Inflation Pressure (psi)	62 mph (lbs)	Duals	30 mph (lbs)	Duals
30	2,680	2,360	3,215	2,830
35	2,910	2,560	3,490	3,070
40	3,080	2,710	3,695	3,250
45	3,300	2,905	3,960	3,485
50	3,520	3,100	4,225	3,720
55	3,740	3,290	4,490	3,950
60	3,960	3,485	4,750	4,180


Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
14L-16.1FI	4HS3F3	TL	D	45	4,290	W11C	14.0	37.1	16.1	103	13	--	--

Inflation Pressure (psi)	62 mph (lbs)	Duals	30 mph (lbs)	Duals
20	2,680	2,360	3,215	2,830
25	3,080	2,710	3,695	3,250
30	3,420	3,010	4,105	3,610
35	3,740	3,290	4,490	3,950
40	3,960	3,485	4,750	4,180
45	4,290	3,775	5,150	4,530



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
16.5L-16.1FI	4HS3E0	TL	E	60	6,450	W14C, W14CH	16.7	40.2	18.2	119	14	--	--

Inflation Pressure (psi)	62 mph (lbs)	Duals	30 mph (lbs)	Duals
30	4,300	3,785	5,160	4,540
35	4,680	4,120	5,615	4,940
40	5,080	4,470	6,095	5,365
45	5,520	4,860	6,625	5,830
50	5,840	5,140	7,010	6,170
55	6,150	5,410	7,380	6,495
60	6,450	5,675	7,740	6,810

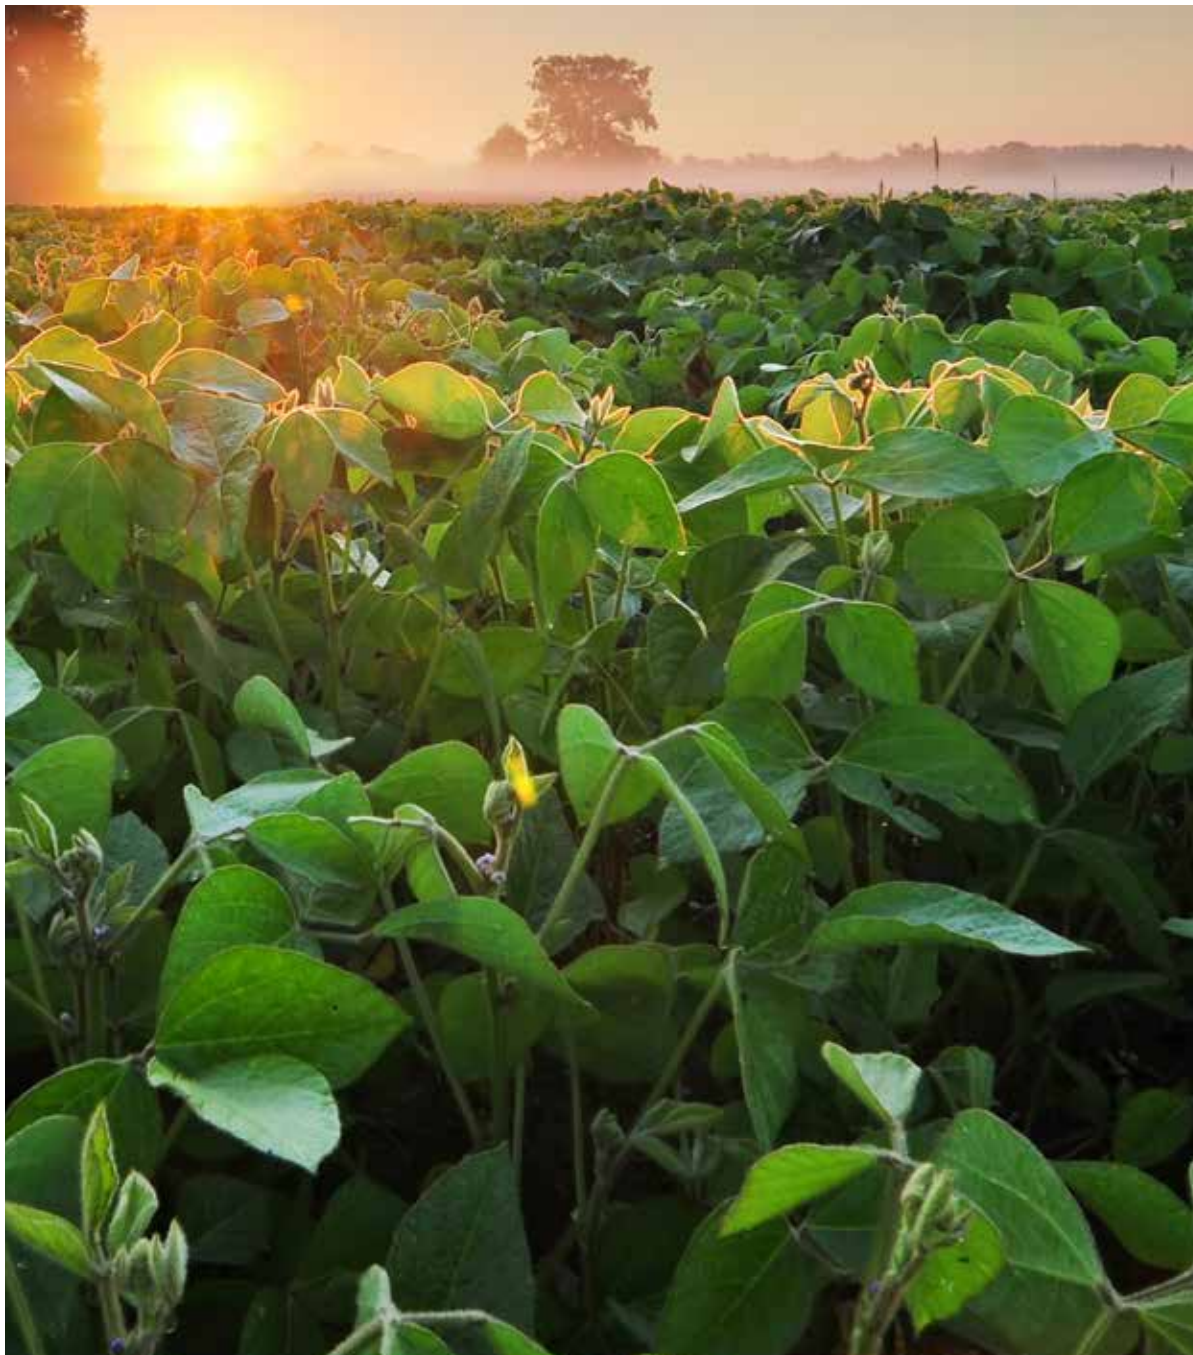



GOODYEAR FARM HIGHWAY SERVICE II FI

- Rounder shape sidewall for improved durability
- Flatter tread profile to increase contact area
- Large radius tread grooves to reduce groove cracking
- D.O.T. approved for highway use



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
11L-15FI	HS2386	TL	D	60	3,080	8J, 8LB, 8 1/2J, 10LB	10.5	30.9	14.1	92	10	--	
11L-15FI	HS2392	TL	F	90	3,960	8J, 8LB, 8 1/2J, 10LB	10.4	31.1	14.3	93	10	--	
Inflation Pressure (psi)		62 mph (lbs)		Duals		30 mph (lbs)		Duals					
30		2,090		1,840		2,510		2,210					
35		2,270		2,000		2,725		2,400					
40		2,470		2,175		2,965		2,610					
45		2,600		2,290		3,120		2,745					
50		2,830		2,490		3,395		2,990					
55		3,000		2,640		3,600		3,170					
60		3,080		2,710		3,695		3,250					
END OF HS2386													
70		3,420		3,010		4,105		3,610					
75		3,520		3,100		4,225		3,720					
85		3,860		3,395		4,630		4,075					
90		3,960		3,485		4,750		4,180					

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
12.5L-15FI	HS2363	TL	D	60	3,740	10LB	12.8	32.5	15.1	98	10	--	--
12.5L-15FI	HS2387	TL	F	90	4,680	10LB	12.8	32.6	15.0	97	10	--	--
Inflation Pressure (psi)		62 mph (lbs)		Duals		30 mph (lbs)		Duals					
30		2,470		2,175		2,965		2,610					
35		2,680		2,360		3,215		2,830					
40		2,910		2,560		3,490		3,070					
45		3,080		2,710		3,695		3,250					
50		3,300		2,905		3,960		3,485					
55		3,520		3,100		4,225		3,720					
60		3,740		3,290		4,490		3,950					
END OF HS2363													
70		4,080		3,590		4,895		4,310					
75		4,180		3,680		5,015		4,415					
85		4,540		3,995		5,450		4,795					
90		4,680		4,120		5,615		4,940					



GOODYEAR SUPERFLOT I-3

- Designed for high flotation for tillage, hay, and liquid fertilizer tanks
- Radial construction for rugged performance applications
- Designed for free roll or light ground traction applications



Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
600/50R22.5IMP	SPF4ET	TL	168B	46	12,300	AG20.00	23.2	47.3	19.7	139	31	--	--
			156B		8,800		23.2	47.2	21.2	141			
Inflation Pressure (psi)		30 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)			
12		4,800		5,135		5,330		6,430		7,200			
17		6,150		6,580		6,825		8,240		9,225			
23		7,600		8,130		8,435		10,185		11,400			
29		8,800		9,415		9,770		11,790		13,200			
35		10,200		10,915		11,320		13,670		15,300			
41		11,400		12,200		12,655		15,275		17,100			
46		12,300		13,160		13,655		16,480		18,450			

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
710/40R22.5IMP	SPF4ES	TL	170B	46	13,200	AG24.00	27.2	47.0	19.8	138	31	--	--
			158B		9,350		27.1	47.1	20.4	141			
Inflation Pressure (psi)		30 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)			
12		5,080		5,435		5,640		6,805		7,620			
17		6,600		7,060		7,325		8,845		9,900			
23		8,050		8,615		8,935		10,785		12,075			
29		9,350		10,005		10,380		12,530		14,025			
35		10,700		11,450		11,875		14,340		16,050			
41		12,300		13,160		13,655		16,480		18,450			
46		13,200		14,125		14,650		17,690		19,800			





GOODYEAR SURE GRIP TRACTION I-3

- Ruler straight lugs for grip with even, steady pull
- Excellent cleanability provided by the open tread center
- Aggressive lug design



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
6.70-15SL	4TG267	TT	4	32	1,280	4 1/2KB, 5KB	6.7	28.8	13.5	87	16	--	--


Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
20	935	990	1,045	1,115	1,235	1,475
22	990	1,050	1,110	1,180	1,305	1,565
24	1,070	1,135	1,200	1,275	1,410	1,690
26	1,140	1,210	1,275	1,355	1,505	1,800
28	1,170	1,240	1,310	1,390	1,545	1,850
30	1,230	1,305	1,380	1,465	1,625	1,945
32	1,280	1,355	1,435	1,525	1,690	2,020

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
7.60-15SL	4TG338	TL	10	64	2,400	6LB	8.1	30.0	13.7	89	16	--	--

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
20	1,100	1,165	1,230	1,310	1,450	1,740
24	1,230	1,305	1,380	1,465	1,625	1,945
28	1,390	1,475	1,555	1,655	1,835	2,195
32	1,520	1,610	1,700	1,810	2,005	2,400
36	1,650	1,750	1,850	1,965	2,180	2,605
40	1,760	1,865	1,970	2,095	2,325	2,780
44	1,870	1,980	2,095	2,225	2,470	2,955
48	1,980	2,100	2,220	2,355	2,615	3,130
52	2,090	2,215	2,340	2,485	2,760	3,300
56	2,200	2,330	2,465	2,620	2,905	3,475
60	2,270	2,405	2,540	2,700	2,995	3,585
64	2,400	2,545	2,690	2,855	3,170	3,790

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
12.5L-15SL	4TG305	TL	12	52	3,860	10LB	11.7	33.5	15.1	99	22	--	--

See Next Page for the Load & Inflation Table



4TG305 LOAD & INFLATION TABLE

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
28	2,540	2,690	2,845	3,025	3,355	4,015
32	2,760	2,925	3,090	3,285	3,645	4,360
36	3,000	3,180	3,360	3,570	3,960	4,740
40	3,200	3,390	3,585	3,810	4,225	5,055
44	3,420	3,625	3,830	4,070	4,515	5,405
48	3,640	3,860	4,075	4,330	4,805	5,750
52	3,860	4,090	4,325	4,595	5,095	6,100

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
16.5L-16.1SL	4TG327	TL	6	24	3,960	W14C, W14CH	16.4	42.3	18.6	123	26	--	--

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
20	3,520	3,730	3,940	4,190	4,645	5,560
22	3,740	3,965	4,190	4,450	4,935	5,910
24	3,960	4,200	4,435	4,710	5,225	6,255

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
21.5L-16.1SL	4TG3M3	TL	8	24	6,000	W16C, W16CH, W18C, W18CH	21.2	45.0	20.3	133	32	--	--
21.5L-16.1SL	4TG362	TL	14	36	7,850	W16C, W16CH, W18C, W18CH	21.6	43.6	18.6	121	32	--	--

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
20	5,200	5,510	5,825	6,190	6,865	8,215
22	5,680	6,020	6,360	6,760	7,500	8,975
24	6,000	6,360	6,720	7,140	7,920	9,480

END OF 4TG3M3						
26	6,400	6,785	7,170	7,615	8,450	10,110
28	6,600	6,995	7,390	7,855	8,710	10,430
30	6,950	7,365	7,785	8,270	9,175	10,980
32	7,150	7,580	8,010	8,510	9,440	11,295
34	7,600	8,055	8,510	9,045	10,030	12,010
36	7,850	8,320	8,790	9,340	10,360	12,405





GOODYEAR TRACTION IMPLEMENT I-3

- Traction design for implement service



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
5.00-15SL	4T1335	TL	4	36	965	3.00D	5.1	25.8	12.0	78	15	--	--
Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)							
20	640	680	715	760	845	1,010							
22	675	715	755	805	890	1,065							
26	760	805	850	905	1,005	1,200							
28	805	855	900	960	1,065	1,270							
30	855	905	960	1,015	1,130	1,350							
32	880	935	985	1,045	1,160	1,390							
36	965	1,025	1,080	1,150	1,275	1,525							

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
5.90-15SL	4T1353	TL	4	36	1,140	4 1/2KB, 5KB	6.2	26.7	12.4	80	15	--	--
Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)							
20	740	785	830	880	975	1,170							
22	805	855	900	960	1,065	1,270							
26	910	965	1,020	1,085	1,200	1,440							
28	935	990	1,045	1,115	1,235	1,475							
30	990	1,050	1,110	1,180	1,305	1,565							
32	1,050	1,115	1,175	1,250	1,385	1,660							
36	1,140	1,210	1,275	1,355	1,505	1,800							



GOODYEAR CONTRACTOR-T I-3

- An implement tire specially designed for high traction applications
- Frequently used on the front of backhoes



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32" in)	RCI	SRI
12.5/80-18NHS	46W39N	TL	6	28	3,420	9, W9, 11	12.0	38.4	17.7	114	31	--	--

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	10 mph (lbs)	5 mph (lbs)
20	2,410	2,680	3,000	3,565	3,750
22	2,620	2,910	3,260	3,870	4,075
24	2,770	3,080	3,450	4,095	4,310
26	2,880	3,200	3,585	4,255	4,480
28	3,080	3,420	3,830	4,550	4,790





GOODYEAR SOFTRAC HF-1

- Button tread design
- Wide footprint with excellent traction
- Low ground bearing pressure
- Good for turf applications



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
25x8.50-14NHS	4SR327	TL	6	32	1,640	6.0AT, 6.5AT, 7.00-1-55, 1-70, 1-90, 7KB, 7.0AT	8.8	25.7	12.1	78	9	--	--
Inflation Pressure (psi)	10 mph (lbs)		15 mph (lbs)		20 mph (lbs)		25 mph (lbs)		30 mph (lbs)				
18	1,170		1,110		1,055		995		935				
20	1,230		1,170		1,105		1,045		985				
22	1,320		1,255		1,190		1,120		1,055				
24	1,390		1,320		1,250		1,180		1,110				
26	1,430		1,360		1,285		1,215		1,145				
28	1,520		1,445		1,370		1,290		1,215				
30	1,570		1,490		1,415		1,335		1,255				
32	1,640		1,560		1,475		1,395		1,310				

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
25x10.00-12NHS	4RS321	TL	6	32	1,980	6.0AT, 6JA, 6.5AT, 7.0AT, 7JA, 7.5AT, 8.0AT, 8.5AT, 8 1/2JA	9.3	24.7	10.7	71	9	--	--
Inflation Pressure (psi)	10 mph (lbs)		15 mph (lbs)		20 mph (lbs)		25 mph (lbs)		30 mph (lbs)				
18	1,430		1,360		1,285		1,215		1,145				
20	1,520		1,445		1,370		1,290		1,215				
22	1,610		1,530		1,450		1,370		1,290				
24	1,650		1,570		1,485		1,405		1,320				
26	1,760		1,670		1,585		1,495		1,410				
28	1,820		1,730		1,640		1,545		1,455				
30	1,930		1,835		1,735		1,640		1,545				
32	1,980		1,880		1,780		1,685		1,585				

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
25x10.50-15NHS	4SR6WQ	TL	6	45	1,230	8LB	10.5	25.2	11.8	77	9	--	--
Inflation Pressure (psi)	30 mph (lbs)		25 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)		
10	505		535		565		600		665		800		
15	640		680		715		760		845		1,010		
20	760		805		850		905		1,005		1,200		
25	855		905		960		1,015		1,130		1,350		
30	965		1,025		1,080		1,150		1,275		1,525		
35	1,050		1,115		1,175		1,250		1,385		1,660		
40	1,140		1,210		1,275		1,355		1,505		1,800		
45	1,230		1,305		1,380		1,465		1,625		1,945		



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
31x15.50-15NHS	4SR35B	TL	4	20	1,710	13LB	15.2	30.6	14.1	91	13	--	--
Inflation Pressure (psi)	30 mph (lbs)			25 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)	
10	1,140			1,210		1,275		1,355		1,505		1,800	
15	1,430			1,515		1,600		1,700		1,890		2,260	
20	1,710			1,815		1,915		2,035		2,255		2,700	

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
33x12.50-15NHS	4SR3M0	TL	4	20	2,090	10LB	12.9	34.0	15.4	100	12	--	--
Inflation Pressure (psi)	30 mph (lbs)			25 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)	
10	1,430			1,515		1,600		1,700		1,890		2,260	
15	1,760			1,865		1,970		2,095		2,325		2,780	
20	2,090			2,215		2,340		2,485		2,760		3,300	

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
38x14.00-20NHS	4SR462	TL	4	25	2,340	W11, W11H	14.2	38.5	17.8	115	16	--	--
Inflation Pressure (psi)	30 mph (lbs)			25 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)	
10	1,390			1,475		1,555		1,655		1,835		2,195	
15	1,760			1,865		1,970		2,095		2,325		2,780	
20	2,090			2,215		2,340		2,485		2,760		3,300	
25	2,340			2,480		2,620		2,785		3,090		3,695	





GOODYEAR TUNDRA-GRIP HF-1

- Reduced vibration in field and road service
- Improved traction from its three-pitch tread design
- Longer body life provided by its natural shape casing



Tire Size	Catalog #	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32nd in)	RCI	SRI
66x44.00-25NHS	TG4636	TL	6	151B	15	7,600	36.0TH	45.8	66.7	29.6	195	12	--	--
				160A3		9,900		45.8	66.7	28.5	N/A			
66x44.00-25NHS	TG4B36	TL	20	176B	50	15,700	36.0TH	44.0	66.5	29.4	194	12	--	--
				185A3		20,400		N/A	66.5	N/A	N/A			
66x44.00-25NHS	TG4T36	TL	26	181B	65	18,200	36.0TH	45.0	68.9	31.5	205	12	--	--
				191A3		24,000		45.0	68.9	30.8	202			

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
10	6,000	6,360	6,720	7,140	7,920	10,620
15	7,600	8,055	8,510	9,045	10,030	13,445
END OF TG4636						
20	9,100	9,645	10,190	10,830	12,010	16,100
25	10,200	10,810	11,425	12,140	13,465	18,050
30	11,400	12,085	12,770	13,565	15,050	20,175
35	12,800	13,570	14,335	15,230	16,895	22,650
40	13,600	14,415	15,230	16,185	17,950	24,065
45	14,300	15,160	16,015	17,015	18,875	25,305
50	15,700	16,640	17,585	18,685	20,725	27,785
END OF TG4B36						
55	16,500	17,490	18,480	19,635	21,780	29,200
60	17,100	18,125	19,150	20,350	22,570	30,255
65	18,200	19,290	20,385	21,660	24,025	32,210



GOODYEAR SFT105 HF-1

- Specially designed for turf applications
- Minimum soil disturbance
- Low inflation operating pressures



Tire Size	Catalog #	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32nd in)	RCI	SRI
54x31.00-26NHS	45F032	TL	10	147B	30	6,800	DW25B	28.7	54.6	23.9	158	13	--	--

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service			
						Inflation Pressure (psi)	20 mph (lbs)	10 mph (lbs)	6 mph (lbs)
10	3,520	3,940	4,190	4,645	6,225	15	5,280	6,510	7,040
15	4,540	5,085	5,405	5,995	7,120	20	6,810	8,400	9,080
20	5,360	6,005	6,380	7,075	8,405	25	8,040	9,915	10,720
25	6,150	6,890	7,320	8,120	9,645	30	9,225	11,380	12,300
30	6,800	7,615	8,090	8,975	10,660	35	10,200	12,580	13,600



GOODYEAR TERRA-RIB HF-1

- Minimal ground disturbance
- Grooves for lateral traction



Tire Size	Catalog #	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
31x13.50-15NHS	TR4397	TL	8	114B	45	2,600	10LB	13.4	32.1	14.8	96	12	--	--
				123A3		3,420		13.4	32.1	14.5				
31x13.50-15NHS	TR4597	TL	12	134A3/124B	75	3,520	10LB	13.6	32.0	13.9	90	12	--	--

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
10	1,100	1,165	1,230	1,310	1,450	1,945
15	1,390	1,475	1,555	1,655	1,835	2,455
20	1,650	1,750	1,850	1,965	2,180	2,925
25	1,870	1,980	2,095	2,225	2,470	3,310
30	2,090	2,215	2,340	2,485	2,760	3,695
35	2,270	2,405	2,540	2,700	2,995	4,015
40	2,470	2,620	2,765	2,940	3,260	4,370
45	2,600	2,755	2,910	3,095	3,430	4,600
END OF TR4397						
50	2,760	2,925	3,090	3,285	3,645	4,880
55	2,910	3,085	3,260	3,465	3,840	5,150
60	3,080	3,265	3,450	3,665	4,065	5,450
65	3,300	3,500	3,695	3,925	4,355	5,840
70	3,420	3,625	3,830	4,070	4,515	6,050
75	3,520	3,730	3,940	4,190	4,645	6,225

TERRA-RIB; RIB TERRA



GOODYEAR RIB TERRA HF-1

- Minimal ground disturbance
- Grooves for lateral traction



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
18x9.50-8NHS	RTR171	TT	10	60	1,775	7.00-I-55, I-70, I-90	9.1	17.5	7.9	52	10	--	--

Inflation Pressure (psi)	10 mph (lbs)	15 mph (lbs)	20 mph (lbs)	25 mph (lbs)	30 mph (lbs)
32	1,230	1,170	1,105	1,045	775
36	1,320	1,255	1,190	1,120	830
40	1,390	1,320	1,250	1,180	875
44	1,480	1,405	1,330	1,260	930
48	1,570	1,490	1,415	1,335	990
52	1,650	1,570	1,485	1,405	1,040
56	1,710	1,625	1,540	1,455	1,075
60	1,775	1,685	1,600	1,510	1,120

BIAS & RADIAL HF-1, HF-2, HF-3



GOODYEAR SUPER TERRA-GRIP HF-2

- For low pressure flotation applications
- Provides lateral traction
- Lug design for traction in a flotation design



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32nd in)	RCI	SRI
29x12.50-15NHS	STGC20	TL	6	30	1,710	10LB	12.3	28.7	13.4	86	20	--	--
29x12.50-15NHS	STGD20	TL	8	45	2,150	10LB	12.0	29.3	13.6	88	20	--	--
END OF STGC20													
Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)							
10	880	935	985	1,045	1,160	1,555							
15	1,140	1,210	1,275	1,355	1,505	2,015							
20	1,320	1,400	1,480	1,570	1,740	2,340							
25	1,520	1,610	1,700	1,810	2,005	2,685							
30	1,710	1,815	1,915	2,035	2,255	3,025							
35	1,820	1,930	2,040	2,165	2,400	3,225							
40	1,980	2,100	2,220	2,355	2,615	3,510							
45	2,150	2,280	2,410	2,560	2,840	3,810							

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32nd in)	RCI	SRI
38x14.00-20NHS	STG416	TL	8	50	3,540	W11, W11H	14.3	39.3	18.6	119	25	--	--
Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)							
10	1,390	1,475	1,555	1,655	1,835	2,455							
15	1,760	1,865	1,970	2,095	2,325	3,115							
20	2,090	2,215	2,340	2,485	2,760	3,695							
25	2,340	2,480	2,620	2,785	3,090	4,140							
30	2,600	2,755	2,910	3,095	3,430	4,600							
35	2,830	3,000	3,170	3,370	3,735	5,010							
40	3,080	3,265	3,450	3,665	4,065	5,450							
45	3,300	3,500	3,695	3,925	4,355	5,840							
50	3,540	3,750	3,965	4,215	4,675	6,265							

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32nd in)	RCI	SRI
38x20.00-16.1NHS	STG398	TL	8	35	4,400	W16C, W16CH	19.3	38.5	17.5	114	25	--	--

See Next Page for the Load & Inflation Table



STG398 LOAD & INFLATION TABLE

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
10	2,090	2,215	2,340	2,485	2,760	3,695
15	2,680	2,840	3,000	3,190	3,540	4,740
20	3,080	3,265	3,450	3,665	4,065	5,450
25	3,520	3,730	3,940	4,190	4,645	6,225
30	3,960	4,200	4,435	4,710	5,225	7,005
35	4,400	4,665	4,930	5,235	5,810	7,790

Tire Size	Catalog #	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
66x43.00-25NHS	STG9F3	TL	20	174B	50	14,800	36.0TH	41.4	66.5	29.4	197	61	--	--
				183A3	N/A	N/A		N/A	N/A	N/A	N/A			
66x43.00-25NHS	STGTF3	TL	26	180B	65	17,600	36.0TH	41.9	66.6	31.3	199	61	--	--
				189A3	N/A	N/A		N/A	66.6	N/A	N/A			

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
20	8,800	9,330	9,855	10,470	11,615	15,570
25	9,900	10,495	11,090	11,780	13,070	17,520
30	11,000	11,660	12,320	13,090	14,520	19,465
35	12,300	13,040	13,775	14,635	16,235	21,765
40	13,200	13,990	14,785	15,710	17,425	23,360
45	13,900	14,735	15,570	16,540	18,350	24,600
50	14,800	15,690	16,575	17,610	19,535	26,190
END OF STG9F3						
55	15,700	16,640	17,585	18,685	20,725	27,785
60	16,500	17,490	18,480	19,635	21,780	29,200
65	17,600	18,655	19,710	20,945	23,230	31,140





GOODYEAR XTRA-TRAC HF-2

- Designed for excellent traction



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
31x15.50-15NHS	XTR3A8	TL	8	45	2,760	13LB	14.7	31.8	14.4	94	23	--	--
Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)							
10	1,140	1,210	1,275	1,355	1,505	2,015							
15	1,430	1,515	1,600	1,700	1,890	2,530							
20	1,710	1,815	1,915	2,035	2,255	3,025							
25	1,930	2,045	2,160	2,295	2,550	3,415							
30	2,150	2,280	2,410	2,560	2,840	3,810							
35	2,340	2,480	2,620	2,785	3,090	4,140							
40	2,540	2,690	2,845	3,025	3,355	4,495							
45	2,760	2,925	3,090	3,285	3,645	4,880							



GOODYEAR SUPER TERRA-GRIP XT HF-2, HF-3

- Reduced vibration in field and road service
- Improved traction from its three-pitch tread design
- Longer body life provided by its natural shape casing



Tire Size	Catalog #	Industry Code	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
48x31.00R20	4RG2T2	HF-3	TL	150A8/B	45	7,400	26.00HF, 26.00VF	29.8	49.1	22.3	149	57	--	--
Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)								
20	4,680	4,960	5,240	5,570	6,180	8,280								
25	5,360	5,680	6,005	6,380	7,075	9,490								
30	5,840	6,190	6,540	6,950	7,710	10,335								
35	6,400	6,785	7,170	7,615	8,450	11,330								
40	6,950	7,365	7,785	8,270	9,175	12,300								
45	7,400	7,845	8,290	8,805	9,770	13,100								

Tire Size	Catalog #	Industry Code	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
66x43.00-25NHS	STX5F4	HF-2	TL	16	170B 179A3	40	13,200 17,100	36.0TH	41.5 N/A	67.4 67.4	31.8 N/A	201 N/A	79	44	--
Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)									
20	8,800	9,330	9,855	10,470	11,615	15,570									
25	9,900	10,495	11,090	11,780	13,070	17,520									
30	11,000	11,660	12,320	13,090	14,520	19,465									
35	12,300	13,040	13,775	14,635	16,235	21,765									
40	13,200	13,990	14,785	15,710	17,425	23,360									



GOODYEAR SURE GRIP LUG SS, R-4, I-3

- Good choice for industrial equipment
- Directional design for excellent traction and long wear
- For use in soft soil operations where traction and flotation are required



Tire Size	Catalog #	Industry Code	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
27x8.50-15NHS	4GL339	SS	TL	6	45	2,480	7JA	8.7	27.4	12.6	82	18	--	--
Inflation Pressure (psi)	5 mph (lbs)	10 mph (lbs)	20 mph (lbs)	25 mph (lbs)	30 mph (lbs)									
10	1,010	845	715	665	640									
15	1,270	1,065	900	840	805									
20	1,525	1,275	1,080	1,005	965									
25	1,740	1,450	1,230	1,150	1,100									
30	1,945	1,625	1,380	1,285	1,230									
35	2,085	1,740	1,480	1,375	1,320									
40	2,260	1,890	1,600	1,490	1,430									
45	2,480	2,070	1,760	1,635	1,570									

Tire Size	Catalog #	Industry Code	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
12.4-16	4GL483	R-4	TL	4	20	2,090	W10L, 10LB	12.8	37.0	17.0	110	30	--	--
Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)								
12	1,265	1,390	1,485	1,545	1,865	2,085								
14	1,430	1,570	1,680	1,745	2,105	2,355								
16	1,600	1,760	1,885	1,955	2,360	2,640								
18	1,755	1,930	2,065	2,140	2,585	2,895								
20	1,900	2,090	2,235	2,320	2,800	3,135								

Tire Size	Catalog #	Industry Code	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
12.5/80-18	4GL5J9	I-3	TL	14	62	6,600	9, W9, 11	12.0	39.7	17.7	116	31	--	--
Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)								
20	2,680	2,840	3,000	3,190	3,540	4,235								
26	3,200	3,390	3,585	3,810	4,225	5,055								
32	3,740	3,965	4,190	4,450	4,935	5,910								
38	4,180	4,430	4,680	4,975	5,520	6,605								
44	4,540	4,810	5,085	5,405	5,995	7,175								
50	4,940	5,235	5,535	5,880	6,520	7,805								
56	5,360	5,680	6,005	6,380	7,075	8,470								
62	6,600	6,995	7,390	7,855	8,710	10,430								





GOODYEAR SURE GRIP LOADER SS

- Good choice for industrial equipment
- Directional design for excellent traction and long wear
- Wide, sturdy overlapping lugs
- Good fit for soft soil operations where traction and flotation are required



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
15-19.5NHS	4GL3H9	TL	8	40	7,250	11.75, 12.25	15.6	39.6	17.5	115	26	--	--

Inflation Pressure (psi)	5 mph (lbs)	10 mph (lbs)	20 mph (lbs)	25 mph (lbs)	30 mph (lbs)
20	4,835	3,820	3,290	3,190	3,045
25	5,510	4,355	3,745	3,635	3,470
30	6,130	4,845	4,170	4,045	3,860
35	6,705	5,295	4,560	4,425	4,225
40	7,250	5,730	4,930	4,785	4,570





GOODYEAR SMOOTH

- Specialty service tire for use on paving equipment and rollers



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
16.9-30	3SC679	TL	6	18	3,740	W14L, DW14A, DW14L, W15L, DW15A, DW15L	18.1	57.9	26.5	172	20	--	--

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
							Inflation Pressure (psi)	6 mph (lbs)
12	2,730	3,000	3,210	3,330	4,020	4,500	16	5,100
14	3,005	3,300	3,530	3,665	4,420	4,950	18	5,610
16	3,205	3,520	3,765	3,905	4,715	5,280	20	5,985
18	3,405	3,740	4,000	4,150	5,010	5,610	24	6,360



GOODYEAR SMOOTH IMPLEMENT



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
11L-15SL	3SM319	TL	10	44	2,910	8LB, 10LB	10.3	30.1	N/A	N/A	12	--	--

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
20	1,710	1,915	2,035	2,255	2,700
24	1,930	2,160	2,295	2,550	3,050
28	2,150	2,410	2,560	2,840	3,395
32	2,340	2,620	2,785	3,090	3,695
36	2,540	2,845	3,025	3,355	4,015
40	2,760	3,090	3,285	3,645	4,360
44	2,910	3,260	3,465	3,840	4,600





GOODYEAR POWER CUSHION TRAILER SERVICE



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
23x8.50-12NHS	PCT182	TT	12	68	2,170	7.00-I-70, I-90	8.1	23.2	10.7	69	10	--	--
Inflation Pressure (psi)	10 mph (lbs)	15 mph (lbs)	20 mph (lbs)	25 mph (lbs)	30 mph (lbs)								
28	1,280	1,215	1,150	1,090	1,025								
34	1,430	1,360	1,285	1,215	1,145								
42	1,650	1,570	1,485	1,405	1,320								
46	1,710	1,625	1,540	1,455	1,370								
50	1,820	1,730	1,640	1,545	1,455								
58	1,980	1,880	1,780	1,685	1,585								
64	2,090	1,985	1,880	1,775	1,670								
68	2,170	2,060	1,955	1,845	1,735								



TITAN FARM TIRES



 **TITAN**



TITAN FARM TIRES TABLE OF CONTENTS

Index by Size	162	Bias FI	
Tread Patterns	166	Titan Highway Implement FI.....	233
Bias & Radial R-1		Bias & Radial HF-1, HF-2	
Titan Hi-Dration Lug R-1.....	168	Titan Flo-Trac Rib HF-1.....	235
Titan Hi-Traction Lug Radial R-1.....	169	Titan Multi Trac C/S HF-1.....	237
Titan Hi-Traction Lug R-1.....	173	Titan Soft-Turf HF-1.....	243
Titan Hi-Power Lug R-1.....	184	Titan LSW430 HF-1.....	244
Titan Lift Rigger II R-1.....	187	Titan Flo-Trac Lug HF-2.....	245
Titan Farm Tractor R-1.....	187	Titan Tru Power II HF-2.....	246
Titan TT415 R-1.....	189	Skid Steer	
Titan WHO Big Show R-1.....	189	Titan Contractor FWD SS.....	247
Titan Tru Power R-1.....	190	Titan HD 2000 SS.....	248
Radial R-1W		Titan HD 2000 II SS.....	251
Titan AgraEDGE R-1W.....	192	Titan Trac Loader Chevron SS.....	253
Titan TT49V R-1W.....	201	Titan Trac Loader SS.....	253
Titan AG49M Radial R-1W.....	202	Titan TGS2 SS.....	257
Bias & Radial R-3, R-4		Titan LSW G9A SS.....	257
Titan Torc-Trac R-3.....	203	Titan Ultimate SS.....	258
Titan Torc-Trac II Radial R-3.....	205	Titan Soft-Turf SS.....	259
Titan Torc-Trac II R-3.....	206	Titan H/E SS.....	260
Titan Multi Trac C/S R-3.....	208		
Titan Industrial Contractor R-4.....	209		
Titan Industrial Tractor Lug R-4.....	209		
Bias F-2, F-2M, F-3			
Titan Tru-Trac Front Tractor F-2.....	213		
Titan Tru-Trac Multi-Rib F-2M.....	215		
Titan Contractor F-3.....	217		
Bias I-1, I-3			
Titan Packer I-1.....	218		
Titan Dura-Life I-1.....	219		
Titan Dura-Life Planter I-1.....	221		
Titan Stubble Guard I-1.....	221		
Titan Hi-Flotation I-1.....	223		
Titan AgraGROW I-3.....	227		
Titan Contractor-T I-3.....	230		
Titan Contractor II I-3.....	231		
Titan TI422 I-3.....	231		
Titan Traction Implement I-3.....	232		

TITAN FARM TIRES INDEX BY SIZE

RADIAL			
Inch	Tire Size	Tread Pattern	Pg.
343mm	LSW305R343NHS	LSW430 HF-1	244
470mm	LSW610R470NHS	LSW430 HF-1	244
546mm	LSW305-546NHS	LSW G9A SS	257
22.5"	500/60R22.5IMP	AgraGROW I-3	227
22.5"	560/45R22.5IMP	AgraGROW I-3	227
22.5"	560/60R22.5IMP	AgraGROW I-3	227
22.5"	600/50R22.5IMP	AgraGROW I-3	228
22.5"	710/40R22.5IMP	AgraGROW I-3	228
22.5"	710/45R22.5IMP	AgraGROW I-3	229
24"	320/85R24	AgraEDGE R-1W	193
24"	340/85R24	AgraEDGE R-1W	193
24"	380/85R24	AgraEDGE R-1W	194
24"	380/85R24	Hi-Dratlon Lug R-1	169
26"	28LR26	Torc-Trac II Radial R-3	205
26"	420/85R26	AgraEDGE R-1W	195
26.5"	600/55R26.5IMP	AgraGROW I-3	228
26.5"	650/55R26.5IMP	AgraGROW I-3	228
26.5"	710/50R26.5IMP	AgraGROW I-3	229
28"	340/85R28	AgraEDGE R-1W	193
28"	380/85R28	Hi-Traction Lug Radial R-1	169
28"	380/85R28	AgraEDGE R-1W	194
28"	420/85R28	AgraEDGE R-1W	196
30"	380/85R30	Hi-Traction Lug Radial R-1	169
30"	380/85R30	AgraEDGE R-1W	194
30"	420/90R30	AgraEDGE R-1W	196
30"	460/85R30	AgraEDGE R-1W	197
30"	480/70R30	AgraEDGE R-1W	198
30"	600/70R30	AgraEDGE R-1W	200
32"	24.5R32	Hi-Traction Lug Radial R-1	172
32"	24.5R32	Torc-Trac II Radial R-3	205
32"	650/75R32	AgraEDGE R-1W	200
32"	30.5LR32	Torc-Trac II Radial R-3	206
34"	380/85R34	Hi-Traction Lug Radial R-1	170
34"	380/85R34	AgraEDGE R-1W	195
34"	420/85R34	AgraEDGE R-1W	196
34"	460/85R34	AgraEDGE R-1W	197
38"	290/85R38	Hi-Dratlon Lug R-1	168
38"	320/85R38	TT49V R-1W	201
38"	380/80R38	AgraEDGE R-1W	193
38"	420/85R38	AgraEDGE R-1W	196
38"	460/85R38	AgraEDGE R-1W	197
38"	520/85R38	AgraEDGE R-1W	199
38"	710/70R38	AG49M Radial R-1W	202
38"	800/70R38	AgraEDGE R-1W	201
42"	480/80R42	Hi-Traction Lug Radial R-1	170
42"	480/80R42	AgraEDGE R-1W	198
42"	520/85R42	Hi-Traction Lug Radial R-1	171

RADIAL			
Inch	Tire Size	Tread Pattern	Pg.
42"	520/85R42	AgraEDGE R-1W	199
46"	380/90R46	AgraEDGE R-1W	195
46"	380/90R46	Hi-Traction Lug Radial R-1	170
46"	480/80R46	Hi-Traction Lug Radial R-1	171
46"	480/80R46	AgraEDGE R-1W	198
46"	520/85R46	AgraEDGE R-1W	199
46"	620/70R46	AgraEDGE R-1W	200
50"	480/80R50	AgraEDGE R-1W	199

BIAS			
Inch	Tire Size	Tread Pattern	Pg.
521mm	LSW305-521NHS	Soft-Turf HF-1	243
648mm	LSW570-648NHS	Soft-Turf HF-1	243
10"	18x8.50-10NHS	Multi Trac C/S HF-1	237
10"	18x8.50-10NHS	Trac Loader SS	254
10"	20x8.00-10NHS	Multi Trac C/S HF-1	237
10"	20x8.00-10NHS	HD 2000 II SS	252
12"	5-12	Tru Power R-1	190
12"	6-12	Tru Power R-1	190
12"	180/85D12	Tru Power R-1	191
12"	20.5x5.5-12	Packer I-1	218
12"	23x8.50-12NHS	Multi Trac C/S HF-1	238
12"	23x8.50-12NHS	HD 2000 SS	249
12"	23x8.50-12NHS	Trac Loader SS	255
12"	26x12.00-12NHS	Trac Loader SS	255
12"	26x12.00-12NHS	Multi Trac C/S HF-1	239
12"	26x12.00-12NHS	Tru Power II HF-2	246
14"	7-14	Hi-Traction Lug R-1	173
14"	9.5L-14SL	Hi-Flotation I-1	223
14"	23x8.50-14NHS	Trac Loader SS	255
14"	24x8.50-14NHS	Multi Trac C/S HF-1	238
14"	25x8.50-14NHS	Trac Loader SS	255
14"	25x8.50-14NHS	Multi Trac C/S HF-1	238
15"	5.90-15SL	Dura-Life I-1	219
15"	6.70-15SL	Dura-Life I-1	219
15"	7.00-15SS	Trac Loader Chevron SS	253
15"	7.5L-15SL	Tru-Trac Front Tractor F-2	214
15"	9.5L-15SL	Tru-Trac Front Tractor F-2	215
15"	9.5L-15SL	Tru-Trac Multi-Rib F-2M	216
15"	9.5L-15SL	Stubble Guard I-1	221
15"	9.5L-15SL	Hi-Flotation I-1	223
15"	9.5L-15FI	Highway Implement FI	233
15"	10.00-15SL	Stubble Guard I-1	222
15"	11L-15SL	Tru-Trac Multi-Rib F-2M	216
15"	11L-15SL	Stubble Guard I-1	222
15"	11L-15SL	Hi-Flotation I-1	224
15"	12.5L-15SL	Stubble Guard I-1	222

BIAS			
Inch	Tire Size	Tread Pattern	Pg.
15"	12.5L-15SL	Hi-Flotation I-1	224
15"	13.50-15FI	Highway Implement FI	233
15"	25x7.50-15NHS	Flo-Trac Rib HF-1	235
15"	25x10.50LL-15	Soft-Turf HF-1	243
15"	26/6.50-15	Packer I-1	218
15"	26/7.75-15	Packer I-1	218
15"	27x8.50-15NHS	Multi Trac C/S HF-1	239
15"	27x8.50-15NHS	HD 2000 SS	249
15"	27x8.50-15NHS	Trac Loader SS	256
15"	27x9.50-15NHS	Flo-Trac Rib HF-1	235
15"	27x10.50-15NHS	Multi Trac C/S HF-1	240
15"	27x10.50-15NHS	Trac Loader SS	256
15"	27x10.50-15NHS	HD 2000 SS	250
15"	27x12LL-15NHS	Soft-Turf HF-1	243
15"	27x12.50-15NHS	Trac Loader SS	256
15"	28x8.50-15NHS	Multi Trac C/S HF-1	240
15"	28x8.50-15NHS	Trac Loader SS	256
15"	29x12.50-15NHS	Multi Trac C/S HF-1	240
15"	31x13.50-15NHS	Flo-Trac Rib HF-1	235
15"	31x13.50-15IMP	Multi Trac C/S HF-1	241
15"	31x13.50-15NHS	Multi Trac C/S HF-1	241
15"	31x15.50-15NHS	Flo-Trac Lug HF-2	245
15"	36x13.50-15NHS	Multi Trac C/S HF-1	242
16"	5.50-16SL	Tru-Trac Front Tractor F-2	213
16"	6.00-16SL	Tru-Trac Front Tractor F-2	213
16"	6.50-16SL	Tru-Trac Front Tractor F-2	213
16"	6.50-16SL	Dura-Life I-1	219
16"	7-16	Hi-Traction Lug R-1	173
16"	7.50-16SL	Tru-Trac Front Tractor F-2	214
16"	7.50-16SL	Tru-Trac Multi-Rib F-2M	215
16"	8-16	Hi-Traction Lug R-1	173
16"	9.00-16SL	Dura-Life I-1	220
16"	9.5-16	Hi-Traction Lug R-1	174
16"	12.5L-16SL	Hi-Flotation I-1	224
16"	11L-16SL	Contractor F-3	217
16"	13.6-16	Multi Trac C/S R-3	208
16"	320/85D16	Tru Power R-1	191
16.1"	13.50-16.1SL	Traction Implement I-3	232
16.1"	14L-16.1SL	Hi-Flotation I-1	225
16.1"	14.5/75-16.1SL	Contractor F-3	217
16.1"	16.5L-16.1SL	Tru-Trac Multi-Rib F-2M	216
16.1"	16.5L-16.1SL	Hi-Flotation I-1	225
16.1"	16.5L-16.1FI	Highway Implement FI	234
16.1"	18.4-16.1	Hi-Traction Lug R-1	180
16.1"	19L-16.1SL	Hi-Flotation I-1	226
16.1"	21.5L-16.1SL	Multi Trac C/S R-3	208
16.1"	21.5L-16.1SL	Hi-Flotation I-1	226
16.1"	35x19.00-16.1	Flo-Trac Lug HF-2	245
16.5"	10-16.5NHS	HD 2000 SS	248
16.5"	10-16.5NHS	HD 2000 II SS	251
16.5"	10-16.5NHS	Trac Loader SS	253

BIAS			
Inch	Tire Size	Tread Pattern	Pg.
16.5"	10-16.5NHS	Ultimate SS	258
16.5"	10-16.5NHS	H/E SS	260
16.5"	12-16.5NHS	Contractor FWD SS	247
16.5"	12-16.5NHS	HD 2000 SS	248
16.5"	12-16.5NHS	HD 2000 II SS	251
16.5"	12-16.5NHS	Trac Loader SS	254
16.5"	12-16.5NHS	TGS2 SS	257
16.5"	12-16.5NHS	Ultimate SS	258
16.5"	12-16.5NHS	Soft-Turf SS	259
16.5"	12-16.5NHS	H/E SS	260
16.5"	31x15.50-16.5	HD 2000 II SS	252
16.5"	33x12.50-16.5	Multi Trac C/S HF-1	241
16.5"	33x15.50-16.5	Torc-Trac R-3	204
16.5"	33x15.50-16.5	HD 2000 II SS	252
17"	480/45-17	Contractor F-3	217
17.5"	14-17.5NHS	Contractor FWD SS	247
17.5"	14-17.5NHS	HD 2000 SS	248
17.5"	14-17.5NHS	HD 2000 II SS	251
17.5"	14-17.5NHS	Trac Loader SS	254
17.5"	14-17.5NHS	Ultimate SS	258
17.5"	14-17.5NHS	Soft-Turf SS	259
17.5"	14-17.5NHS	H/E SS	260
18"	7.50-18SL	Tru-Trac Front Tractor F-2	214
18"	10.5/80-18	Contractor-T I-3	230
18"	12.5/80-18	Contractor-T I-3	230
18"	12.5/80-18	Contractor II I-3	231
18"	12.5/80-18NHS	TI422 I-3	231
19.5"	15-19.5NHS	Contractor FWD SS	247
19.5"	15-19.5NHS	HD 2000 SS	249
19.5"	15-19.5NHS	Trac Loader SS	254
20"	7.50-20SL	Tru-Trac Front Tractor F-2	214
20"	7.50-20SL	Dura-Life Planter I-1	221
20"	7.50-20SL	Traction Implement I-3	232
20"	9.5-20	Hi-Traction Lug R-1	174
20"	38x18.00-20NHS	Flo-Trac Lug HF-2	245
20"	41x14.00-20NHS	Multi Trac C/S HF-1	242
20"	43x16.00-20NHS	Trac Loader SS	257
20"	44x18.00-20NHS	Multi Trac C/S HF-1	242
20"	400/70-20	Lift Rigger II R-1	187
24"	7.50-24SL	Traction Implement I-3	232
24"	9.00-24SL	Dura-Life I-1	220
24"	9.5-24	Hi-Traction Lug R-1	175
24"	11.2-24	Hi-Traction Lug R-1	175
24"	11.2-24	Hi-Power Lug R-1	184
24"	12.4-24	Hi-Traction Lug R-1	176
24"	13.6-24	Hi-Traction Lug R-1	177
24"	14.9-24	Hi-Traction Lug R-1	177
24"	14.9-24	Hi-Power Lug R-1	185
24"	14.9-24	Torc-Trac R-3	203
24"	14.9-24	Industrial Tractor Lug R-4	209
24"	16.9-24	Hi-Traction Lug R-1	178

BIAS			
Inch	Tire Size	Tread Pattern	Pg.
24"	16.9-24	Torc-Trac R-3	203
24"	16.9-24	Industrial Tractor Lug R-4	210
24"	17.5L-24	Industrial Contractor R-4	209
24"	17.5L-24	Industrial Tractor Lug R-4	210
24"	18.4-24	Industrial Tractor Lug R-4	211
24"	19.5L-24	Industrial Tractor Lug R-4	211
24"	21L-24	Industrial Tractor Lug R-4	212
24"	380/85D24	Hi-Dration Lug R-1	168
24"	420/70-24	Industrial Tractor Lug R-4	210
26"	14.9-26	Hi-Power Lug R-1	186
26"	16.9-26	Hi-Traction Lug R-1	178
26"	18.4-26	Hi-Traction Lug R-1	180
26"	18.4-26	Torc-Trac R-3	203
26"	18.4-26	Industrial Tractor Lug R-4	211
26"	23.1-26	Torc-Trac R-3	204
26"	23.1-26	Hi-Traction Lug R-1	182
26"	23.1-26	Torc-Trac II R-3	207
26"	28LL-26	Torc-Trac II R-3	207
26"	23.5L/55-26	TT415 R-1	189
26"	620/70D26	Torc-Trac II R-3	207
28"	11.2-28	Hi-Traction Lug R-1	175
28"	12.4-28	Hi-Traction Lug R-1	176
28"	13.6-28	Torc-Trac II R-3	206
28"	13.6-28	Hi-Traction Lug R-1	177
28"	14.9-28	Hi-Traction Lug R-1	177
28"	16.9-28	Hi-Traction Lug R-1	179
28"	18.4-28	Hi-Power Lug R-1	186

BIAS			
Inch	Tire Size	Tread Pattern	Pg.
28"	18.4-28	Industrial Tractor Lug R-4	211
30"	16.9-30	Hi-Traction Lug R-1	179
30"	18.4-30	Hi-Traction Lug R-1	181
30"	23.1-30	Hi-Power Lug R-1	186
32"	24.5-32	Hi-Traction Lug R-1	182
32"	24.5-32	Torc-Trac II R-3	207
32"	30.5L-32	Hi-Traction Lug R-1	183
32"	30.5L-32	Torc-Trac II R-3	208
34"	11.2-34	Farm Tractor R-1	187
34"	16.9-34	Hi-Traction Lug R-1	179
34"	18.4-34	Hi-Traction Lug R-1	181
34"	23.1-34	Hi-Traction Lug R-1	182
36"	11.2-36	Farm Tractor R-1	188
36"	12.4-36	Farm Tractor R-1	188
36"	13.9-36	Farm Tractor R-1	188
38"	11.2-38	Hi-Power Lug R-1	184
38"	12.4-38	WHO Big Show R-1	189
38"	12.4-38	Hi-Power Lug R-1	185
38"	13.6-38	Hi-Power Lug R-1	185
38"	13.6-38	WHO Big Show R-1	190
38"	14.9-38	Hi-Power Lug R-1	186
38"	15.5-38	Hi-Traction Lug R-1	178
38"	16.9-38	Hi-Traction Lug R-1	180
38"	18.4-38	Hi-Traction Lug R-1	181
38"	20.8-38	Hi-Traction Lug R-1	182
38"	290/85D38	Hi-Dration Lug R-1	168
42"	12.4-42	Hi-Traction Lug R-1	176



TITAN FARM TIRES TREAD PATTERNS

■ BIAS & RADIAL R-1 ■ RADIAL R-1W ■ BIAS & RADIAL R-3, R-4 ■ BIAS F-2, F-2M, F-3 ■ BIAS I-1, I-3



HI-DRATION LUG R-1
P. 168



HI-TRACTION LUG RADIAL R-1 P. 169



HI-TRACTION LUG R-1
P. 173



HI-POWER LUG R-1
P. 184



LIFT RIGGER II R-1
P. 187



FARM TRACTOR R-1
P. 187



TT415 R-1
P. 189



WHO BIG SHOW R-1
P. 189



TRU POWER R-1
P. 190



AGRAEDGE R-1W
P. 192



TT49V R-1W
P. 201



AG49M RADIAL R-1W
P. 202



TORC-TRAC R-3
P. 203



TORC-TRAC II RADIAL R-3 P. 205



TORC-TRAC II R-3
P. 206



MULTI TRAC C/S R-3
P. 208



INDUSTRIAL CONTRACTOR R-4 P. 209



INDUSTRIAL TRACTOR LUG R-4 P. 209



TRU-TRAC FRONT TRACTOR F-2 P. 213



TRU-TRAC MULTI-RIB F-2M P. 215



CONTRACTOR F-3
P. 217



PACKER I-1
P. 218



DURA-LIFE I-1
P. 219



DURA-LIFE PLANTER I-1
P. 221



STUBBLE GUARD I-1
P. 221



HI-FLOTATION I-1
P. 223



AGRAGROW I-3
P. 227



CONTRACTOR-T I-3
P. 230



CONTRACTOR II I-3
P. 231



TI422 I-3
P. 231



**TRACTION
IMPLEMENT I-3** P. 232



HIGHWAY IMPLEMENT FI
P. 233



FLO-TRAC RIB HF-1
P. 235



MULTI TRAC C/S HF-1
P. 237




SOFT-TURF HF-1
P. 243



LSW430 HF-1
P. 244



FLO-TRAC LUG HF-2
P. 245



TRU POWER II HF-2
P. 246



CONTRACTOR FWD SS
P. 247



HD 2000 SS
P. 248



HD 2000 II SS
P. 251



**TRAC LOADER
CHEVRON SS** P. 253



TRAC LOADER SS
P. 253




TGS2 SS
P. 257



LSW G9A SS
P. 257



ULTIMATE SS
P. 258



SOFT-TURF SS
P. 259



H/E SS
P. 260

■ BIAS FI ■ BIAS I-1, I-3
■ BIAS & RADIAL HF-1, HF-2
■ SKID STEER



TITAN HI-DRATION LUG R-1

- Non-directional pattern provides maximum traction both forward and reverse
- Rugged 0-degree bar with supported lug center for superior durability
- Self-Cleaning
- For use on linear and pivot irrigation systems



Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
290/85D38	HLB408	TL	132CREEP	23	4,410	W10	11.4	58.0	26.4	172	43	--	--

Inflation Pressure (psi)						Creep (lbs)							
13						3,120							
16						3,480							
18						3,710							
21						4,070							
23						4,410							

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
290/85R38	HLR208	TL	142CREEP	23	5,840	W10	11.1	58.1	25.4	173	43	--	--

Inflation Pressure (psi)						Creep (lbs)							
12						3,300							
15						3,960							
17						4,680							
20						5,360							
23						5,840							

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
380/85D24	HLB634	TL	145CREEP	26	6,400	W11, W12, W13	15.2	49.6	21.6	143	47	--	--

Inflation Pressure (psi)						Creep (lbs)							
13						4,180							
16						4,640							
18						5,060							
21						5,490							
23						5,970							
26						6,400							



Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI	
380/85R24	HLR234	TL	149CREEP	23	7,150	W11, W12, W13	14.5	50.1	20.5	146	47	--	--	
				Inflation Pressure (psi)					Creep (lbs)					
				12					3,960					
				15					4,800					
				17					5,520					
				20					6,150					
				23					7,150					



TITAN HI-TRACTION LUG RADIAL R-1

- Superior traction and side-hill slip resistance
- Combines long bar/medium bar traction for cleanability, smooth ride and more power to the ground



Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
380/85R28	48E438	TL	133A8/B	23	4,540	W11, W12, W13	14.6	54.7	24.7	165	50	40	650
Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service							
						Inflation Pressure (psi)	6 mph (lbs)						
9	2,235	2,390	2,480	2,995	3,355	15	3,800						
12	2,910	3,115	3,230	3,900	4,365	17	4,945						
15	3,300	3,530	3,665	4,420	4,950	20	5,610						
17	3,740	4,000	4,150	5,010	5,610	23	6,360						
20	4,180	4,475	4,640	5,600	6,270	26	7,105						
23	4,540	4,860	5,040	6,085	6,810	29	7,720						

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
380/85R30	48E430	TL	135A8/B	23	4,800	W11, W12, W13, DW13A	16.0	56.2	25.6	169	50	41	675
Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service							
						Inflation Pressure (psi)	6 mph (lbs)						
9	2,290	2,450	2,540	3,070	3,435	15	3,895						
12	3,000	3,210	3,330	4,020	4,500	17	5,100						
15	3,420	3,660	3,795	4,585	5,130	20	5,815						
17	3,860	4,130	4,285	5,170	5,790	23	6,560						
20	4,300	4,600	4,775	5,760	6,450	26	7,310						
23	4,800	5,135	5,330	6,430	7,200	29	8,160						





HI-TRACTION LUG RADIAL

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
380/85R34	48E435	TL	137A8/B	23	5,080	W11, W12, W13	15.5	60.6	27.9	185	52	42	725

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
						Inflation Pressure (psi)	6 mph (lbs)
9	2,430	2,600	2,695	3,255	3,645	15	4,130
12	3,200	3,425	3,550	4,290	4,800	17	5,440
15	3,640	3,895	4,040	4,880	5,460	20	6,190
17	4,080	4,365	4,530	5,465	6,120	23	6,935
20	4,540	4,860	5,040	6,085	6,810	26	7,720
23	5,080	5,435	5,640	6,805	7,620	29	8,635

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
380/90R46	48ED32	TL	149A8/B	35	7,150	W12A, W12B, W13A, W13B, DW13A, DW13B	14.8	73.1	34.2	224	50	46	925
380/90R46	48E032	TL	168A8/B	78	12,300	W12A, W12B, W13A, W13B, DW13A, DW13B	15.1	72.5	33.8	221	50	46	925

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
						Inflation Pressure (psi)	6 mph (lbs)
15	3,870	4,140	4,295	5,185	5,805	20	6,580
17	5,080	5,435	5,640	6,805	7,620	23	8,635
20	5,520	5,905	6,125	7,395	8,280	26	9,385
23	6,150	6,580	6,825	8,240	9,225	29	10,455
26	6,400	6,850	7,105	8,575	9,600	33	10,880
29	6,800	7,275	7,550	9,110	10,200	36	11,560
32	6,950	7,435	7,715	9,315	10,425	41	11,815
35	7,150	7,650	7,935	9,580	10,725	44	12,155
END OF 48ED32							
38	7,600	8,130	8,435	10,185	11,400	48	12,920
44	8,250	8,830	9,160	11,055	12,375	55	14,025
49	8,800	9,415	9,770	11,790	13,200	61	14,960
55	9,350	10,005	10,380	12,530	14,025	67	15,895
61	9,900	10,595	10,990	13,265	14,850	73	16,830
67	10,700	11,450	11,875	14,340	16,050	78	18,190
73	11,700	12,520	12,985	15,680	17,550	84	19,890
78	12,300	13,160	13,655	16,480	18,450	90	20,910

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
480/80R42	48E442	TL	151A8/B	23	7,600	W14L, DW14L, W15L, DW15L, W16A, W16L, DW16A, DW16L, DD16	18.9	74.4	33.9	225	53	46	875
480/80R42	48E942	TL	166A8/B	58	11,700	W14L, DW14L, W15L, DW15L, W16A, W16L, DW16A, DW16L, DD16	19.3	73.1	33.6	220	53	46	875

See Next Page for the Load & Inflation Table



48E442 & 48E942 LOAD & INFLATION TABLE

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
						Inflation Pressure (psi)	6 mph (lbs)
9	3,590	3,840	3,985	4,810	5,385	15	6,105
12	4,800	5,135	5,330	6,430	7,200	17	8,160
15	5,520	5,905	6,125	7,395	8,280	20	9,385
17	6,150	6,580	6,825	8,240	9,225	23	10,455
20	6,950	7,435	7,715	9,315	10,425	26	11,815
23	7,600	8,130	8,435	10,185	11,400	29	12,920
END OF 48E442							
26	8,050	8,615	8,935	10,785	12,075	33	13,685
29	8,250	8,830	9,160	11,055	12,375	36	14,025
35	8,800	9,415	9,770	11,790	13,200	44	14,960
41	9,650	10,325	10,710	12,930	14,475	51	16,405
46	10,500	11,235	11,655	14,070	15,750	58	17,850
52	11,000	11,770	12,210	14,740	16,500	64	18,700
58	11,700	12,520	12,985	15,680	17,550	70	19,890

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
480/80R46	48E547	TL	158A8/B	35	9,350	W14L, DW14L, W15L, DW15L, W16A, W16L, DW16A, DW16L, DD16	18.6	78.0	35.4	236	53	47	975

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
						Inflation Pressure (psi)	6 mph (lbs)
9	3,785	4,050	4,200	5,070	5,680	15	6,435
12	5,080	5,435	5,640	6,805	7,620	17	8,635
15	5,680	6,080	6,305	7,610	8,520	20	9,655
17	6,400	6,850	7,105	8,575	9,600	23	10,880
20	7,150	7,650	7,935	9,580	10,725	26	12,155
23	7,850	8,400	8,715	10,520	11,775	29	13,345
26	8,250	8,830	9,160	11,055	12,375	33	14,025
29	8,550	9,150	9,490	11,455	12,825	36	14,535
32	9,100	9,735	10,100	12,195	13,650	41	15,470
35	9,350	10,005	10,380	12,530	14,025	44	15,895

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
520/85R42	48E452	TL	157A8/B	23	9,100	W15L, W16A, W16L, DW16A, DW16L, DD16, DD16L, W18A, W18L, DW18A, DW18B, DD18, DD18L	21.3	76.8	34.7	232	55	47	925

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
						Inflation Pressure (psi)	6 mph (lbs)
9	4,345	4,650	4,825	5,820	6,520	15	7,385
12	5,680	6,080	6,305	7,610	8,520	17	9,655
15	6,600	7,060	7,325	8,845	9,900	20	11,220
17	7,400	7,920	8,215	9,915	11,100	23	12,580
20	8,250	8,830	9,160	11,055	12,375	26	14,025
23	9,100	9,735	10,100	12,195	13,650	29	15,470





HI-TRACTION LUG RADIAL

Tire Size	Catalog #	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
24.5R32	48E599	TL	5*	169A8/B	38	12,800	DW21B, DH21, DH21B, DH21H, DH21HB	25.3	70.6	31.6	211	56	45	875
Inflation Pressure (psi)							Cyclic Service							
	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Inflation Pressure (psi)	6 mph (lbs)							
8	5,080	5,435	5,640	6,805	7,620	14	8,635							
10	5,840	6,250	6,480	7,825	8,760	16	9,930							
12	6,400	6,850	7,105	8,575	9,600	17	10,880							
14	7,150	7,650	7,935	9,580	10,725	20	12,155							
16	7,600	8,130	8,435	10,185	11,400	22	12,920							
18	8,250	8,830	9,160	11,055	12,375	24	14,025							
20	8,800	9,415	9,770	11,790	13,200	26	14,960							
22	9,100	9,735	10,100	12,195	13,650	28	15,470							
26	10,200	10,915	11,320	13,670	15,300	33	17,340							
30	11,000	11,770	12,210	14,740	16,500	38	18,700							
34	12,000	12,840	13,320	16,080	18,000	42	20,400							
38	12,800	13,695	14,210	17,150	19,200	48	21,760							





TITAN HI-TRACTION LUG R-1

- Exclusive long bar/medium bar tread pattern
- This design follows a symmetrical lug pattern to eliminate side-to-side rocking and promotes even wear



Tire Size	Catalog #	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
7-14	48D665	TL	6	80A6	36	990	5JA, 5KB	7.6	27.5	12.9	83	33	--	330

Inflation Pressure (psi)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
12	470	520	555	675	730
18	595	660	705	860	925
24	705	785	840	1,020	1,100
28	770	855	915	1,110	1,195
30	820	910	975	1,185	1,275
32	840	935	1,000	1,215	1,310
34	870	965	1,035	1,255	1,350
36	890	990	1,060	1,285	1,385

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
7-16	48D666	TL	6	36	1,100	6.00F, 6L, 6LB	7.5	29.8	13.8	89	29	--	350

Inflation Pressure (psi)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
12	525	585	625	760	820
18	665	740	790	960	1,035
24	770	855	915	1,110	1,195
28	840	935	1,000	1,215	1,310
30	890	990	1,060	1,285	1,385
32	920	1,020	1,090	1,325	1,430
34	945	1,050	1,125	1,365	1,470
36	990	1,100	1,175	1,430	1,540

Tire Size	Catalog #	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
8-16	48D667	TL	6	91A6	28	1,360	6.00F, 6L, 6LB	8.4	31.1	14.4	93	31	--	390
8-16	48D067	TL	10	102A6	48	1,870	6.00F, 6L, 6LB	8.2	31.8	14.7	95	31	--	390

See Next Page for the Load & Inflation Table





HI-TRACTION LUG

48D667 & 48D067 LOAD & INFLATION TABLE

Inflation Pressure (psi)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
14	820	910	975	1,185	1,275
16	890	990	1,060	1,285	1,385
18	965	1,070	1,145	1,390	1,500
20	1,025	1,140	1,220	1,480	1,595
22	1,080	1,200	1,285	1,560	1,680
24	1,105	1,230	1,315	1,600	1,720
26	1,190	1,320	1,410	1,715	1,850
28	1,225	1,360	1,455	1,770	1,905
END OF 48D667					
32	1,330	1,480	1,585	1,925	2,070
36	1,450	1,610	1,725	2,095	2,255
40	1,540	1,710	1,830	2,225	2,395
44	1,585	1,760	1,885	2,290	2,465
48	1,685	1,870	2,000	2,430	2,620

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
9.5-16	48D695	TL	6	30	1,390	W8L, 8LB	9.7	33.6	15.7	101	40	31	400

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
10 (Duals)	590	650	695	720	870	975	14	1,105	1,215
12	750	825	885	915	1,105	1,240	16	1,405	1,545
16	880	965	1,035	1,070	1,295	1,450	20	1,640	1,805
20	1,000	1,100	1,175	1,220	1,475	1,650	26	1,870	2,055
22	1,065	1,170	1,250	1,300	1,570	1,755	28	1,990	2,190
24	1,120	1,230	1,315	1,365	1,650	1,845	32	2,090	2,300
28	1,240	1,360	1,455	1,510	1,820	2,040	36	2,310	2,545
30	1,265	1,390	1,485	1,545	1,865	2,085	40	2,365	2,600

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
9.5-20	48D663	TL	6	30	1,650	W7B, W7L, W8B	9.3	37.5	17.3	112	41	--	450

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
10 (Duals)	685	750	805	835	1,005	1,125	14	1,275	1,405
12	880	965	1,035	1,070	1,295	1,450	16	1,640	1,805
16	1,035	1,140	1,220	1,265	1,530	1,710	20	1,940	2,130
20	1,165	1,280	1,370	1,420	1,715	1,920	26	2,175	2,395
22	1,240	1,360	1,455	1,510	1,820	2,040	28	2,310	2,545
24	1,300	1,430	1,530	1,585	1,915	2,145	32	2,430	2,675
28	1,430	1,570	1,680	1,745	2,105	2,355	36	2,670	2,935
30	1,500	1,650	1,765	1,830	2,210	2,475	40	2,805	3,085



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
9.5-24	48D694	TL	6	30	1,870	W7, W8, W8H	9.3	41.6	19.6	126	41	35	500

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
10 (Duals)	790	870	930	965	1,165	1,305	14	1,480	1,625
12	1,000	1,100	1,175	1,220	1,475	1,650	16	1,870	2,055
16	1,165	1,280	1,370	1,420	1,715	1,920	20	2,175	2,395
20	1,345	1,480	1,585	1,645	1,985	2,220	26	2,515	2,770
22	1,430	1,570	1,680	1,745	2,105	2,355	28	2,670	2,935
24	1,500	1,650	1,765	1,830	2,210	2,475	32	2,805	3,085
26	1,555	1,710	1,830	1,900	2,290	2,565	34	2,905	3,200
28	1,655	1,820	1,945	2,020	2,440	2,730	36	3,095	3,405

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
11.2-24	48D404	TL	4	18	1,650	W9, W10, W10H, W10L, DW10	11.4	44.0	20.5	132	43	36	525
11.2-24	48D804	TL	8	36	2,540	W9, W10, W10H, W10L, DW10	11.4	44.3	20.8	134	43	36	525
11.2-24	48D004	TL	10	44	2,830	W9, W10, W10H, W10L, DW10	11.5	44.5	20.9	135	43	36	525

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
10 (Duals)	960	1,055	1,130	1,170	1,415	1,585	14	1,795	1,975
12	1,200	1,320	1,410	1,465	1,770	1,980	16	2,245	2,470
14	1,300	1,430	1,530	1,585	1,915	2,145	18	2,430	2,675
16	1,430	1,570	1,680	1,745	2,105	2,355	20	2,670	2,935
18	1,500	1,650	1,765	1,830	2,210	2,475	24	2,805	3,085
END OF 48D404									
20	1,600	1,760	1,885	1,955	2,360	2,640	26	2,990	3,290
24	1,800	1,980	2,120	2,200	2,655	2,970	32	3,365	3,705
28	1,955	2,150	2,300	2,385	2,880	3,225	36	3,655	4,020
32	2,130	2,340	2,505	2,595	3,135	3,510	42	3,980	4,375
36	2,310	2,540	2,720	2,820	3,405	3,810	46	4,320	4,750
END OF 48D804									
40	2,440	2,680	2,870	2,975	3,590	4,020	52	4,555	5,010
44	2,575	2,830	3,030	3,140	3,790	4,245	58	4,810	5,290

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
11.2-28	48D410	TL	4	18	1,760	W9, W10, W10H, W10L, DW10	11.8	47.6	22.1	147	43	38	575

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
10 (Duals)	1,025	1,125	1,205	1,250	1,510	1,690	14	1,915	2,105
12	1,265	1,390	1,485	1,545	1,865	2,085	16	2,365	2,600
14	1,385	1,520	1,625	1,685	2,035	2,280	18	2,585	2,840
16	1,500	1,650	1,765	1,830	2,210	2,475	20	2,805	3,085
18	1,600	1,760	1,885	1,955	2,360	2,640	24	2,990	3,290





HI-TRACTION LUG

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
12.4-24	48D814	TL	8	32	2,830	W9, W10, W10H, W10L, DW10, W11, DW11	13.0	46.3	21.7	140	44	37	550

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
10 (Duals)	1,145	1,260	1,350	1,400	1,690	1,890	14	2,140	2,355
12	1,430	1,570	1,680	1,745	2,105	2,355	16	2,670	2,935
16	1,700	1,870	2,000	2,075	2,505	2,805	20	3,180	3,495
20	1,955	2,150	2,300	2,385	2,880	3,225	26	3,655	4,020
24	2,185	2,400	2,570	2,665	3,215	3,600	32	4,080	4,490
28	2,365	2,600	2,780	2,885	3,485	3,900	36	4,420	4,860
32	2,575	2,830	3,030	3,140	3,790	4,245	42	4,810	5,290

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
12.4-28	48D612	TL	6	24	2,540	W9, W10, W10H, W10L, DW10, W11, DW11	13.0	49.6	N/A	N/A	44	--	600

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
10 (Duals)	1,220	1,340	1,435	1,485	1,795	2,010	14	2,280	2,505
12	1,555	1,710	1,830	1,900	2,290	2,565	16	2,905	3,200
14	1,700	1,870	2,000	2,075	2,505	2,805	18	3,180	3,495
16	1,800	1,980	2,120	2,200	2,655	2,970	20	3,365	3,705
18	1,955	2,150	2,300	2,385	2,880	3,225	24	3,655	4,020
20	2,065	2,270	2,430	2,520	3,040	3,405	26	3,860	4,245
24	2,310	2,540	2,720	2,820	3,405	3,810	32	4,320	4,750

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
12.4-42	48D019	TL	10	40	4,180	W10, W10A	12.5	64.5	30.3	193	48	43	775

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
10 (Duals)	1,495	1,645	1,760	1,825	2,205	2,470	14	2,795	3,075
12	1,855	2,040	2,185	2,265	2,735	3,060	16	3,470	3,815
16	2,250	2,470	2,645	2,740	3,310	3,705	20	4,200	4,620
20	2,510	2,760	2,955	3,065	3,700	4,140	26	4,690	5,160
24	2,805	3,080	3,295	3,420	4,125	4,620	32	5,235	5,760
28	3,110	3,420	3,660	3,795	4,585	5,130	36	5,815	6,395
34	3,405	3,740	4,000	4,150	5,010	5,610	44	6,360	6,995
40	3,805	4,180	4,475	4,640	5,600	6,270	52	7,105	7,815





Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
13.6-24	48D822	TL	8	28	3,080	W10, W10L, DW10, W11, DW11, W12, DW12	14.7	47.8	22.4	144	46	38	575

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12 (Duals)	1,495	1,645	1,760	1,825	2,205	2,470	16	2,795	3,075
14	1,855	2,040	2,185	2,265	2,735	3,060	18	3,470	3,815
18	2,130	2,340	2,505	2,595	3,135	3,510	24	3,980	4,375
20	2,310	2,540	2,720	2,820	3,405	3,810	26	4,320	4,750
24	2,575	2,830	3,030	3,140	3,790	4,245	32	4,810	5,290
28	2,805	3,080	3,295	3,420	4,125	4,620	36	5,235	5,760

Tire Size	Catalog #	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
13.6-28	48D624	TL	6	117A8	22	2,830	W10, W10L, DW10, W11, DW11, W12, DW12	14.3	52.9	24.3	158	46	39	625

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12 (Duals)	1,585	1,740	1,860	1,930	2,330	2,610	16	2,960	3,255
14	2,000	2,200	2,355	2,440	2,950	3,300	18	3,740	4,115
16	2,130	2,340	2,505	2,595	3,135	3,510	20	3,980	4,375
18	2,310	2,540	2,720	2,820	3,405	3,810	24	4,320	4,750
20	2,440	2,680	2,870	2,975	3,590	4,020	26	4,555	5,010
22	2,575	2,830	3,030	3,140	3,790	4,245	28	4,810	5,290

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
14.9-24	48D634	TL	6	20	3,000	W11, DW11, W12, DW12, W13, DW13, DW13L	15.3	49.8	22.5	147	47	39	600
14.9-24	48D834	TL	8	26	3,520	W11, DW11, W12, DW12, W13, DW13, DW13L	15.4	50.7	23.3	151	47	39	600

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service						
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)				
12 (Duals)	1,760	1,935	2,070	2,150	2,595	2,905	16	3,290	3,620				
14	2,185	2,400	2,570	2,665	3,215	3,600	18	4,080	4,490				
16	2,365	2,600	2,780	2,885	3,485	3,900	20	4,420	4,860				
18	2,575	2,830	3,030	3,140	3,790	4,245	24	4,810	5,290				
20	2,730	3,000	3,210	3,330	4,020	4,500	26	5,100	5,610				
END OF 48D634													
22	2,910	3,200	3,425	3,550	4,290	4,800	28	5,440	5,985				
24	3,005	3,300	3,530	3,665	4,420	4,950	32	5,610	6,170				
26	3,205	3,520	3,765	3,905	4,715	5,280	34	5,985	6,580				

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
14.9-28	48D638	TL	6	20	3,200	W11, DW11, W12, DW12, W13, DW13, DW13L	15.2	54.7	25.0	162	47	40	650
14.9-28	48D038	TL	10	32	4,180	W11, DW11, W12, DW12, W13, DW13, DW13L	14.9	54.3	24.9	162	47	40	650

See Next Page for the Load & Inflation Table





HI-TRACTION LUG

48D638 & 48D038 LOAD & INFLATION TABLE

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12 (Duals)	1,875	2,060	2,205	2,285	2,760	3,090	16	3,500	3,850
14	2,365	2,600	2,780	2,885	3,485	3,900	18	4,420	4,860
16	2,575	2,830	3,030	3,140	3,790	4,245	20	4,810	5,290
18	2,730	3,000	3,210	3,330	4,020	4,500	24	5,100	5,610
20	2,910	3,200	3,425	3,550	4,290	4,800	26	5,440	5,985
END OF 48D638									
22	3,110	3,420	3,660	3,795	4,585	5,130	28	5,815	6,395
24	3,205	3,520	3,765	3,905	4,715	5,280	32	5,985	6,580
26	3,405	3,740	4,000	4,150	5,010	5,610	34	6,360	6,995
28	3,515	3,860	4,130	4,285	5,170	5,790	36	6,560	7,220
30	3,715	4,080	4,365	4,530	5,465	6,120	40	6,935	7,630
32	3,805	4,180	4,475	4,640	5,600	6,270	42	7,105	7,815

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
15.5-38	47D874	TT	8	26	4,080	W14L, DW14A	16.5	62.6	N/A	N/A	46	43	750

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12 (Duals)	2,085	2,290	2,450	2,540	3,070	3,435	16	3,895	4,280
14	2,575	2,830	3,030	3,140	3,790	4,245	18	4,810	5,290
18	3,005	3,300	3,530	3,665	4,420	4,950	24	5,610	6,170
22	3,405	3,740	4,000	4,150	5,010	5,610	28	6,360	6,995
26	3,715	4,080	4,365	4,530	5,465	6,120	34	6,935	7,630

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
16.9-24	48D645	TL	6	18	3,420	W14L, DW14L, W15L, DW15L	18.1	53.6	24.4	159	48	40	625
16.9-24	48D845	TL	8	24	4,080	W14L, DW14L, W15L, DW15L	17.8	53.0	24.0	157	48	40	625

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12 (Duals)	2,150	2,360	2,525	2,620	3,160	3,540	16	4,010	4,415
14 (Duals)	2,330	2,560	2,740	2,840	3,430	3,840	18	4,350	4,785
16	2,910	3,200	3,425	3,550	4,290	4,800	20	5,440	5,985
18	3,110	3,420	3,660	3,795	4,585	5,130	24	5,815	6,395
END OF 48D645									
20	3,310	3,640	3,895	4,040	4,880	5,460	26	6,190	6,805
22	3,515	3,860	4,130	4,285	5,170	5,790	28	6,560	7,220
24	3,715	4,080	4,365	4,530	5,465	6,120	32	6,935	7,630

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
16.9-26	48D046	TL	10	28	4,540	DW14A, W15L, DW15A	17.7	55.0	25.0	164	48	40	650

See Next Page for the Load & Inflation Table



48D046 LOAD & INFLATION TABLE

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12 (Duals)	2,210	2,430	2,600	2,695	3,255	3,645	16	4,130	4,545
14 (Duals)	2,465	2,710	2,900	3,010	3,630	4,065	18	4,605	5,070
18	3,205	3,520	3,765	3,905	4,715	5,280	24	5,985	6,580
20	3,405	3,740	4,000	4,150	5,010	5,610	26	6,360	6,995
24	3,805	4,180	4,475	4,640	5,600	6,270	32	7,105	7,815
28	4,130	4,540	4,860	5,040	6,085	6,810	36	7,720	8,490

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
16.9-28	48D648	TL	6	18	3,640	W14L, DW14L, W15L, DW15L	18.0	57.9	26.5	172	48	41	675
16.9-28	48D048	TL	10	28	4,680	W14L, DW14L, W15L, DW15L	18.0	57.6	26.3	171	48	41	675

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12 (Duals)	2,330	2,560	2,740	2,840	3,430	3,840	16	4,350	4,785
14 (Duals)	2,560	2,815	3,010	3,125	3,770	4,225	18	4,785	5,265
16	3,110	3,420	3,660	3,795	4,585	5,130	20	5,815	6,395
18	3,310	3,640	3,895	4,040	4,880	5,460	24	6,190	6,805
END OF 48D648									
20	3,515	3,860	4,130	4,285	5,170	5,790	26	6,560	7,220
22	3,715	4,080	4,365	4,530	5,465	6,120	28	6,935	7,630
24	3,915	4,300	4,600	4,775	5,760	6,450	32	7,310	8,040
26	4,130	4,540	4,860	5,040	6,085	6,810	34	7,720	8,490
28	4,260	4,680	5,010	5,195	6,270	7,020	36	7,955	8,750

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
16.9-30	48D679	TL	6	18	3,740	W14L, DW14A, DW14L, W15L, DW15A, DW15L	18.1	58.8	27.7	178	48	42	700
16.9-30	47D879	TT	8	24	4,400	W14L, DW14A, DW14L, W15L, DW15A, DW15L	18.2	60.1	28.0	181	48	42	700

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12 (Duals)	2,400	2,640	2,825	2,930	3,540	3,960	16	4,490	4,935
14 (Duals)	2,645	2,905	3,110	3,225	3,895	4,360	18	4,940	5,430
16	3,205	3,520	3,765	3,905	4,715	5,280	20	5,985	6,580
18	3,405	3,740	4,000	4,150	5,010	5,610	24	6,360	6,995
END OF 48D679									
20	3,605	3,960	4,235	4,395	5,305	5,940	26	6,730	7,405
22	3,805	4,180	4,475	4,640	5,600	6,270	28	7,105	7,815
24	4,005	4,400	4,710	4,885	5,895	6,600	32	7,480	8,230

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
16.9-34	47D844	TT	8	24	4,680	W14L, DW14A, DW14L, W15L, DW15L, DD15L	17.8	63.0	29.0	188	48	43	750

See Next Page for the Load & Inflation Table





HI-TRACTION LUG

47D844 LOAD & INFLATION TABLE

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12 (Duals)	2,560	2,815	3,010	3,125	3,770	4,225	16	4,785	5,265
14 (Duals)	2,740	3,010	3,220	3,340	4,035	4,515	18	5,115	5,630
16	3,405	3,740	4,000	4,150	5,010	5,610	20	6,360	6,995
18	3,605	3,960	4,235	4,395	5,305	5,940	24	6,730	7,405
22	4,130	4,540	4,860	5,040	6,085	6,810	28	7,720	8,490
24	4,260	4,680	5,010	5,195	6,270	7,020	32	7,955	8,750

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
16.9-38	47D820	TT	8	24	4,940	W14L, DW14A, DW14L, W15A, W15L, DW15L, DD15L	17.8	67.0	31.0	200	48	44	800

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12 (Duals)	2,645	2,905	3,110	3,225	3,895	4,360	16	4,940	5,430
14 (Duals)	2,915	3,205	3,430	3,560	4,295	4,810	18	5,450	5,995
18	3,805	4,180	4,475	4,640	5,600	6,270	24	7,105	7,815
20	4,130	4,540	4,860	5,040	6,085	6,810	26	7,720	8,490
22	4,370	4,800	5,135	5,330	6,430	7,200	28	8,160	8,975
24	4,495	4,940	5,285	5,485	6,620	7,410	32	8,400	9,240

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
18.4-16.1	48D890	TL	8	20	2,910	W16C, W16CH	19.3	45.7	20.9	136	50	--	525

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12 (Duals)	855	940	1,005	1,045	1,260	1,410	16	1,600	1,760
14 (Duals)	935	1,030	1,100	1,145	1,380	1,545	18	1,750	1,925
16	1,165	1,280	1,370	1,420	1,715	1,920	20	2,175	2,395
18	1,240	1,360	1,455	1,510	1,820	2,040	24	2,310	2,545
20	1,300	1,430	1,530	1,585	1,915	2,145	26	2,430	2,675

Tire Size	Catalog #	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
18.4-26	48D156	TL	12	142A8	32	5,840	W15L, DW15A, DW16A	19.1	58.6	26.7	174	50	41	700
18.4-26	48D756	TL	18	N/A	46	7,400	W15L, DW15A, DW16A	19.0	58.0	26.6	173	50	41	700

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12 (Duals)	2,645	2,905	3,110	3,225	3,895	4,360	16	4,940	5,430
14 (Duals)	2,915	3,205	3,430	3,560	4,295	4,810	18	5,450	5,995
16	3,605	3,960	4,235	4,395	5,305	5,940	20	6,730	7,405
20	4,130	4,540	4,860	5,040	6,085	6,810	26	7,720	8,490
24	4,495	4,940	5,285	5,485	6,620	7,410	32	8,400	9,240
28	5,025	5,520	5,905	6,125	7,395	8,280	36	9,385	10,320
32	5,315	5,840	6,250	6,480	7,825	8,760	42	9,930	10,920

END OF 48D156													
34	5,595	6,150	6,580	6,825	8,240	9,225	44	10,455	11,500				
38	6,005	6,600	7,060	7,325	8,845	9,900	50	11,220	12,340				
42	6,325	6,950	7,435	7,715	9,315	10,425	54	11,815	12,995				
46	6,735	7,400	7,920	8,215	9,915	11,100	60	12,580	13,840				



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
18.4-30	47D850	TT	8	20	4,800	W15L, DW15A, DW16A	19.7	61.3	N/A	N/A	50	--	750
18.4-30	48D150	TL	12	32	6,400	W15L, DW15A, DW16A	19.4	61.7	28.2	183	50	--	750

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service						
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)				
12 (Duals)	2,820	3,100	3,315	3,440	4,155	4,650	16	5,270	5,795				
14 (Duals)	3,090	3,395	3,635	3,770	4,550	5,095	18	5,770	6,350				
16	3,805	4,180	4,475	4,640	5,600	6,270	20	7,105	7,815				
18	4,130	4,540	4,860	5,040	6,085	6,810	24	7,720	8,490				
20	4,370	4,800	5,135	5,330	6,430	7,200	26	8,160	8,975				
END OF 47D850													
22	4,625	5,080	5,435	5,640	6,805	7,620	28	8,635	9,500				
24	4,880	5,360	5,735	5,950	7,180	8,040	32	9,110	10,025				
26	5,025	5,520	5,905	6,125	7,395	8,280	34	9,385	10,320				
28	5,315	5,840	6,250	6,480	7,825	8,760	36	9,930	10,920				
30	5,595	6,150	6,580	6,825	8,240	9,225	40	10,455	11,500				
32	5,825	6,400	6,850	7,105	8,575	9,600	42	10,880	11,970				

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
18.4-34	47D854	TT	8	20	5,080	W15L, DW15A, W16L, DW16A	19.4	65.8	30.2	196	50	44	800
18.4-34	48D054	TL	10	26	6,000	W15L, DW15A, W16L, DW16A	19.4	65.7	30.2	195	50	44	800

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service						
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)				
12 (Duals)	2,995	3,290	3,520	3,650	4,410	4,935	16	5,595	6,150				
14 (Duals)	3,350	3,680	3,940	4,085	4,930	5,520	18	6,255	6,880				
16	4,005	4,400	4,710	4,885	5,895	6,600	20	7,480	8,230				
18	4,370	4,800	5,135	5,330	6,430	7,200	24	8,160	8,975				
20	4,625	5,080	5,435	5,640	6,805	7,620	26	8,635	9,500				
END OF 47D854													
22	4,880	5,360	5,735	5,950	7,180	8,040	28	9,110	10,025				
24	5,170	5,680	6,080	6,305	7,610	8,520	32	9,655	10,620				
26	5,460	6,000	6,420	6,660	8,040	9,000	34	10,200	11,220				

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
18.4-38	47D877	TT	8	20	5,360	W15L, W16A, DD16	19.4	69.7	32.2	206	50	45	875

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12 (Duals)	3,170	3,485	3,730	3,870	4,670	5,230	16	5,925	6,515
14 (Duals)	3,520	3,870	4,140	4,295	5,185	5,805	18	6,580	7,235
16	4,260	4,680	5,010	5,195	6,270	7,020	20	7,955	8,750
18	4,625	5,080	5,435	5,640	6,805	7,620	24	8,635	9,500
20	4,880	5,360	5,735	5,950	7,180	8,040	26	9,110	10,025





HI-TRACTION LUG

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
20.8-38	47D889	TT	8	18	6,150	W18A, DW18A, DD18	22.4	73.9	33.7	219	51	46	875

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12 (Duals)	3,845	4,225	4,520	4,690	5,660	6,340	16	7,185	7,900
14 (Duals)	4,290	4,715	5,045	5,235	6,320	7,075	18	8,015	8,815
16	5,170	5,680	6,080	6,305	7,610	8,520	20	9,655	10,620
18	5,595	6,150	6,580	6,825	8,240	9,225	24	10,455	11,500

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
23.1-26	48D186	TL	12	24	7,150	DW20B	24.3	64.5	28.8	189	52	43	750
23.1-26	48D586	TL	16	34	8,800	DW20B	24.1	64.3	28.9	187	52	43	750

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12 (Duals)	3,845	4,225	4,520	4,690	5,660	6,340	16	7,185	7,900
14 (Duals)	4,165	4,575	4,895	5,080	6,130	6,865	18	7,780	8,555
16	5,170	5,680	6,080	6,305	7,610	8,520	20	9,655	10,620
20	5,825	6,400	6,850	7,105	8,575	9,600	26	10,880	11,970
22	6,190	6,800	7,275	7,550	9,110	10,200	28	11,560	12,715
24	6,505	7,150	7,650	7,935	9,580	10,725	32	12,155	13,370
END OF 48D186									
26	6,915	7,600	8,130	8,435	10,185	11,400	34	12,920	14,210
28	7,145	7,850	8,400	8,715	10,520	11,775	36	13,345	14,680
30	7,510	8,250	8,830	9,160	11,055	12,375	40	14,025	15,430
32	7,780	8,550	9,150	9,490	11,455	12,825	42	14,535	15,990
34	8,010	8,800	9,415	9,770	11,790	13,200	44	14,960	16,455

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
23.1-34	47D888	TT	8	16	6,400	DW20B	24.1	72.3	32.9	211	52	45	875

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12 (Duals)	4,290	4,715	5,045	5,235	6,320	7,075	16	8,015	8,815
14 (Duals)	4,675	5,140	5,500	5,705	6,890	7,710	18	8,740	9,610
16	5,825	6,400	6,850	7,105	8,575	9,600	20	10,880	11,970

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
24.5-32	48D199	TL	12	24	8,800	DW20B, DW21B, DH21, DH21B, DH21H, DH21HB	25.8	71.8	32.7	213	53	45	875

See Next Page for the Load & Inflation Table




48D199 LOAD & INFLATION TABLE

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12 (Duals)	4,675	5,140	5,500	5,705	6,890	7,710	16	8,740	9,610
14 (Duals)	5,125	5,630	6,025	6,250	7,545	8,445	18	9,570	10,530
16	6,190	6,800	7,275	7,550	9,110	10,200	20	11,560	12,715
18	6,735	7,400	7,920	8,215	9,915	11,100	24	12,580	13,840
20	7,145	7,850	8,400	8,715	10,520	11,775	26	13,345	14,680
22	7,510	8,250	8,830	9,160	11,055	12,375	28	14,025	15,430
24	8,010	8,800	9,415	9,770	11,790	13,200	32	14,960	16,455

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
30.5L-32	48D596	TL	16	26	11,000	DH27, DH27B, DH27H, DH27HB	30.7	72.1	33.1	215	54	--	875

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
16	7,510	8,250	8,830	9,160	11,055	12,375	20	14,025	15,430
18	8,010	8,800	9,415	9,770	11,790	13,200	24	14,960	16,455
20	8,510	9,350	10,005	10,380	12,530	14,025	26	15,895	17,485
22	9,010	9,900	10,595	10,990	13,265	14,850	28	16,830	18,515
24	9,555	10,500	11,235	11,655	14,070	15,750	32	17,850	19,635
26	10,010	11,000	11,770	12,210	14,740	16,500	34	18,700	20,570



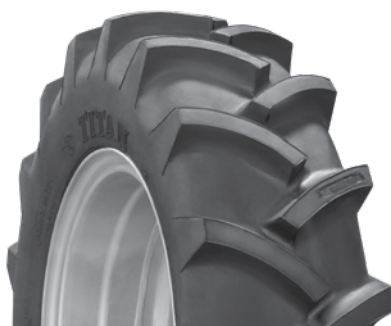

TITAN HI-POWER LUG R-1

- Single Bar design with wide overlapping lugs
- Deep tread and excellent tread wear and durability
- Designed to deliver power to the ground
- Design offers maximum cleaning and side-hill slip resistance



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
11.2-24	483404	TL	4	18	1,650	W9, W10, W10H, W10L, DW10	11.6	43.9	20.5	132	42	36	525

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
10 (Duals)	960	1,055	1,130	1,170	1,415	1,585	14	1,795	1,975
12	1,200	1,320	1,410	1,465	1,770	1,980	16	2,245	2,470
14	1,300	1,430	1,530	1,585	1,915	2,145	18	2,430	2,675
16	1,430	1,570	1,680	1,745	2,105	2,355	20	2,670	2,935
18	1,500	1,650	1,765	1,830	2,210	2,475	24	2,805	3,085

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
11.2-38	483408	TL	4	18	2,090	W10	11.5	58.1	27.5	176	42	41	700
11.2-38	473408	TT	4	18	2,090	W10	11.5	58.1	27.5	176	42	41	700
11.2-38	483608	TL	6	26	2,540	W10	11.4	57.7	27.4	175	42	41	700

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service			Irrigation Service
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)	Creep (Singles) (lbs)
10 (Duals)	1,185	1,300	1,390	1,445	1,740	1,950	14	2,210	2,430	3,120
12	1,500	1,650	1,765	1,830	2,210	2,475	16	2,805	3,085	3,480
14	1,600	1,760	1,885	1,955	2,360	2,640	18	2,990	3,290	3,710
16	1,755	1,930	2,065	2,140	2,585	2,895	20	3,280	3,610	4,070
18	1,900	2,090	2,235	2,320	2,800	3,135	24	3,555	3,910	4,410

END OF 483408 & 473408													
20	2,000	2,200	2,355	2,440	2,950	3,300	26	3,740	4,115	4,640			
22	2,130	2,340	2,505	2,595	3,135	3,510	28	3,980	4,375	4,940			
24	2,250	2,470	2,645	2,740	3,310	3,705	32	4,200	4,620	5,210			
26	2,310	2,540	2,720	2,820	3,405	3,810	34	4,320	4,750	5,360			





Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
12.4-38	473418	TT	4	16	2,340	W9, W10, W10L, DW10, W11, DW11, DW11A	12.9	59.6	28.0	181	44	42	725
12.4-38	483118	TL	12	48	4,400	W9, W10, W10L, DW10, W11, DW11, DW11A	12.8	60.3	28.6	183	44	42	725

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service						
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)				
10 (Duals)	1,410	1,550	1,660	1,720	2,075	2,325	14	2,635	2,900				
12	1,800	1,980	2,120	2,200	2,655	2,970	16	3,365	3,705				
14	1,955	2,150	2,300	2,385	2,880	3,225	18	3,655	4,020				
16	2,130	2,340	2,505	2,595	3,135	3,510	20	3,980	4,375				
END OF 473418													
20	2,365	2,600	2,780	2,885	3,485	3,900	26	4,420	4,860				
24	2,650	2,910	3,115	3,230	3,900	4,365	32	4,945	5,440				
28	2,910	3,200	3,425	3,550	4,290	4,800	36	5,440	5,985				
32	3,205	3,520	3,765	3,905	4,715	5,280	42	5,985	6,580				
36	3,405	3,740	4,000	4,150	5,010	5,610	46	6,360	6,995				
40	3,605	3,960	4,235	4,395	5,305	5,940	52	6,730	7,405				
44	3,805	4,180	4,475	4,640	5,600	6,270	58	7,105	7,815				
48	4,005	4,400	4,710	4,885	5,895	6,600	62	7,480	8,230				

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
13.6-38	473628	TT	6	22	3,300	W10, W10L, DW10, W11, DW11, W12, DW12, DW12A	14.3	61.2	28.8	185	46	43	750

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12 (Duals)	1,875	2,060	2,205	2,285	2,760	3,090	16	3,500	3,850
14	2,310	2,540	2,720	2,820	3,405	3,810	18	4,320	4,750
16	2,510	2,760	2,955	3,065	3,700	4,140	20	4,690	5,160
18	2,650	2,910	3,115	3,230	3,900	4,365	24	4,945	5,440
20	2,805	3,080	3,295	3,420	4,125	4,620	26	5,235	5,760
22	3,005	3,300	3,530	3,665	4,420	4,950	28	5,610	6,170

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
14.9-24	483434	TL	4	12	2,200	W11, DW11, W12, DW12, W13, DW13, DW13L	15.4	50.4	23.2	150	47	39	600
14.9-24	473434	TT	4	12	2,200	W11, DW11, W12, DW12, W13, DW13, DW13L	15.5	49.8	22.7	148	47	39	600
14.9-24	483634	TL	6	20	3,000	W11, DW11, W12, DW12, W13, DW13, DW13L	14.6	49.5	22.9	148	47	39	600

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service			Irrigation Service			
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)	Creep (Singles) (lbs)			
12 (Duals)	1,760	1,935	2,070	2,150	2,595	2,905	16	3,290	3,620	4,640			
END OF 483434 & 473434													
14	2,185	2,400	2,570	2,665	3,215	3,600	18	4,080	4,490				
16	2,365	2,600	2,780	2,885	3,485	3,900	20	4,420	4,860				
18	2,575	2,830	3,030	3,140	3,790	4,245	24	4,810	5,290				
20	2,730	3,000	3,210	3,330	4,020	4,500	26	5,100	5,610				





Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
14.9-26	483631	TL	6	20	3,080	W12, DW12A	15.0	52.2	24.1	156	47	39	625
14.9-26	483031	TL	10	32	4,080	W12, DW12A	15.1	51.8	23.0	156	47	39	625

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service						
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)				
12 (Duals)	1,820	2,000	2,140	2,220	2,680	3,000	16	3,400	3,740				
14	2,310	2,540	2,720	2,820	3,405	3,810	18	4,320	4,750				
16	2,440	2,680	2,870	2,975	3,590	4,020	20	4,555	5,010				
18	2,650	2,910	3,115	3,230	3,900	4,365	24	4,945	5,440				
20	2,805	3,080	3,295	3,420	4,125	4,620	26	5,235	5,760				
END OF 483631													
22	3,005	3,300	3,530	3,665	4,420	4,950	28	5,610	6,170				
24	3,110	3,420	3,660	3,795	4,585	5,130	32	5,815	6,395				
26	3,310	3,640	3,895	4,040	4,880	5,460	34	6,190	6,805				
28	3,405	3,740	4,000	4,150	5,010	5,610	36	6,360	6,995				
30	3,605	3,960	4,235	4,395	5,305	5,940	40	6,730	7,405				
32	3,715	4,080	4,365	4,530	5,465	6,120	42	6,935	7,630				

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
14.9-38	473673	TT	6	32	4,300	W12, DW12A	15.7	64.7	N/A	N/A	47	43	775

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12 (Duals)	2,210	2,430	2,600	2,695	3,255	3,645	16	4,130	4,545
14	2,730	3,000	3,210	3,330	4,020	4,500	18	5,100	5,610
16	3,005	3,300	3,530	3,665	4,420	4,950	20	5,610	6,170
18	3,205	3,520	3,765	3,905	4,715	5,280	24	5,985	6,580
20	3,405	3,740	4,000	4,150	5,010	5,610	26	6,360	6,995

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
18.4-28	473658	TT	6	16	4,080	W15L, W16L, DW16A	19.3	58.3	26.5	172	50	42	725

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12 (Duals)	2,740	3,010	3,220	3,340	4,035	4,515	16	5,115	5,630
14 (Duals)	2,995	3,290	3,520	3,650	4,410	4,935	18	5,595	6,150
16	3,715	4,080	4,365	4,530	5,465	6,120	20	6,935	7,630

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
23.1-30	473882	TT	8	16	6,000	DW20B	23.8	66.5	N/A	N/A	52	44	800

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12 (Duals)	4,070	4,470	4,785	4,960	5,990	6,705	16	7,600	8,360
14 (Duals)	4,425	4,860	5,200	5,395	6,510	7,290	18	8,260	9,090
16	5,460	6,000	6,420	6,660	8,040	9,000	20	10,200	11,220



TITAN LIFT RIGGER II R-1

- Combines thicker, self-cleaning lugs in a directional pattern with a low aspect ratio
- Greater lateral stability and flotation than conventional aerial lift tires



Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
400/70-20	43C34L	TL	150A8/B	61	7,400	W12, W13, W14L	17.2	42.6	19.6	127	32	--	500
Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)								
32	4,540	4,860	5,040	6,085	6,810								
35	4,800	5,135	5,330	6,430	7,200								
38	5,080	5,435	5,640	6,805	7,620								
44	5,680	6,080	6,305	7,610	8,520								
49	6,150	6,580	6,825	8,240	9,225								
55	6,800	7,275	7,550	9,110	10,200								
58	7,150	7,650	7,935	9,580	10,725								
61	7,400	7,920	8,215	9,915	11,100								



TITAN FARM TRACTOR R-1

- Great size for antique and older tractors
- The open 45-degree lug provides self-cleaning and traction benefits



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
11.2-34	470402	TT	4	18	1,980	W10	11.6	53.4	25.1	164	42	40	650
Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service						
8	1,120	1,230	1,315	1,365	1,650	1,845	Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)				
10	1,265	1,390	1,485	1,545	1,865	2,085	10	2,090	2,300				
12	1,385	1,520	1,625	1,685	2,035	2,280	14	2,365	2,600				
14	1,555	1,710	1,830	1,900	2,290	2,565	16	2,585	2,840				
16	1,655	1,820	1,945	2,020	2,440	2,730	18	2,905	3,200				
18	1,800	1,980	2,120	2,200	2,655	2,970	20	3,095	3,405				
							24	3,365	3,705				



FARM TRACTOR

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
11.2-36	470406	TT	4	18	2,040	W9	11.2	55.4	26.1	170	44	41	675

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
8	1,120	1,230	1,315	1,365	1,650	1,845	10	2,090	2,300
10	1,300	1,430	1,530	1,585	1,915	2,145	14	2,430	2,675
12	1,430	1,570	1,680	1,745	2,105	2,355	16	2,670	2,935
14	1,600	1,760	1,885	1,955	2,360	2,640	18	2,990	3,290
16	1,700	1,870	2,000	2,075	2,505	2,805	20	3,180	3,495
18	1,855	2,040	2,185	2,265	2,735	3,060	24	3,470	3,815

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
12.4-36	470616	TT	6	24	2,830	W9, W10, W10L, DW10, W11, DW11	12.6	57.1	26.4	171	44	41	700

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
14	1,900	2,090	2,235	2,320	2,800	3,135	18	3,555	3,910
16	2,065	2,270	2,430	2,520	3,040	3,405	20	3,860	4,245
18	2,185	2,400	2,570	2,665	3,215	3,600	24	4,080	4,490
20	2,310	2,540	2,720	2,820	3,405	3,810	26	4,320	4,750
22	2,440	2,680	2,870	2,975	3,590	4,020	28	4,555	5,010
24	2,575	2,830	3,030	3,140	3,790	4,245	32	4,810	5,290

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
13.9-36	470693	TT	6	20	3,000	W12	14.2	58.7	27.4	178	44	42	725

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
10	1,855	2,040	2,185	2,265	2,735	3,060	14	3,470	3,815
12	2,065	2,270	2,430	2,520	3,040	3,405	16	3,860	4,245
14	2,250	2,470	2,645	2,740	3,310	3,705	18	4,200	4,620
16	2,440	2,680	2,870	2,975	3,590	4,020	20	4,555	5,010
18	2,575	2,830	3,030	3,140	3,790	4,245	24	4,810	5,290
20	2,730	3,000	3,210	3,330	4,020	4,500	26	5,100	5,610





TITAN TT415 R-1

- Combine tire features increased contact area for increased traction
- Turf and soil friendly tread pattern



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
23.5L/55-26	4151C7	TL	12	30	6,150	DW20B	23.6	53.1	22.4	156	49	--	--
				40	11,500		21.9	54.0	23.9	157			

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
10	2,910	3,200	3,425	3,550	4,290	4,800	14	5,440	5,985
12	3,310	3,640	3,895	4,040	4,880	5,460	16	6,190	6,805
14	3,605	3,960	4,235	4,395	5,305	5,940	18	6,730	7,405
16	3,915	4,300	4,600	4,775	5,760	6,450	20	7,310	8,040
20	4,495	4,940	5,285	5,485	6,620	7,410	26	8,400	9,240
22	4,730	5,200	5,565	5,770	6,970	7,800	28	8,840	9,725
26	5,170	5,680	6,080	6,305	7,610	8,520	34	9,655	10,620
30	5,595	6,150	6,580	6,825	8,240	9,225	40	10,455	11,500



TITAN WHO BIG SHOW R-1

- Specifically designed for tractor rides
- Featuring a solid rib down the center known as Comfort Ride Center Rib (CRCR) Technology
- Smooth ride and improved lug wear for those long days on the road




Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
12.4-38	104618	TT	6	24	2,910	W9, W10, W10L, DW10, W11, DW11, DW11A	12.9	60.0	28.5	182	40	42	725

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
10 (Duals)	1,410	1,550	1,660	1,720	2,075	2,325	14	2,635	2,900
12	1,800	1,980	2,120	2,200	2,655	2,970	16	3,365	3,705
14	1,955	2,150	2,300	2,385	2,880	3,225	18	3,655	4,020
16	2,130	2,340	2,505	2,595	3,135	3,510	20	3,980	4,375
18	2,250	2,470	2,645	2,740	3,310	3,705	24	4,200	4,620
20	2,365	2,600	2,780	2,885	3,485	3,900	26	4,420	4,860
22	2,510	2,760	2,955	3,065	3,700	4,140	28	4,690	5,160
24	2,650	2,910	3,115	3,230	3,900	4,365	32	4,945	5,440



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
13.6-38	104628	TT	6	22	3,300	W10, W10L, DW10, W11, DW11, W12, DW12, DW12A	14.0	61.4	29.2	187	42	43	750

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
10 (Duals)	1,675	1,840	1,970	2,040	2,465	2,760	14	3,130	3,440
12	2,130	2,340	2,505	2,595	3,135	3,510	16	3,980	4,375
14	2,310	2,540	2,720	2,820	3,405	3,810	18	4,320	4,750
16	2,510	2,760	2,955	3,065	3,700	4,140	20	4,690	5,160
18	2,650	2,910	3,115	3,230	3,900	4,365	24	4,945	5,440
20	2,805	3,080	3,295	3,420	4,125	4,620	26	5,235	5,760
22	3,005	3,300	3,530	3,665	4,420	4,950	28	5,610	6,170

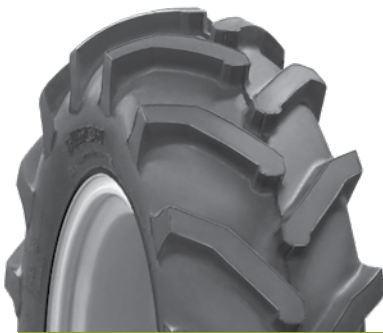

TITAN TRU POWER R-1

- Ultimate deep-traction tire with a large contact area to provide the best traction
- A great performer on wet or dry surfaces
- Features a specially designed rim guard to keep debris from the bead seat area




Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
5-12	4233F5	TL	4	34	495	4JA	5.0	20.8	9.6	62	20	--	260

Inflation Pressure (psi)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
12	240	265	285	345	370
18	305	340	365	440	475
24	355	395	425	515	555
28	395	440	470	570	615
30	410	455	485	590	635
32	420	465	500	605	650
34	445	495	530	645	695

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
6-12	4233C3	TL	4	28	600	5JA	6.1	22.6	10.6	68	20	--	280

Inflation Pressure (psi)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
12	330	365	390	475	510
18	410	455	485	590	635
24	495	550	590	715	770
28	540	600	640	780	840



Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
180/85D12	423C82	TL	77A8/B	20	910	5JA	6.9	24.1	10.8	71	23	--	290

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
						Inflation Pressure (psi)	6 mph (lbs)
9	535	600	635	705	845	15	910
12	615	690	730	810	970	17	1,045
15	715	800	850	945	1,130	20	1,215
17	805	900	960	1,065	1,270	23	1,370
20	910	1,020	1,085	1,200	1,440	26	1,545

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
320/85D16	423B83	TL	104A8/B	15	1,980	W10L, 10LB	12.6	37.6	16.7	110	32	--	450

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
						Inflation Pressure (psi)	6 mph (lbs)
9	1,520	1,700	1,810	2,005	2,400	15	2,585
12	1,760	1,970	2,095	2,325	2,780	17	2,990
15	1,980	2,220	2,355	2,615	3,130	20	3,365





FUEL ECONOMY



INCREASED TRACTION



IMPROVED PROFITABILITY



COST EFFECTIVE



IMPROVED TREAD WEAR


TITAN AGRAEDGE R-1W

Key Benefits

- New high-performing, cost-competitive Titan-branded R-1W line developed with a modern design
- Features improved compounding, the latest engineered materials and state of the art construction techniques
- The modern lug angle provides optimum self-cleaning and traction
- New construction in the sidewall and lug angle provides excellent roading capability
- Optimized tire engineering for greater deflection and improved footprint resulting in less soil compaction
- Row crop through flotation sizes forthcoming
- Dependable quality



Application(s)






FUEL ECONOMY



INCREASED TRACTION



IMPROVED PROFITABILITY



COST EFFECTIVE



IMPROVED TREAD WEAR

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32" in)	RCI	SRI
320/85R24	4AE914	TL	140D	64	5,520	W9, W10, W10H, DW10, W11, DW11	12.4	46.0	21.0	140	51	37	550
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service				
23	3,005	3,300	3,465	3,615	3,795	3,910	4,420	4,950	Inflation Pressure (psi)	6 mph (lbs)			
29	3,310	3,640	3,820	3,985	4,185	4,315	4,880	5,460	29	5,610			
35	3,515	3,860	4,055	4,225	4,440	4,575	5,170	5,790	36	6,190			
41	3,805	4,180	4,390	4,575	4,805	4,955	5,600	6,270	44	6,560			
46	4,130	4,540	4,765	4,970	5,220	5,380	6,085	6,810	51	7,105			
52	4,370	4,800	5,040	5,255	5,520	5,690	6,430	7,200	58	7,720			
58	4,625	5,080	5,335	5,565	5,840	6,020	6,805	7,620	64	8,160			
64	5,025	5,520	5,795	6,045	6,350	6,540	7,395	8,280	70	8,635			
									75	9,385			

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32" in)	RCI	SRI
340/85R24	4AE322	TL	128D	29	3,960	W11, W12	13.8	46.5	21.0	140	53	--	575
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service				
6 (Duals)	1,320	1,450	1,525	1,590	1,665	1,720	1,945	2,175	Inflation Pressure (psi)	6 mph (lbs)			
9	1,800	1,980	2,080	2,170	2,275	2,345	2,655	2,970	12	2,465			
12	2,065	2,270	2,385	2,485	2,610	2,690	3,040	3,405	15	3,365			
15	2,365	2,600	2,730	2,845	2,990	3,080	3,485	3,900	17	3,860			
17	2,730	3,000	3,150	3,285	3,450	3,555	4,020	4,500	20	4,420			
23	3,310	3,640	3,820	3,985	4,185	4,315	4,880	5,460	23	5,100			
29	3,605	3,960	4,160	4,335	4,555	4,695	5,305	5,940	29	6,190			
									36	6,730			

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32" in)	RCI	SRI
340/85R28	4AE2PE	TL	127D	23	3,860	W10, W10H, W11, DW11, W12, DW12	14.1	50.4	22.8	152	53	39	625
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service				
6 (Duals)	1,410	1,550	1,630	1,695	1,780	1,835	2,075	2,325	Inflation Pressure (psi)	6 mph (lbs)			
9	1,900	2,090	2,195	2,290	2,405	2,475	2,800	3,135	12	2,635			
12	2,250	2,470	2,595	2,705	2,840	2,925	3,310	3,705	15	3,555			
15	2,575	2,830	2,970	3,100	3,255	3,355	3,790	4,245	17	4,200			
17	2,910	3,200	3,360	3,505	3,680	3,790	4,290	4,800	20	4,810			
20	3,205	3,520	3,695	3,855	4,050	4,170	4,715	5,280	23	5,440			
23	3,515	3,860	4,055	4,225	4,440	4,575	5,170	5,790	26	5,985			
									29	6,560			

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32" in)	RCI	SRI
380/80R38	4AE4M3	TL	142D	35	5,840	W11, W12, DW12A, W13	14.8	62.6	27.9	188	54	43	750

See Next Page for the Load & Inflation Table



FUEL ECONOMY



INCREASED TRACTION



IMPROVED PROFITABILITY



COST EFFECTIVE



IMPROVED TREAD WEAR

4AE4M3 LOAD & INFLATION TABLE

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	1,820	2,000	2,100	2,190	2,300	2,370	2,680	3,000	12	3,400
9	2,510	2,760	2,900	3,020	3,175	3,270	3,700	4,140	15	4,690
12	2,910	3,200	3,360	3,505	3,680	3,790	4,290	4,800	17	5,440
17	3,805	4,180	4,390	4,575	4,805	4,955	5,600	6,270	23	7,105
23	4,625	5,080	5,335	5,565	5,840	6,020	6,805	7,620	29	8,635
29	5,025	5,520	5,795	6,045	6,350	6,540	7,395	8,280	36	9,385
35	5,315	5,840	6,130	6,395	6,715	6,920	7,825	8,760	44	9,930

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
380/85R24	4AE234	TL	131D	23	4,300	W11, W12, W13	14.9	49.2	22.0	148	54	--	600
380/85R24	4AE634	TL	143D	46	6,000	W11, W12, W13	15.0	49.1	22.4	149	54	--	600

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
									Inflation Pressure (psi)	6 mph (lbs)	
6 (Duals)	1,545	1,700	1,785	1,860	1,955	2,015	2,280	2,550	12	2,890	
9	2,130	2,340	2,455	2,560	2,690	2,775	3,135	3,510	15	3,980	
12	2,510	2,760	2,900	3,020	3,175	3,270	3,700	4,140	17	4,690	
15	2,805	3,080	3,235	3,375	3,540	3,650	4,125	4,620	20	5,235	
17	3,205	3,520	3,695	3,855	4,050	4,170	4,715	5,280	23	5,985	
20	3,515	3,860	4,055	4,225	4,440	4,575	5,170	5,790	26	6,560	
23	3,915	4,300	4,515	4,710	4,945	5,095	5,760	6,450	29	7,310	
END OF 4AE234											
29	4,260	4,680	4,915	5,125	5,380	5,545	6,270	7,020	36	7,955	
35	4,625	5,080	5,335	5,565	5,840	6,020	6,805	7,620	44	8,635	
41	5,025	5,520	5,795	6,045	6,350	6,540	7,395	8,280	51	9,385	
46	5,460	6,000	6,300	6,570	6,900	7,110	8,040	9,000	58	10,200	

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
380/85R28	4AE238	TL	133D	23	4,540	W11, W12, W13	14.8	53.2	23.7	160	54	40	650

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	1,675	1,840	1,930	2,015	2,115	2,180	2,465	2,760	12	3,130
9	2,310	2,540	2,665	2,780	2,920	3,010	3,405	3,810	15	4,320
12	2,650	2,910	3,055	3,185	3,345	3,450	3,900	4,365	17	4,945
15	3,005	3,300	3,465	3,615	3,795	3,910	4,420	4,950	20	5,610
17	3,405	3,740	3,925	4,095	4,300	4,430	5,010	5,610	23	6,360
20	3,805	4,180	4,390	4,575	4,805	4,955	5,600	6,270	26	7,105
23	4,130	4,540	4,765	4,970	5,220	5,380	6,085	6,810	29	7,720

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
380/85R30	4AE230	TL	135D	23	4,800	W11, W12, W13, DW13A	15.1	55.4	24.6	166	54	41	675

See Next Page for the Load & Inflation Table



FUEL ECONOMY



INCREASED TRACTION



IMPROVED PROFITABILITY



COST EFFECTIVE



IMPROVED TREAD WEAR



4AE230 LOAD & INFLATION TABLE

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	1,720	1,890	1,985	2,070	2,175	2,240	2,535	2,835	12	3,215
9	2,365	2,600	2,730	2,845	2,990	3,080	3,485	3,900	15	4,420
12	2,730	3,000	3,150	3,285	3,450	3,555	4,020	4,500	17	5,100
15	3,110	3,420	3,590	3,745	3,935	4,055	4,585	5,130	20	5,815
17	3,515	3,860	4,055	4,225	4,440	4,575	5,170	5,790	23	6,560
20	3,915	4,300	4,515	4,710	4,945	5,095	5,760	6,450	26	7,310
23	4,370	4,800	5,040	5,255	5,520	5,690	6,430	7,200	29	8,160

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
380/85R34	4AE2HP	TL	137D	23	5,080	W11, W12, W13	15.5	59.0	25.6	175	54	42	725

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	1,820	2,000	2,100	2,190	2,300	2,370	2,680	3,000	12	3,400
9	2,510	2,760	2,900	3,020	3,175	3,270	3,700	4,140	15	4,690
12	2,910	3,200	3,360	3,505	3,680	3,790	4,290	4,800	17	5,440
15	3,310	3,640	3,820	3,985	4,185	4,315	4,880	5,460	20	6,190
17	3,715	4,080	4,285	4,470	4,690	4,835	5,465	6,120	23	6,935
20	4,130	4,540	4,765	4,970	5,220	5,380	6,085	6,810	26	7,720
23	4,625	5,080	5,335	5,565	5,840	6,020	6,805	7,620	29	8,635

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
380/90R46	4AE432	TL	149D	35	7,150	W12A, W12B, W13A, W13B, DW13A, DW13B	15.3	73.2	33.9	223	56	46	925

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	2,265	2,490	2,615	2,725	2,865	2,950	3,335	3,735	12	4,235
9	3,005	3,300	3,465	3,615	3,795	3,910	4,420	4,950	15	5,610
12	3,515	3,860	4,055	4,225	4,440	4,575	5,170	5,790	17	6,560
17	4,625	5,080	5,335	5,565	5,840	6,020	6,805	7,620	23	8,635
23	5,595	6,150	6,460	6,735	7,070	7,290	8,240	9,225	29	10,455
29	6,190	6,800	7,140	7,445	7,820	8,060	9,110	10,200	36	11,560
35	6,505	7,150	7,510	7,830	8,225	8,475	9,580	10,725	44	12,155

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
420/85R26	4AE246	TL	138D	23	5,200	W12, DW12, W13, W14L, DW14A, W15L, DW15A	16.6	53.6	24.0	161	57	40	650

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	1,875	2,060	2,165	2,255	2,370	2,440	2,760	3,090	12	3,500
9	2,575	2,830	2,970	3,100	3,255	3,355	3,790	4,245	15	4,810
12	3,005	3,300	3,465	3,615	3,795	3,910	4,420	4,950	17	5,610
15	3,405	3,740	3,925	4,095	4,300	4,430	5,010	5,610	20	6,360
17	3,915	4,300	4,515	4,710	4,945	5,095	5,760	6,450	23	7,310
20	4,260	4,680	4,915	5,125	5,380	5,545	6,270	7,020	26	7,955
23	4,730	5,200	5,460	5,695	5,980	6,160	6,970	7,800	29	8,840



FUEL ECONOMY



INCREASED TRACTION



IMPROVED PROFITABILITY



COST EFFECTIVE



IMPROVED TREAD WEAR

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
420/85R28	4AE248	TL	139D	23	5,360	W12, W13, W14L, W15L	17.4	55.3	25.2	168	57	41	675

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	1,980	2,175	2,285	2,380	2,500	2,575	2,915	3,265	12	3,700
9	2,650	2,910	3,055	3,185	3,345	3,450	3,900	4,365	15	4,945
12	3,110	3,420	3,590	3,745	3,935	4,055	4,585	5,130	17	5,815
15	3,515	3,860	4,055	4,225	4,440	4,575	5,170	5,790	20	6,560
17	4,005	4,400	4,620	4,820	5,060	5,215	5,895	6,600	23	7,480
20	4,495	4,940	5,185	5,410	5,680	5,855	6,620	7,410	26	8,400
23	4,880	5,360	5,630	5,870	6,165	6,350	7,180	8,040	29	9,110

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
420/85R34	4AE4M4	TL	147D	35	6,800	W13, W14L, DW14A, W15A, W15L, DW15A	17.1	61.6	27.8	186	57	43	750

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	2,150	2,360	2,480	2,585	2,715	2,795	3,160	3,540	12	4,010
9	2,910	3,200	3,360	3,505	3,680	3,790	4,290	4,800	15	5,440
12	3,405	3,740	3,925	4,095	4,300	4,430	5,010	5,610	17	6,360
17	4,370	4,800	5,040	5,255	5,520	5,690	6,430	7,200	23	8,160
23	5,315	5,840	6,130	6,395	6,715	6,920	7,825	8,760	29	9,930
29	5,825	6,400	6,720	7,010	7,360	7,585	8,575	9,600	36	10,880
35	6,190	6,800	7,140	7,445	7,820	8,060	9,110	10,200	44	11,560

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
420/85R38	4AE268	TL	144D	23	6,150	W12, DW12A, W14L, DW14A, W15A, W15L, DW15A	17.2	66.2	29.9	200	57	44	800

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	2,265	2,490	2,615	2,725	2,865	2,950	3,335	3,735	12	4,235
9	3,110	3,420	3,590	3,745	3,935	4,055	4,585	5,130	15	5,815
12	3,605	3,960	4,160	4,335	4,555	4,695	5,305	5,940	17	6,730
15	4,130	4,540	4,765	4,970	5,220	5,380	6,085	6,810	20	7,720
17	4,625	5,080	5,335	5,565	5,840	6,020	6,805	7,620	23	8,635
20	5,170	5,680	5,965	6,220	6,530	6,730	7,610	8,520	26	9,655
23	5,595	6,150	6,460	6,735	7,070	7,290	8,240	9,225	29	10,455

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
420/90R30	4AE279	TL	142D	23	5,840	W12, W13, DW13, DW13A, W14L, DW14A, W15L, DW15A	17.4	59.3	26.7	179	59	42	725

See Next Page for the Load & Inflation Table



FUEL ECONOMY



INCREASED TRACTION



IMPROVED PROFITABILITY



COST EFFECTIVE



IMPROVED TREAD WEAR



4AE279 LOAD & INFLATION TABLE

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	2,150	2,360	2,480	2,585	2,715	2,795	3,160	3,540	12	4,010
9	2,910	3,200	3,360	3,505	3,680	3,790	4,290	4,800	15	5,440
12	3,405	3,740	3,925	4,095	4,300	4,430	5,010	5,610	17	6,360
15	3,805	4,180	4,390	4,575	4,805	4,955	5,600	6,270	20	7,105
17	4,370	4,800	5,040	5,255	5,520	5,690	6,430	7,200	23	8,160
20	4,880	5,360	5,630	5,870	6,165	6,350	7,180	8,040	26	9,110
23	5,315	5,840	6,130	6,395	6,715	6,920	7,825	8,760	29	9,930

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
460/85R30	4AE250	TL	145D	23	6,400	W14L, DW14A, W15L, DW15A, W16A, W16L, DW16A	18.6	60.3	27.2	182	59	--	725

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	2,465	2,710	2,845	2,965	3,115	3,210	3,630	4,065	12	4,605
9	3,310	3,640	3,820	3,985	4,185	4,315	4,880	5,460	15	6,190
12	3,915	4,300	4,515	4,710	4,945	5,095	5,760	6,450	17	7,310
15	4,495	4,940	5,185	5,410	5,680	5,855	6,620	7,410	20	8,400
17	5,025	5,520	5,795	6,045	6,350	6,540	7,395	8,280	23	9,385
20	5,595	6,150	6,460	6,735	7,070	7,290	8,240	9,225	26	10,455
23	6,190	6,800	7,140	7,445	7,820	8,060	9,110	10,200	29	11,560

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
460/85R34	4AE254	TL	147D	23	6,800	DW14A, W15A, W15L, DW15A, W16A, W16L, DW16A	18.3	64.7	21.6	195	59	44	775

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	2,330	2,560	2,690	2,805	2,945	3,035	3,430	3,840	12	4,350
9	3,205	3,520	3,695	3,855	4,050	4,170	4,715	5,280	15	5,985
12	3,715	4,080	4,285	4,470	4,690	4,835	5,465	6,120	17	6,935
15	4,260	4,680	4,915	5,125	5,380	5,545	6,270	7,020	20	7,955
17	4,730	5,200	5,460	5,695	5,980	6,160	6,970	7,800	23	8,840
20	5,315	5,840	6,130	6,395	6,715	6,920	7,825	8,760	26	9,930
23	5,825	6,400	6,720	7,010	7,360	7,585	8,575	9,600	29	10,880

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
460/85R38	4AE377	TL	152D	29	7,850	W14L, DW14A, W15A, W15L, DW15A, W16A, W16L, DW16A, DD16	17.5	68.4	30.4	205	59	45	825

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	2,560	2,815	2,955	3,080	3,235	3,335	3,770	4,225	12	4,785
9	3,515	3,860	4,055	4,225	4,440	4,575	5,170	5,790	15	6,560
12	4,130	4,540	4,765	4,970	5,220	5,380	6,085	6,810	17	7,720
15	4,730	5,200	5,460	5,695	5,980	6,160	6,970	7,800	20	8,840
17	5,315	5,840	6,130	6,395	6,715	6,920	7,825	8,760	23	9,930
23	6,505	7,150	7,510	7,830	8,225	8,475	9,580	10,725	29	12,155
29	7,145	7,850	8,245	8,595	9,030	9,300	10,520	11,775	36	13,345



FUEL ECONOMY



INCREASED TRACTION



IMPROVED PROFITABILITY



COST EFFECTIVE



IMPROVED TREAD WEAR

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim				Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
480/70R30	4AE640	TL	152D	46	7,850	W14L, W15L, DW15A, W16A, W16L				18.2	58.1	26.7	176	56	42	700

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	2,085	2,290	2,405	2,510	2,635	2,715	3,070	3,435	12	3,895
12	3,310	3,640	3,820	3,985	4,185	4,315	4,880	5,460	17	6,190
17	4,260	4,680	4,915	5,125	5,380	5,545	6,270	7,020	23	7,955
23	5,170	5,680	5,965	6,220	6,530	6,730	7,610	8,520	29	9,655
29	5,825	6,400	6,720	7,010	7,360	7,585	8,575	9,600	36	10,880
35	6,190	6,800	7,140	7,445	7,820	8,060	9,110	10,200	44	11,560
41	6,735	7,400	7,770	8,105	8,510	8,770	9,915	11,100	51	12,580
46	7,145	7,850	8,245	8,595	9,030	9,300	10,520	11,775	58	13,345

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim				Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
480/80R42	4AE242	TL	151D	23	7,600	W14L, DW14L, W15L, DW15L, W16A, W16L, DW16A, DW16L, DD16				19.2	72.2	31.9	216	59	46	875
480/80R42	4AE842	TL	166D	58	11,700	W14L, DW14L, W15L, DW15L, W16A, W16L, DW16A, DW16L, DD16				18.9	72.5	32.9	219	59	46	875

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	2,740	3,010	3,160	3,295	3,460	3,565	4,035	4,515	12	5,115
9	3,715	4,080	4,285	4,470	4,690	4,835	5,465	6,120	15	6,935
12	4,370	4,800	5,040	5,255	5,520	5,690	6,430	7,200	17	8,160
15	5,025	5,520	5,795	6,045	6,350	6,540	7,395	8,280	20	9,385
17	5,595	6,150	6,460	6,735	7,070	7,290	8,240	9,225	23	10,455
20	6,325	6,950	7,300	7,610	7,990	8,235	9,315	10,425	26	11,815
23	6,915	7,600	7,980	8,320	8,740	9,005	10,185	11,400	29	12,920
END OF 4AE242										
29	7,510	8,250	8,665	9,035	9,490	9,775	11,055	12,375	36	14,025
35	8,010	8,800	9,240	9,635	10,120	10,430	11,790	13,200	44	14,960
41	8,780	9,650	10,135	10,565	11,100	11,435	12,930	14,475	51	16,405
46	9,555	10,500	11,025	11,500	12,075	12,445	14,070	15,750	58	17,850
49	9,735	10,700	11,235	11,715	12,305	12,680	14,340	16,050	61	18,190
52	10,010	11,000	11,550	12,045	12,650	13,035	14,740	16,500	64	18,700
58	10,645	11,700	12,285	12,810	13,455	13,865	15,680	17,550	70	19,890

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim				Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
480/80R46	4AE447	TL	158D	35	9,350	W14L, DW14L, W15L, DW15L, W16A, W16L, DW16A, DW16L, DD16				18.4	76.8	34.5	232	59	47	925

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	2,915	3,205	3,365	3,510	3,685	3,800	4,295	4,810	12	5,450
9	3,915	4,300	4,515	4,710	4,945	5,095	5,760	6,450	15	7,310
12	4,625	5,080	5,335	5,565	5,840	6,020	6,805	7,620	17	8,635
17	5,825	6,400	6,720	7,010	7,360	7,585	8,575	9,600	23	10,880
23	7,145	7,850	8,245	8,595	9,030	9,300	10,520	11,775	29	13,345
29	7,780	8,550	8,980	9,360	9,835	10,130	11,455	12,825	36	14,535
35	8,510	9,350	9,820	10,240	10,755	11,080	12,530	14,025	44	15,895



FUEL ECONOMY



INCREASED TRACTION



IMPROVED PROFITABILITY



COST EFFECTIVE



IMPROVED TREAD WEAR

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim			Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
480/80R50	4AE451	TL	159D	35	9,650	W14L, DW14L, W15A, W15B, W15L, DW15A, DW15B, DW15L, W16L, DW16A, DW16B, DW16L			18.3	80.5	36.0	242	59	48	975
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service						
6 (Duals)	2,995	3,290	3,455	3,605	3,785	3,900	4,410	4,935	Inflation Pressure (psi)	6 mph (lbs)					
9	4,130	4,540	4,765	4,970	5,220	5,380	6,085	6,810	12	5,595					
12	4,730	5,200	5,460	5,695	5,980	6,160	6,970	7,800	15	7,720					
17	6,190	6,800	7,140	7,445	7,820	8,060	9,110	10,200	17	8,840					
23	7,510	8,250	8,665	9,035	9,490	9,775	11,055	12,375	23	11,560					
29	8,280	9,100	9,555	9,965	10,465	10,785	12,195	13,650	29	14,025					
35	8,780	9,650	10,135	10,565	11,100	11,435	12,930	14,475	36	15,470					
									44	16,405					

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim			Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
520/85R38	4AE189	TL	148D	17	6,950	W16A, DW16A, DD16, W18A, DW18A, DD18			20.9	72.6	32.1	218	62	46	875
520/85R38	4AE389	TL	158D	29	9,350	W16A, DW16A, DD16, W18A, DW18A, DD18			21.3	72.3	32.1	217	62	46	875
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service						
6 (Duals)	3,090	3,395	3,565	3,720	3,905	4,025	4,550	5,095	Inflation Pressure (psi)	6 mph (lbs)					
9	4,260	4,680	4,915	5,125	5,380	5,545	6,270	7,020	12	5,770					
12	5,025	5,520	5,795	6,045	6,350	6,540	7,395	8,280	15	7,955					
15	5,595	6,150	6,460	6,735	7,070	7,290	8,240	9,225	17	9,385					
17	6,325	6,950	7,300	7,610	7,990	8,235	9,315	10,425	20	10,455					
END OF 4AE189															
20	7,145	7,850	8,245	8,595	9,030	9,300	10,520	11,775	23	11,815					
23	7,780	8,550	8,980	9,360	9,835	10,130	11,455	12,825	26	13,345					
26	8,280	9,100	9,555	9,965	10,465	10,785	12,195	13,650	29	14,535					
29	8,510	9,350	9,820	10,240	10,755	11,080	12,530	14,025	33	15,470					
									36	15,895					

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim			Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
520/85R42	4AE252	TL	157D	23	9,100	W15L, W16A, W16L, DW16A, DW16L, DD16, DD16L, W18A, W18L, DW18A, DW18B, DD18, DD18L			20.8	75.8	33.5	227	62	47	925
Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service						
6 (Duals)	3,265	3,590	3,770	3,930	4,130	4,255	4,810	5,385	Inflation Pressure (psi)	6 mph (lbs)					
9	4,495	4,940	5,185	5,410	5,680	5,855	6,620	7,410	12	6,105					
12	5,170	5,680	5,965	6,220	6,530	6,730	7,610	8,520	15	8,400					
15	6,005	6,600	6,930	7,225	7,590	7,820	8,845	9,900	17	9,655					
17	6,735	7,400	7,770	8,105	8,510	8,770	9,915	11,100	20	11,220					
20	7,510	8,250	8,665	9,035	9,490	9,775	11,055	12,375	23	12,580					
23	8,280	9,100	9,555	9,965	10,465	10,785	12,195	13,650	26	14,025					
									29	15,470					

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim			Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
520/85R46	4AE271	TL	158D	23	9,350	W15L, W16A, W16L, DW16L, DD16, DD16L, W18A, W18L, DW18B, DD18L			20.4	81.3	36.6	245	62	48	975

See Next Page for the Load & Inflation Table



FUEL ECONOMY



INCREASED TRACTION



IMPROVED PROFITABILITY



COST EFFECTIVE



IMPROVED TREAD WEAR

4AE271 LOAD & INFLATION TABLE

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
6 (Duals)	3,445	3,785	3,975	4,145	4,355	4,485	5,070	5,680	12	6,435
9	4,625	5,080	5,335	5,565	5,840	6,020	6,805	7,620	15	8,635
12	5,460	6,000	6,300	6,570	6,900	7,110	8,040	9,000	17	10,200
15	6,190	6,800	7,140	7,445	7,820	8,060	9,110	10,200	20	11,560
17	6,915	7,600	7,980	8,320	8,740	9,005	10,185	11,400	23	12,920
20	7,780	8,550	8,980	9,360	9,835	10,130	11,455	12,825	26	14,535
23	8,510	9,350	9,820	10,240	10,755	11,080	12,530	14,025	29	15,895

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
600/70R30	4AE2M6	TL	152D	23	7,850	W18L, DW18A, DW18L, DW20B	23.1	62.7	28.0	189	60	43	750

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
9	3,520	3,870	4,065	4,240	4,450	4,585	5,185	5,805	15	6,580
12	4,730	5,200	5,460	5,695	5,980	6,160	6,970	7,800	17	8,840
15	5,315	5,840	6,130	6,395	6,715	6,920	7,825	8,760	20	9,930
17	6,005	6,600	6,930	7,225	7,590	7,820	8,845	9,900	23	11,220
20	6,735	7,400	7,770	8,105	8,510	8,770	9,915	11,100	26	12,580
23	7,145	7,850	8,245	8,595	9,030	9,300	10,520	11,775	29	13,345

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
620/70R46	4AE281	TL	162D	23	10,500	W18L, DW18L, DW20B, MW20B	24.3	80.0	35.8	241	62	48	975

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
9	4,550	5,000	5,250	5,475	5,750	5,925	6,700	7,500	15	8,500
12	6,005	6,600	6,930	7,225	7,590	7,820	8,845	9,900	17	11,220
15	6,915	7,600	7,980	8,320	8,740	9,005	10,185	11,400	20	12,920
17	7,780	8,550	8,980	9,360	9,835	10,130	11,455	12,825	23	14,535
20	8,510	9,350	9,820	10,240	10,755	11,080	12,530	14,025	26	15,895
23	9,555	10,500	11,025	11,500	12,075	12,445	14,070	15,750	29	17,850

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
650/75R32	4AE1FU	TL	154D	17	8,250	DW20B, DW21B, DH21, DH21B, DH21HB, DW23B	25.4	69.8	30.6	209	65	45	875

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
9	4,425	4,860	5,105	5,320	5,590	5,760	6,510	7,290	15	8,260
12	5,825	6,400	6,720	7,010	7,360	7,585	8,575	9,600	17	10,880
15	6,735	7,400	7,770	8,105	8,510	8,770	9,915	11,100	20	12,580
17	7,510	8,250	8,665	9,035	9,490	9,775	11,055	12,375	23	14,025



Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32" in)	RCI	SRI
800/70R38	4AE2M8	TL	173D	23	14,300	DW25B, MW25B, DW27B, MW27B, MW28B	32.3	81.6	35.3	242	70	48	975

Inflation Pressure (psi)	43 mph (lbs)	40 mph (lbs)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
									Inflation Pressure (psi)	6 mph (lbs)
9	6,090	6,690	7,025	7,325	7,695	7,930	8,965	10,035	15	11,375
12	8,280	9,100	9,555	9,965	10,465	10,785	12,195	13,650	17	15,470
15	9,280	10,200	10,710	11,170	11,730	12,085	13,670	15,300	20	17,340
17	10,645	11,700	12,285	12,810	13,455	13,865	15,680	17,550	23	19,890
20	11,650	12,800	13,440	14,015	14,720	15,170	17,150	19,200	26	21,760
23	13,015	14,300	15,015	15,660	16,445	16,945	19,160	21,450	29	24,310



TITAN TT49V R-1W

- Developed for high clearance with the row crop market in mind
- Features a deeper tread than an R-1 tire for improved traction



Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32" in)	RCI	SRI
320/85R38	49V445	TL	138A8/B	41	5,200	W9, W10, W10A, DW10, DW10A, W11, DW11, DW11A	11.5	60.0	28.2	184	55	42	725

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
						Inflation Pressure (psi)	6 mph (lbs)
12	2,600	2,910	3,095	3,430	4,110	17	4,420
15	3,000	3,360	3,570	3,960	4,740	20	5,100
17	3,420	3,830	4,070	4,515	5,405	23	5,815
23	4,080	4,570	4,855	5,385	6,445	29	6,935
29	4,540	5,085	5,405	5,995	7,175	36	7,720
35	4,800	5,375	5,710	6,335	7,585	44	8,160
38	5,080	5,690	6,045	6,705	8,025	48	8,635
41	5,200	5,825	6,190	6,865	8,215	51	8,840






TITAN AG49M RADIAL R-1W

- Wide base and wider section width allow for higher loads
- Greater flotation, improved traction, and smoother ride



Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
710/70R38	49M769	TL	166A8/B	23	11,700	DW23B, MW23B, DW25B, MW25B	25.7	77.1	33.4	229	78	47	925
710/70R38	49M969	TL	177A8/B	46	16,100	DW23B, MW23B, DW25B, MW25B	25.5	76.6	34.8	232	78	47	925
Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service							
6 (Duals)	4,715	5,280	5,610	6,225	7,450	Inflation Pressure (psi)	6 mph (lbs)						
9	6,400	7,170	7,615	8,450	10,110	12	8,015						
12	7,400	8,290	8,805	9,770	11,690	15	10,880						
15	8,550	9,575	10,175	11,285	13,510	17	12,580						
17	9,650	10,810	11,485	12,740	15,245	20	14,535						
20	10,700	11,985	12,735	14,125	16,905	23	16,405						
23	11,700	13,105	13,925	15,445	18,485	26	18,190						
END OF 49M769													
26	12,300	13,775	14,635	16,235	19,435	29	19,890						
32	13,200	14,785	15,710	17,425	20,855	33	20,910						
35	13,600	15,230	16,185	17,950	21,490	41	22,440						
38	14,300	16,015	17,015	18,875	22,595	44	23,120						
41	15,200	17,025	18,090	20,065	24,015	48	24,310						
44	15,700	17,585	18,685	20,725	24,805	51	25,840						
46	16,100	18,030	19,160	21,250	25,440	55	26,690						
						58	27,370						





TITAN TORC-TRAC R-3

- Minimizes ground disturbance with its wide, flat footprint and deep grooves
- Performance proven as an original equipment tire



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
14.9-24	485834	TL	8	26	3,520	W11, DW11, W12, DW12, W13, DW13, DW13L	15.2	48.4	22.1	144	27	--	600

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12 (Duals)	1,760	1,935	2,070	2,150	2,595	2,905	16	3,290	3,620
14	2,185	2,400	2,570	2,665	3,215	3,600	18	4,080	4,490
16	2,365	2,600	2,780	2,885	3,485	3,900	20	4,420	4,860
18	2,575	2,830	3,030	3,140	3,790	4,245	24	4,810	5,290
20	2,730	3,000	3,210	3,330	4,020	4,500	26	5,100	5,610
22	2,910	3,200	3,425	3,550	4,290	4,800	28	5,440	5,985
24	3,005	3,300	3,530	3,665	4,420	4,950	32	5,610	6,170
26	3,205	3,520	3,765	3,905	4,715	5,280	34	5,985	6,580

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
16.9-24	485845	TL	8	24	4,080	W14L, DW14L, W15L, DW15L	17.6	51.6	22.9	151	28	--	625

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12 (Duals)	2,150	2,360	2,525	2,620	3,160	3,540	16	4,010	4,415
14	2,650	2,910	3,115	3,230	3,900	4,365	18	4,945	5,440
16	2,910	3,200	3,425	3,550	4,290	4,800	20	5,440	5,985
18	3,110	3,420	3,660	3,795	4,585	5,130	24	5,815	6,395
20	3,310	3,640	3,895	4,040	4,880	5,460	26	6,190	6,805
22	3,515	3,860	4,130	4,285	5,170	5,790	28	6,560	7,220
24	3,715	4,080	4,365	4,530	5,465	6,120	32	6,935	7,630

Tire Size	Catalog #	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
18.4-26	485156	TL	12	142A8	32	5,840	W15L, DW15A, DW16A	19.7	57.2	26.2	170	29	--	675
18.4-26	485756	TL	18	N/A	46	7,400	W15L, DW15A, DW16A	19.5	56.8	26.0	169	29	--	675

See Next Page for the Load & Inflation Table



485156 & 485756 LOAD & INFLATION TABLE									
Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12 (Duals)	2,645	2,905	3,110	3,225	3,895	4,360	16	4,940	5,430
14	3,310	3,640	3,895	4,040	4,880	5,460	18	6,190	6,805
18	3,805	4,180	4,475	4,640	5,600	6,270	24	7,105	7,815
22	4,370	4,800	5,135	5,330	6,430	7,200	28	8,160	8,975
26	4,730	5,200	5,565	5,770	6,970	7,800	34	8,840	9,725
30	5,170	5,680	6,080	6,305	7,610	8,520	40	9,655	10,620
32	5,315	5,840	6,250	6,480	7,825	8,760	42	9,930	10,920
END OF 485156									
34	5,595	6,150	6,580	6,825	8,240	9,225	44	10,455	11,500
36	5,825	6,400	6,850	7,105	8,575	9,600	46	10,880	11,970
38	6,005	6,600	7,060	7,325	8,845	9,900	50	11,220	12,340
40	6,190	6,800	7,275	7,550	9,110	10,200	52	11,560	12,715
42	6,325	6,950	7,435	7,715	9,315	10,425	54	11,815	12,995
44	6,505	7,150	7,650	7,935	9,580	10,725	58	12,155	13,370
46	6,735	7,400	7,920	8,215	9,915	11,100	60	12,580	13,840

Tire Size	Catalog #	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
23.1-26	485186	TL	12	149A8	24	7,150	DW20B	24.2	62.2	28.2	184	35	--	750

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
	3,845	4,225	4,520	4,690	5,660	6,340	16	7,185	7,900
14	4,730	5,200	5,565	5,770	6,970	7,800	18	8,840	9,725
16	5,170	5,680	6,080	6,305	7,610	8,520	20	9,655	10,620
18	5,460	6,000	6,420	6,660	8,040	9,000	24	10,200	11,220
20	5,825	6,400	6,850	7,105	8,575	9,600	26	10,880	11,970
22	6,190	6,800	7,275	7,550	9,110	10,200	28	11,560	12,715
24	6,505	7,150	7,650	7,935	9,580	10,725	32	12,155	13,370

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
33X15.50-16.5	4853X3	TL	12	60	6,600	12.00	14.2	33.0	14.8	97	23	--	--

Inflation Pressure (psi)	5 mph (lbs)	10 mph (lbs)	20 mph (lbs)	25 mph (lbs)	30 mph (lbs)
20	3,520	2,780	2,395	2,325	2,220
25	3,960	3,130	2,695	2,615	2,495
30	4,400	3,475	2,990	2,905	2,770
35	4,800	3,790	3,265	3,170	3,025
40	5,200	4,110	3,535	3,430	3,275
45	5,680	4,485	3,860	3,750	3,580
50	6,000	4,740	4,080	3,960	3,780
55	6,400	5,055	4,350	4,225	4,030
60	6,600	5,215	4,490	4,355	4,160



TITAN TORC-TRAC II RADIAL R-3

- Features radial construction for reduced rolling resistance, increased footprint area and reduces fuel consumption
- This rugged tire minimizes ground disturbance with a button tread pattern that offers good performance on vibratory rollers and combine applications





Tire Size	Catalog #	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
24.5R32	4R5299	TL	2*	159A8/B	24	9,650	DW21B, DH21, DH21B, DH21H, DH21HB	23.5	70.6	31.5	212	35	45	875
24.5R32	4R5699	TL	N/A	173A8/B	48	14,300	DW21B, DH21, DH21B, DH21H, DH21HB	23.5	70.6	31.2	210	35	45	875

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
						Inflation Pressure (psi)	6 mph (lbs)
8	5,080	5,435	5,640	6,805	7,620	14	8,635
10	5,840	6,250	6,480	7,825	8,760	16	9,930
12	6,400	6,850	7,105	8,575	9,600	17	10,880
16	7,600	8,130	8,435	10,185	11,400	22	12,920
18	8,250	8,830	9,160	11,055	12,375	24	14,025
20	8,800	9,415	9,770	11,790	13,200	26	14,960
22	9,100	9,735	10,100	12,195	13,650	28	15,470
24	9,650	10,325	10,710	12,930	14,475	30	16,405
END OF 4R5299							
26	10,200	10,915	11,320	13,670	15,300	33	17,340
30	11,000	11,770	12,210	14,740	16,500	38	18,700
34	12,000	12,840	13,320	16,080	18,000	42	20,400
38	12,800	13,695	14,210	17,150	19,200	48	21,760
42	13,600	14,550	15,095	18,225	20,400	52	23,120
48	14,300	15,300	15,875	19,160	21,450	59	24,310

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
28LR26	48G798	TL	174A8/B	54	14,800	DW25B	28.8	62.4	27.5	187	30	43	750

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service	
						Inflation Pressure (psi)	6 mph (lbs)
8	4,800	5,135	5,330	6,430	7,200	14	8,160
14	6,800	7,275	7,550	9,110	10,200	20	11,560
20	8,250	8,830	9,160	11,055	12,375	26	14,025
26	9,650	10,325	10,710	12,930	14,475	33	16,405
32	11,000	11,770	12,210	14,740	16,500	41	18,700
38	12,000	12,840	13,320	16,080	18,000	48	20,400
46	13,600	14,550	15,095	18,225	20,400	58	23,120
54	14,800	15,835	16,430	19,830	22,200	65	25,160





TORC-TRAC II RADIAL

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
30.5LR32	48G796	TL	181A8/B	52	18,200	DW27B, DH27, DH27B, DH27H, DH27HB	30.0	69.8	31.2	210	37	45	875
Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service							
						Inflation Pressure (psi)	6 mph (lbs)						
8	6,150	6,580	6,825	8,240	9,225	14	10,455						
14	8,550	9,150	9,490	11,455	12,825	20	14,535						
20	10,500	11,235	11,655	14,070	15,750	26	17,850						
26	12,000	12,840	13,320	16,080	18,000	33	20,400						
32	13,600	14,550	15,095	18,225	20,400	41	23,120						
38	15,200	16,265	16,870	20,370	22,800	48	25,840						
46	17,100	18,295	18,980	22,915	25,650	58	29,070						
52	18,200	19,475	20,200	24,390	27,300	64	30,940						




TITAN TORC-TRAC II R-3

- This rugged tire minimizes ground disturbance with a button tread pattern that offers good performance on vibratory rollers and combine applications



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
13.6-28	475624	TT	6	22	2,830	W10, W10L, DW10, W11, DW11, W12, DW12	14.4	50.4	23.1	150	24	39	625
Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service						
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)				
12	1,800	1,980	2,120	2,200	2,655	2,970	16	3,365	3,705				
14	2,000	2,200	2,355	2,440	2,950	3,300	18	3,740	4,115				
16	2,130	2,340	2,505	2,595	3,135	3,510	21	3,980	4,375				
18	2,310	2,540	2,720	2,820	3,405	3,810	23	4,320	4,750				
20	2,440	2,680	2,870	2,975	3,590	4,020	26	4,555	5,010				
22	2,575	2,830	3,030	3,140	3,790	4,245	29	4,810	5,290				





Tire Size	Catalog #	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
620/70D26	88648A	TL	N/A	141A8	16	5,680	DW20B	23.9	60.3	27.2	178	31	--	--
23.1-26	48A586	TL	16	N/A	34	8,800	DW20B	23.9	60.4	27.6	179	31	--	--


Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service							
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)					
12	4,370	4,800	5,135	5,330	6,430	7,200	16	8,160	8,975					
14	4,730	5,200	5,565	5,770	6,970	7,800	18	8,840	9,725					
16	5,170	5,680	6,080	6,305	7,610	8,520	21	9,655	10,620					
END OF 88648A														
20	5,825	6,400	6,850	7,105	8,575	9,600	26	10,880	11,970					
22	6,190	6,800	7,275	7,550	9,110	10,200	29	11,560	12,715					
24	6,505	7,150	7,650	7,935	9,580	10,725	31	12,155	13,370					
26	6,915	7,600	8,130	8,435	10,185	11,400	34	12,920	14,210					
28	7,145	7,850	8,400	8,715	10,520	11,775	36	13,345	14,680					
32	7,780	8,550	9,150	9,490	11,455	12,825	42	14,535	15,990					
34	8,010	8,800	9,415	9,770	11,790	13,200	44	14,960	16,455					


Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
24.5-32	485599	TL	16	30	9,900	DW20B, DW21B, DH21, DH21B, DH21H, DH21HB	24.5	69.4	31.6	206	35	45	875

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12	5,315	5,840	6,250	6,480	7,825	8,760	16	9,930	10,920
16	6,190	6,800	7,275	7,550	9,110	10,200	21	11,560	12,715
18	6,735	7,400	7,920	8,215	9,915	11,100	23	12,580	13,840
22	7,510	8,250	8,830	9,160	11,055	12,375	29	14,025	15,430
24	8,010	8,800	9,415	9,770	11,790	13,200	31	14,960	16,455
28	8,780	9,650	10,325	10,710	12,930	14,475	36	16,405	18,045
30	9,010	9,900	10,595	10,990	13,265	14,850	39	16,830	18,515

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
28LL-26	48L398	TL	14	24	7,600	DW25B	28.4	60.9	27.7	180	31	--	--

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12	4,625	5,080	5,435	5,640	6,805	7,620	16	8,635	9,500
14	5,025	5,520	5,905	6,125	7,395	8,280	18	9,385	10,320
16	5,460	6,000	6,420	6,660	8,040	9,000	21	10,200	11,220
18	5,825	6,400	6,850	7,105	8,575	9,600	23	10,880	11,970
20	6,190	6,800	7,275	7,550	9,110	10,200	26	11,560	12,715
22	6,505	7,150	7,650	7,935	9,580	10,725	29	12,155	13,370
24	6,915	7,600	8,130	8,435	10,185	11,400	31	12,920	14,210





TORC-TRAC II

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
30.5L-32	485596	TL	16	26	11,000	DH27, DH27B, DH27H, DH27HB	30.2	71.8	31.9	209	37	--	875

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12	6,325	6,950	7,435	7,715	9,315	10,425	16	11,815	12,995
14	6,915	7,600	8,130	8,435	10,185	11,400	18	12,920	14,210
16	7,510	8,250	8,830	9,160	11,055	12,375	21	14,025	15,430
18	8,010	8,800	9,415	9,770	11,790	13,200	23	14,960	16,455
20	8,510	9,350	10,005	10,380	12,530	14,025	26	15,895	17,485
22	9,010	9,900	10,595	10,990	13,265	14,850	29	16,830	18,515
24	9,555	10,500	11,235	11,655	14,070	15,750	31	17,850	19,635
26	10,010	11,000	11,770	12,210	14,740	16,500	34	18,700	20,570



TITAN MULTI TRAC C/S R-3

- Greater tread depth and more rubber on the contact surface to provide increased puncture resistance and longer tire life
- Shoulder design minimizes turf damage



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
13.6-16	474K81	TL	4	14	1,570	W10L, W12L	14.5	39.4	18.0	117	24	--	--

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Service		
							Inflation Pressure (psi)	10 mph (lbs)	6 mph (lbs)
12	1,300	1,430	1,530	1,585	1,915	2,145	16	2,430	2,675
14	1,430	1,570	1,680	1,745	2,105	2,355	18	2,670	2,935

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
21.5L-16.1SL	4743D9	TL	4	12	3,520	W16C, W16CH, W18C, W18CH	22.2	44.5	N/A	N/A	24	--	--

Inflation Pressure (psi)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
12	3,520	3,940	4,190	4,645	6,225



TITAN INDUSTRIAL CONTRACTOR R-4

- Extra-wide lugs with extensive overlap at the center, designed to resist buckling, tearing and cracking
- Excellent tread wear and roadability, the laterally designed lugs result in even wear



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
17.5L-24	4D6603	TL	6	20	4,400	DW14L, W15L, DW15L	17.3	48.5	21.9	143	32	--	--
Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Conditions						
							10 mph (lbs)	5 mph (lbs)	3 mph (lbs)				
16	3,405	3,740	3,890	3,965	4,225	4,675	5,010	5,610	6,245				
18	3,715	4,080	4,245	4,325	4,610	5,100	5,465	6,120	6,815				
20	4,005	4,400	4,575	4,665	4,970	5,500	5,895	6,600	7,350				




TITAN INDUSTRIAL TRACTOR LUG R-4

- Extra-wide lugs with extensive overlap at the center, designed to resist buckling, tearing and cracking
- Excellent tread wear and roadability, the laterally designed lugs result in even wear



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
14.9-24	486834	TL	8	30	5,080	DW11, W12, DW12, W13, DW13, DW13L	15.2	48.9	22.1	144	34	38	600
Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Conditions						
							10 mph (lbs)	5 mph (lbs)	3 mph (lbs)				
14	2,650	2,910	3,025	3,085	3,290	3,640	3,900	4,365	4,860				
16	2,910	3,200	3,330	3,390	3,615	4,000	4,290	4,800	5,345				
18	3,205	3,520	3,660	3,730	3,980	4,400	4,715	5,280	5,880				
20	3,405	3,740	3,890	3,965	4,225	4,675	5,010	5,610	6,245				
22	3,715	4,080	4,245	4,325	4,610	5,100	5,465	6,120	6,815				
24	3,915	4,300	4,470	4,560	4,860	5,375	5,760	6,450	7,180				
26	4,130	4,540	4,720	4,810	5,130	5,675	6,085	6,810	7,580				
30	4,625	5,080	5,285	5,385	5,740	6,350	6,805	7,620	8,485				



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32" in)	RCI	SRI
420/70-24	4866T2	TL	6	20	3,960	W13, W15L	17.0	47.7	21.5	141	35	--	575

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Conditions		
							10 mph (lbs)	5 mph (lbs)	3 mph (lbs)
16	3,005	3,300	3,430	3,500	3,730	4,125	4,420	4,950	5,510
18	3,310	3,640	3,785	3,860	4,115	4,550	4,880	5,460	6,080
20	3,605	3,960	4,120	4,200	4,475	4,950	5,305	5,940	6,615

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32" in)	RCI	SRI
16.9-24	486845	TL	8	28	5,840	DW14L, W15L, DW15L	17.8	51.5	23.2	152	35	--	625
16.9-24	486145	TL	12	38	7,150	DW14L, W15L, DW15L	17.4	50.6	23.0	153	35	--	625

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Conditions		
							10 mph (lbs)	5 mph (lbs)	3 mph (lbs)
16	3,515	3,860	4,015	4,090	4,360	4,825	5,170	5,790	6,445
18	3,915	4,300	4,470	4,560	4,860	5,375	5,760	6,450	7,180
20	4,260	4,680	4,865	4,960	5,290	5,850	6,270	7,020	7,815
22	4,495	4,940	5,140	5,235	5,580	6,175	6,620	7,410	8,250
24	4,730	5,200	5,410	5,510	5,875	6,500	6,970	7,800	8,685
26	5,025	5,520	5,740	5,850	6,240	6,900	7,395	8,280	9,220
28	5,315	5,840	6,075	6,190	6,600	7,300	7,825	8,760	9,755
END OF 486845									
30	5,595	6,150	6,395	6,520	6,950	7,690	8,240	9,225	10,270
32	5,825	6,400	6,655	6,785	7,230	8,000	8,575	9,600	10,690
34	6,005	6,600	6,865	6,995	7,460	8,250	8,845	9,900	11,020
36	6,325	6,950	7,230	7,365	7,855	8,690	9,315	10,425	11,605
38	6,505	7,150	7,435	7,580	8,080	8,940	9,580	10,725	11,940

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32" in)	RCI	SRI
17.5L-24	486803	TL	8	26	5,360	DW14L, W15L, DW15L	17.7	49.4	22.0	144	32	38	600
17.5L-24	486103	TL	12	36	6,600	DW14L, W15L, DW15L	17.6	49.2	23.5	150	32	38	600

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Conditions		
							10 mph (lbs)	5 mph (lbs)	3 mph (lbs)
16	3,405	3,740	3,890	3,965	4,225	4,675	5,010	5,610	6,245
18	3,715	4,080	4,245	4,325	4,610	5,100	5,465	6,120	6,815
20	4,005	4,400	4,575	4,665	4,970	5,500	5,895	6,600	7,350
22	4,260	4,680	4,865	4,960	5,290	5,850	6,270	7,020	7,815
24	4,625	5,080	5,285	5,385	5,740	6,350	6,805	7,620	8,485
26	4,880	5,360	5,575	5,680	6,055	6,700	7,180	8,040	8,950
END OF 486803									
28	5,025	5,520	5,740	5,850	6,240	6,900	7,395	8,280	9,220
30	5,315	5,840	6,075	6,190	6,600	7,300	7,825	8,760	9,755
32	5,595	6,150	6,395	6,520	6,950	7,690	8,240	9,225	10,270
34	5,825	6,400	6,655	6,785	7,230	8,000	8,575	9,600	10,690
36	6,005	6,600	6,865	6,995	7,460	8,250	8,845	9,900	11,020



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
18.4-24	486864	TL	8	24	6,400	W15L, W16A, W16L	19.4	53.5	23.8	156	35	40	650

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Conditions		
							10 mph (lbs)	5 mph (lbs)	3 mph (lbs)
16	4,260	4,680	4,865	4,960	5,290	5,850	6,270	7,020	7,815
18	4,625	5,080	5,285	5,385	5,740	6,350	6,805	7,620	8,485
20	5,025	5,520	5,740	5,850	6,240	6,900	7,395	8,280	9,220
22	5,315	5,840	6,075	6,190	6,600	7,300	7,825	8,760	9,755
24	5,825	6,400	6,655	6,785	7,230	8,000	8,575	9,600	10,690

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
18.4-26	486156	TL	12	36	8,800	W15L, DW15A, DW15L, DW16A, DW16L	19.2	56.1	25.3	165	35	41	675

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Conditions		
							10 mph (lbs)	5 mph (lbs)	3 mph (lbs)
16	4,370	4,800	4,990	5,090	5,425	6,000	6,430	7,200	8,015
20	5,170	5,680	5,905	6,020	6,420	7,100	7,610	8,520	9,485
22	5,595	6,150	6,395	6,520	6,950	7,690	8,240	9,225	10,270
26	6,190	6,800	7,070	7,210	7,685	8,500	9,110	10,200	11,355
30	6,915	7,600	7,905	8,055	8,590	9,500	10,185	11,400	12,690
32	7,145	7,850	8,165	8,320	8,870	9,815	10,520	11,775	13,110
36	7,780	8,550	8,890	9,065	9,660	10,690	11,455	12,825	14,280


Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
18.4-28	486058	TL	10	30	7,850	W15L, DW15L, W16L, DW16A, DW16L	18.8	57.8	26.4	172	35	--	700

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Conditions		
							10 mph (lbs)	5 mph (lbs)	3 mph (lbs)
16	4,495	4,940	5,140	5,235	5,580	6,175	6,620	7,410	8,250
18	5,025	5,520	5,740	5,850	6,240	6,900	7,395	8,280	9,220
20	5,315	5,840	6,075	6,190	6,600	7,300	7,825	8,760	9,755
22	5,825	6,400	6,655	6,785	7,230	8,000	8,575	9,600	10,690
26	6,505	7,150	7,435	7,580	8,080	8,940	9,580	10,725	11,940
28	6,735	7,400	7,695	7,845	8,360	9,250	9,915	11,100	12,360
30	7,145	7,850	8,165	8,320	8,870	9,815	10,520	11,775	13,110

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
19.5L-24	486861	TL	8	24	6,000	W15L, W16L, DW16A, DW16L	19.6	52.8	23.6	155	34	--	625
19.5L-24	486161	TL	12	34	7,600	DW16A, DW16L	19.3	51.9	23.3	153	34	--	625

See Next Page for the Load & Inflation Table





486861 & 486161 LOAD & INFLATION TABLE

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Conditions		
							10 mph (lbs)	5 mph (lbs)	3 mph (lbs)
16	4,005	4,400	4,575	4,665	4,970	5,500	5,895	6,600	7,350
18	4,495	4,940	5,140	5,235	5,580	6,175	6,620	7,410	8,250
20	4,730	5,200	5,410	5,510	5,875	6,500	6,970	7,800	8,685
22	5,170	5,680	5,905	6,020	6,420	7,100	7,610	8,520	9,485
24	5,460	6,000	6,240	6,360	6,780	7,500	8,040	9,000	10,020
END OF 486861									
26	5,825	6,400	6,655	6,785	7,230	8,000	8,575	9,600	10,690
28	6,005	6,600	6,865	6,995	7,460	8,250	8,845	9,900	11,020
30	6,325	6,950	7,230	7,365	7,855	8,690	9,315	10,425	11,605
32	6,735	7,400	7,695	7,845	8,360	9,250	9,915	11,100	12,360
34	6,915	7,600	7,905	8,055	8,590	9,500	10,185	11,400	12,690

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32" in)	RCI	SRI
21L-24	486175	TL	12	32	8,550	DW18A, DW18L	21.4	54.0	24.1	158	35	40	650

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	Cyclic Conditions		
							10 mph (lbs)	5 mph (lbs)	3 mph (lbs)
16	4,730	5,200	5,410	5,510	5,875	6,500	6,970	7,800	8,685
20	5,595	6,150	6,395	6,520	6,950	7,690	8,240	9,225	10,270
22	6,005	6,600	6,865	6,995	7,460	8,250	8,845	9,900	11,020
24	6,325	6,950	7,230	7,365	7,855	8,690	9,315	10,425	11,605
26	6,735	7,400	7,695	7,845	8,360	9,250	9,915	11,100	12,360
28	7,145	7,850	8,165	8,320	8,870	9,815	10,520	11,775	13,110
32	7,780	8,550	8,890	9,065	9,660	10,690	11,455	12,825	14,280





TITAN TRU-TRAC FRONT TRACTOR F-2

- Penetrates deep into soil for maximum steering control and minimal lateral side-slip because of its high center rib
- Used by original equipment manufacturers and offers excellent durability

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
5.50-16SL	462239	TT	6	56	1,050	4.00E, 4.25KA, 4.50E	6.0	27.5	N/A	N/A	17	--	--
Inflation Pressure (psi)		25 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)			
30		695		770		890		1,045		1,160			
34		760		845		975		1,140		1,270			
38		805		895		1,030		1,210		1,345			
42		880		975		1,125		1,320		1,470			
46		910		1,010		1,165		1,365		1,520			
50		965		1,070		1,235		1,450		1,610			
54		1,020		1,130		1,305		1,530		1,705			
56		1,050		1,165		1,345		1,575		1,755			

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
6.00-16SL	462375	TL	6	52	1,140	4.00E, 4.25KA, 4.50E, 4 1/2KB	6.6	28.6	N/A	N/A	18	--	--
Inflation Pressure (psi)		25 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)			
26		715		795		915		1,075		1,195			
30		785		870		1,005		1,180		1,310			
34		855		950		1,095		1,285		1,430			
38		935		1,040		1,195		1,405		1,560			
42		990		1,100		1,265		1,485		1,655			
46		1,050		1,165		1,345		1,575		1,755			
50		1,100		1,220		1,410		1,650		1,835			
52		1,140		1,265		1,460		1,710		1,905			

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
6.50-16SL	462381	TL	6	48	1,230	4.00E, 4.25KA, 4.50E, 5.50F	7.1	29.8	14.0	90	20	--	--
Inflation Pressure (psi)		25 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)			
22		715		795		915		1,075		1,195			
26		805		895		1,030		1,210		1,345			
30		910		1,010		1,165		1,365		1,520			
34		965		1,070		1,235		1,450		1,610			
38		1,050		1,165		1,345		1,575		1,755			
42		1,100		1,220		1,410		1,650		1,835			
46		1,200		1,330		1,535		1,800		2,005			
48		1,230		1,365		1,575		1,845		2,055			





TRU-TRAC FRONT TRACTOR

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
7.5L-15SL	462390	TL	6	44	1,430	5KB, 6LB	8.1	29.4	N/A	N/A	24	--	--

Inflation Pressure (psi)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
18	785	870	1,005	1,180	1,310
22	910	1,010	1,165	1,365	1,520
26	1,020	1,130	1,305	1,530	1,705
30	1,100	1,220	1,410	1,650	1,835
34	1,200	1,330	1,535	1,800	2,005
38	1,320	1,465	1,690	1,980	2,205
42	1,390	1,545	1,780	2,085	2,320
44	1,430	1,585	1,830	2,145	2,390

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
7.5L-16SL	462284	TT	8	56	1,710	5.50F, 6LB	8.5	31.3	N/A	N/A	23	--	--

Inflation Pressure (psi)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
30	1,140	1,265	1,460	1,710	1,905
34	1,230	1,365	1,575	1,845	2,055
38	1,360	1,510	1,740	2,040	2,270
42	1,430	1,585	1,830	2,145	2,390
46	1,520	1,685	1,945	2,280	2,540
50	1,610	1,785	2,060	2,415	2,690
56	1,710	1,900	2,190	2,565	2,855

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
7.5L-18SL	462278	TT	6	44	1,610	5.50F	8.5	33.3	N/A	N/A	23	--	--

Inflation Pressure (psi)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
18	880	975	1,125	1,320	1,470
22	1,020	1,130	1,305	1,530	1,705
26	1,140	1,265	1,460	1,710	1,905
30	1,230	1,365	1,575	1,845	2,055
34	1,360	1,510	1,740	2,040	2,270
38	1,480	1,645	1,895	2,220	2,470
42	1,570	1,745	2,010	2,355	2,620
44	1,610	1,785	2,060	2,415	2,690

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
7.5L-20SL	462393	TL	6	44	1,710	5.50F	8.0	35.2	N/A	N/A	23	--	--

See Next Page for the Load & Inflation Table



462393 LOAD & INFLATION TABLE						
Inflation Pressure (psi)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)	
18	935	1,040	1,195	1,405	1,560	
22	1,100	1,220	1,410	1,650	1,835	
26	1,230	1,365	1,575	1,845	2,055	
30	1,360	1,510	1,740	2,040	2,270	
34	1,480	1,645	1,895	2,220	2,470	
38	1,570	1,745	2,010	2,355	2,620	
44	1,710	1,900	2,190	2,565	2,855	

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
9.5L-15SL	462244	TT	8	48	1,870	8LB	10.1	31.4	N/A	N/A	27	--	--

Inflation Pressure (psi)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
22	1,100	1,220	1,410	1,650	1,835
26	1,230	1,365	1,575	1,845	2,055
30	1,360	1,510	1,740	2,040	2,270
34	1,480	1,645	1,895	2,220	2,470
38	1,570	1,745	2,010	2,355	2,620
42	1,710	1,900	2,190	2,565	2,855
46	1,820	2,020	2,330	2,730	3,040
48	1,870	2,075	2,395	2,805	3,125



TITAN TRU-TRAC MULTI-RIB F-2M

- Best for handling heavy loads on hard-packed surfaces
- Offers excellent load distribution and flotation
- Features a nylon carcass, durable tread compound and bead rim shield



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
7.50-16SL	466383	TL	6	44	1,480	5.50F, 6LB	8.3	31.0	N/A	N/A	21	--	--

Inflation Pressure (psi)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
18	805	895	1,030	1,210	1,345
22	935	1,040	1,195	1,405	1,560
26	1,050	1,165	1,345	1,575	1,755
30	1,140	1,265	1,460	1,710	1,905
34	1,230	1,365	1,575	1,845	2,055
38	1,360	1,510	1,740	2,040	2,270
42	1,430	1,585	1,830	2,145	2,390
44	1,480	1,645	1,895	2,220	2,470





TRU-TRAC MULTI-RIB

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
9.5L-15SL	466343	TL	6	36	1,520	8LB	10.1	31.7	14.8	95	21	--	--
Inflation Pressure (psi)			25 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)		
10			585		650		750		880		975		
14			785		870		1,005		1,180		1,310		
18			935		1,040		1,195		1,405		1,560		
22			1,100		1,220		1,410		1,650		1,835		
26			1,230		1,365		1,575		1,845		2,055		
30			1,360		1,510		1,740		2,040		2,270		
34			1,480		1,645		1,895		2,220		2,470		
36			1,520		1,685		1,945		2,280		2,540		

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
11L-15SL	466318	TL	8	44	2,090	8LB, 10LB	12.4	31.7	N/A	N/A	27	--	--
Inflation Pressure (psi)			25 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)		
18			1,140		1,265		1,460		1,710		1,905		
22			1,320		1,465		1,690		1,980		2,205		
26			1,480		1,645		1,895		2,220		2,470		
30			1,650		1,830		2,110		2,475		2,755		
34			1,760		1,955		2,255		2,640		2,940		
38			1,930		2,140		2,470		2,895		3,225		
42			2,040		2,265		2,610		3,060		3,405		
44			2,090		2,320		2,675		3,135		3,490		

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
16.5L-16.1SL	466352	TL	10	40	4,080	W14C, W14CH	17.8	41.9	N/A	N/A	36	--	--
Inflation Pressure (psi)			25 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)		
14			1,930		2,140		2,470		2,895		3,225		
18			2,340		2,595		2,995		3,510		3,910		
22			2,760		3,065		3,535		4,140		4,610		
26			3,080		3,420		3,940		4,620		5,145		
30			3,420		3,795		4,380		5,130		5,710		
34			3,740		4,150		4,785		5,610		6,245		
38			3,960		4,395		5,070		5,940		6,615		
40			4,080		4,530		5,220		6,120		6,815		



TITAN CONTRACTOR F-3

- Low section design for loader backhoe applications
- Designed for excellent durability and good road handling characteristics



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
11L-16SL	465317	TL	12	64	2,760	W8L, 8LB, W10L, 10LB	10.9	32.4	15.1	97	15	--	--
Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)							
32	1,635	1,760	1,955	2,255	2,640	2,940							
36	1,795	1,930	2,140	2,470	2,895	3,225							
42	2,000	2,150	2,385	2,750	3,225	3,590							
46	2,110	2,270	2,520	2,905	3,405	3,790							
52	2,295	2,470	2,740	3,160	3,705	4,125							
56	2,360	2,540	2,820	3,250	3,810	4,240							
60	2,490	2,680	2,975	3,430	4,020	4,475							
64	2,565	2,760	3,065	3,535	4,140	4,610							

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
14.5/75-16.1SL	465388	TL	10	40	3,200	W11C	13.7	35.5	16.4	105	18	--	--
Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)							
12	1,230	1,320	1,465	1,690	1,980	2,205							
16	1,590	1,710	1,900	2,190	2,565	2,855							
20	1,840	1,980	2,200	2,535	2,970	3,305							
24	2,110	2,270	2,520	2,905	3,405	3,790							
28	2,360	2,540	2,820	3,250	3,810	4,240							
32	2,565	2,760	3,065	3,535	4,140	4,610							
36	2,790	3,000	3,330	3,840	4,500	5,010							
40	2,975	3,200	3,550	4,095	4,800	5,345							

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
480/45-17	4652Q3	TL	134A8/B	29	4,680	16.00	18.8	33.9	14.9	98	15	--	--
Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)								
9	2,200	2,440	2,815	3,300	3,675								
12	2,600	2,885	3,330	3,900	4,340								
15	3,000	3,330	3,840	4,500	5,010								
17	3,300	3,665	4,225	4,950	5,510								
20	3,740	4,150	4,785	5,610	6,245								
23	4,080	4,530	5,220	6,120	6,815								
26	4,400	4,885	5,630	6,600	7,350								
29	4,680	5,195	5,990	7,020	7,815								





TITAN PACKER I-1

- Developed for the latest air seeders to firm the soil after the seed has been put into place
- This tire can operate at inflation pressures of 6 to 45 PSI, depending on soil conditions



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
20.5x5.5-12	41M356	TL	4	36	740	4JA	5.4	20.8	N/A	N/A	8	--	--
Inflation Pressure (psi)	30 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)				
12	320		360		380		420		505				
16	410		460		490		540		650				
20	480		540		570		635		760				
24	550		615		655		725		870				
28	615		690		730		810		970				
32	675		755		805		890		1,065				
36	740		830		880		975		1,170				

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
26/6.50-15	41M355	TL	4	45	1,400	4 1/2K, 4 1/2KB	6.4	26.6	12.5	80	8	--	--
Inflation Pressure (psi)	30 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)				
20	805		900		960		1,065		1,270				
25	935		1,045		1,115		1,235		1,475				
30	1,070		1,200		1,275		1,410		1,690				
35	1,170		1,310		1,390		1,545		1,850				
40	1,280		1,435		1,525		1,690		2,020				
45	1,400		1,570		1,665		1,850		2,210				

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
26/7.75-15	41M32T	TL	4	45	1,710	4 1/2KB, 5KB, 6LB	7.5	26.5	12.4	80	11	--	--
Inflation Pressure (psi)	30 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)				
20	965		1,080		1,150		1,275		1,525				
25	1,140		1,275		1,355		1,505		1,800				
30	1,280		1,435		1,525		1,690		2,020				
35	1,430		1,600		1,700		1,890		2,260				
40	1,570		1,760		1,870		2,070		2,480				
45	1,710		1,915		2,035		2,255		2,700				



TITAN DURA-LIFE I-1

- This popular OEM tire offers wide ribs for good ground contact and excellent treadwear
- Straight ahead directional control is maximized with a series of straight circumferential grooves and ribs



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
5.90-15SL	41M353	TL	4	36	1,140	4 1/2KB, 5KB	6.5	26.6	12.3	79	7	--	--
Inflation Pressure (psi)		30 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)			
12		495		555		590		655		780			
16		640		715		760		845		1,010			
20		740		830		880		975		1,170			
24		855		960		1,015		1,130		1,350			
28		935		1,045		1,115		1,235		1,475			
32		1,050		1,175		1,250		1,385		1,660			
36		1,140		1,275		1,355		1,505		1,800			

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
6.50-16SL	418381	TL	6	44	1,710	4.00E, 4.25KA, 4.50E, 4 1/2KB	7.1	29.6	13.5	88	7	--	--
Inflation Pressure (psi)		30 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)			
20		1,020		1,140		1,215		1,345		1,610			
24		1,140		1,275		1,355		1,505		1,800			
28		1,280		1,435		1,525		1,690		2,020			
32		1,390		1,555		1,655		1,835		2,195			
36		1,520		1,700		1,810		2,005		2,400			
40		1,610		1,805		1,915		2,125		2,545			
44		1,710		1,915		2,035		2,255		2,700			

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
6.70-15SL	41M388	TL	6	44	1,610	4 1/2KB, 5KB	7.6	28.4	12.9	84	7	--	--
Inflation Pressure (psi)		30 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)			
20		935		1,045		1,115		1,235		1,475			
24		1,070		1,200		1,275		1,410		1,690			
28		1,170		1,310		1,390		1,545		1,850			
32		1,280		1,435		1,525		1,690		2,020			
36		1,390		1,555		1,655		1,835		2,195			
40		1,520		1,700		1,810		2,005		2,400			
44		1,610		1,805		1,915		2,125		2,545			



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
9.00-16SL	418348	TL	10	52	3,300	6LB, W8L, 8LB	9.3	32.7	14.6	96	10	--	--
Inflation Pressure (psi)	30 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)				
28	2,200		2,465		2,620		2,905		3,475				
32	2,400		2,690		2,855		3,170		3,790				
36	2,600		2,910		3,095		3,430		4,110				
40	2,760		3,090		3,285		3,645		4,360				
44	2,910		3,260		3,465		3,840		4,600				
48	3,080		3,450		3,665		4,065		4,865				
52	3,300		3,695		3,925		4,355		5,215				

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
9.00-24SL	41M3J8	TL	8	40	3,520	W8H	10.8	42.7	16.4	126	10	--	--
Inflation Pressure (psi)	30 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)				
16	1,870		2,095		2,225		2,470		2,955				
20	2,200		2,465		2,620		2,905		3,475				
24	2,540		2,845		3,025		3,355		4,015				
28	2,830		3,170		3,370		3,735		4,470				
32	3,080		3,450		3,665		4,065		4,865				
36	3,300		3,695		3,925		4,355		5,215				
40	3,520		3,940		4,190		4,645		5,560				





TITAN DURA-LIFE PLANTER I-1

- Designed to minimize seed bed compaction
- Open center and ribs at tread edge straddle seed placement location
- Features one rib on each shoulder



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
7.50-20SL	41A3X7	TL	8	48	2,540	5.50F	8.4	35.3	16.3	106	18	--	--
Inflation Pressure (psi)				30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)		5 mph (lbs)				
24				1,610	1,805	1,915	2,125		2,545				
28				1,760	1,970	2,095	2,325		2,780				
32				1,930	2,160	2,295	2,550		3,050				
36				2,090	2,340	2,485	2,760		3,300				
40				2,270	2,540	2,700	2,995		3,585				
44				2,400	2,690	2,855	3,170		3,790				
48				2,540	2,845	3,025	3,355		4,015				



TITAN STUBBLE GUARD I-1

- Kevlar® breakers
- Heavy duty carcass
- Higher ply ratings
- Premium tread compound
- Reduced stubble punctures
- Reduced stubble penetrations
- Enhanced load capacity
- Reduced stubble damage



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
9.5L-15SL	SBG3D9	TL	16	80	3,640	8LB	9.6	30.4	13.8	90	11	--	--
Inflation Pressure (psi)				30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)		5 mph (lbs)				
44				2,470	2,765	2,940	3,260		3,905				
50				2,680	3,000	3,190	3,540		4,235				
56				2,910	3,260	3,465	3,840		4,600				
62				3,080	3,450	3,665	4,065		4,865				
68				3,300	3,695	3,925	4,355		5,215				
74				3,420	3,830	4,070	4,515		5,405				
80				3,640	4,075	4,330	4,805		5,750				



STUBBLE GUARD

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
10.00-15SL	SBG366	TL	16	72	4,680	8LB	11.0	34.0	15.3	100	11	--	--
Inflation Pressure (psi)			30 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)		
36			3,000		3,360		3,570		3,960		4,740		
42			3,300		3,695		3,925		4,355		5,215		
48			3,640		4,075		4,330		4,805		5,750		
54			3,860		4,325		4,595		5,095		6,100		
60			4,180		4,680		4,975		5,520		6,605		
66			4,400		4,930		5,235		5,810		6,950		
72			4,680		5,240		5,570		6,180		7,395		

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
11L-15SL	SBG315	TL	18	80	4,180	8LB, 10LB	10.5	30.3	13.7	90	11	--	--
Inflation Pressure (psi)			30 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)		
44			2,910		3,260		3,465		3,840		4,600		
50			3,200		3,585		3,810		4,225		5,055		
56			3,420		3,830		4,070		4,515		5,405		
62			3,640		4,075		4,330		4,805		5,750		
68			3,860		4,325		4,595		5,095		6,100		
74			4,080		4,570		4,855		5,385		6,445		
80			4,180		4,680		4,975		5,520		6,605		

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
12.5L-15SL	SBG327	TL	20	80	4,940	10LB	12.3	31.8	14.3	94	11	--	--
Inflation Pressure (psi)			30 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)		
44			3,420		3,830		4,070		4,515		5,405		
50			3,740		4,190		4,450		4,935		5,910		
56			3,960		4,435		4,710		5,225		6,255		
62			4,300		4,815		5,115		5,675		6,795		
68			4,540		5,085		5,405		5,995		7,175		
74			4,800		5,375		5,710		6,335		7,585		
80			4,940		5,535		5,880		6,520		7,805		



TITAN HI-FLOTATION I-1

- Noted for its maximum flotation
- Features wide tread design, large footprint, deep grooves and low section height design



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
9.5L-14SL	410399	TL	8	44	2,400	8KB	9.8	29.5	13.2	86	11	--	--
Inflation Pressure (psi)	30 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)				
20	1,390		1,555		1,655		1,835		2,195				
24	1,570		1,760		1,870		2,070		2,480				
28	1,760		1,970		2,095		2,325		2,780				
32	1,930		2,160		2,295		2,550		3,050				
36	2,090		2,340		2,485		2,760		3,300				
40	2,200		2,465		2,620		2,905		3,475				
44	2,400		2,690		2,855		3,170		3,790				

Tire Size	Catalog #	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
9.5L-15SL	410344	TL	8	112B	44	2,470	8LB	9.7	30.7	13.8	90	11	--	--
9.5L-15SL	4103D7	TL	12	N/A	64	3,200	8LB	9.8	30.2	13.5	89	11	--	--
Inflation Pressure (psi)	30 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)					
20	1,430		1,600		1,700		1,890		2,260					
24	1,650		1,850		1,965		2,180		2,605					
28	1,820		2,040		2,165		2,400		2,875					
32	2,040		2,285		2,430		2,695		3,225					
36	2,200		2,465		2,620		2,905		3,475					
40	2,340		2,620		2,785		3,090		3,695					
44	2,470		2,765		2,940		3,260		3,905					
END OF 410344														
48	2,600		2,910		3,095		3,430		4,110					
52	2,760		3,090		3,285		3,645		4,360					
56	2,910		3,260		3,465		3,840		4,600					
60	3,000		3,360		3,570		3,960		4,740					
64	3,200		3,585		3,810		4,225		5,055					





HI-FLOTATION

Tire Size	Catalog #	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
11L-15SL	410318	TL	8	113B	36	2,540	8LB, 10LB	10.8	30.8	13.8	90	11	--	--
11L-15SL	410317	TL	12	N/A	52	3,200	8LB, 10LB	11.8	30.9	14.3	92	11	--	--


Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
12	1,140	1,275	1,355	1,505	1,800
16	1,430	1,600	1,700	1,890	2,260
20	1,710	1,915	2,035	2,255	2,700
24	1,930	2,160	2,295	2,550	3,050
28	2,150	2,410	2,560	2,840	3,395
32	2,340	2,620	2,785	3,090	3,695
36	2,540	2,845	3,025	3,355	4,015
END OF 410318					
40	2,760	3,090	3,285	3,645	4,360
44	2,910	3,260	3,465	3,840	4,600
48	3,080	3,450	3,665	4,065	4,865
52	3,200	3,585	3,810	4,225	5,055

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
12.5L-15SL	410340	TL	8	36	3,000	10LB	12.1	32.1	14.3	95	11	--	--
12.5L-15SL	410341	TL	10	44	3,420	10LB	11.7	32.3	14.4	95	11	--	--
12.5L-15SL	410305	TL	12	52	3,860	10LB	12.0	32.0	14.3	94	11	--	--

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
12	1,320	1,480	1,570	1,740	2,085
16	1,710	1,915	2,035	2,255	2,700
20	1,980	2,220	2,355	2,615	3,130
24	2,270	2,540	2,700	2,995	3,585
28	2,540	2,845	3,025	3,355	4,015
32	2,760	3,090	3,285	3,645	4,360
36	3,000	3,360	3,570	3,960	4,740
END OF 410340					
40	3,200	3,585	3,810	4,225	5,055
44	3,420	3,830	4,070	4,515	5,405
END OF 410341					
48	3,640	4,075	4,330	4,805	5,750
52	3,860	4,325	4,595	5,095	6,100

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
12.5L-16SL	41L353	TL	14	56	4,180	W10L, 10LB	11.9	31.9	14.3	95	11	--	--

See Next Page for the Load & Inflation Table



41L353 LOAD & INFLATION TABLE

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
32	2,910	3,260	3,465	3,840	4,600
36	3,080	3,450	3,665	4,065	4,865
40	3,300	3,695	3,925	4,355	5,215
44	3,520	3,940	4,190	4,645	5,560
48	3,740	4,190	4,450	4,935	5,910
52	3,960	4,435	4,710	5,225	6,255
56	4,180	4,680	4,975	5,520	6,605


Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
14L-16.1SL	410368	TL	8	32	3,860	W11C	14.2	37.2	16.3	108	12	--	--
14L-16.1SL	410362	TL	12	44	4,680	W11C	14.4	36.8	16.5	108	12	--	--

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
12	1,820	2,040	2,165	2,400	2,875
16	2,340	2,620	2,785	3,090	3,695
20	2,760	3,090	3,285	3,645	4,360
24	3,200	3,585	3,810	4,225	5,055
28	3,520	3,940	4,190	4,645	5,560
32	3,860	4,325	4,595	5,095	6,100
END OF 410368					
36	4,180	4,680	4,975	5,520	6,605
40	4,400	4,930	5,235	5,810	6,950
44	4,680	5,240	5,570	6,180	7,395

Tire Size	Catalog #	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
16.5L-16.1SL	410350	TL	10	N/A	36	5,200	W14C, W14CH	17.1	40.9	18.0	119	14	--	--
16.5L-16.1SL	4103L1	TL	14	145B	48	6,400	W14C, W14CH	17.1	40.7	18.1	119	14	--	--

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
12	2,340	2,620	2,785	3,090	3,695
16	3,000	3,360	3,570	3,960	4,740
20	3,520	3,940	4,190	4,645	5,560
24	3,960	4,435	4,710	5,225	6,255
28	4,400	4,930	5,235	5,810	6,950
32	4,800	5,375	5,710	6,335	7,585
36	5,200	5,825	6,190	6,865	8,215
END OF 410350					
40	5,680	6,360	6,760	7,500	8,975
44	6,000	6,720	7,140	7,920	9,480
48	6,400	7,170	7,615	8,450	10,110





HI-FLOTATION

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
19L-16.1SL	4103H7	TL	10	32	6,000	W16C, W16CH	19.4	44.0	19.2	127	17	--	--
19L-16.1SL	4109H7	TL	18	52	8,250	W16C, W16CH	19.3	44.5	19.9	131	16	--	--
Inflation Pressure (psi)				30 mph (lbs)	20 mph (lbs)	15 mph (lbs)			10 mph (lbs)				
12				2,910	3,260	3,465			3,840				
16				3,740	4,190	4,450			4,935				
20				4,400	4,930	5,235			5,810				
24				4,940	5,535	5,880			6,520				
28				5,520	6,180	6,570			7,285				
32				6,000	6,720	7,140			7,920				
END OF 4103H7													
36				6,600	7,390	7,855			8,710				
40				6,950	7,785	8,270			9,175				
44				7,400	8,290	8,805			9,770				
48				7,850	8,790	9,340			10,360				
52				8,250	9,240	9,820			10,890				

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
21.5L-16.1SL	4103M3	TL	8	24	6,000	W16C, W16CH, W18C, W18CH	21.6	45.8	20.1	133	17	--	--
21.5L-16.1SL	41L349	TL	10	28	6,600	W16C, W16CH, W18C, W18CH	21.8	46.3	20.4	135	17	--	--
21.5L-16.1SL	4103Q4	TL	18	44	8,800	W16CH, W18CH	22.1	44.9	19.7	130	17	--	--
Inflation Pressure (psi)				30 mph (lbs)	20 mph (lbs)	15 mph (lbs)			10 mph (lbs)				
12				3,520	3,940	4,190			4,645				
16				4,400	4,930	5,235			5,810				
20				5,200	5,825	6,190			6,865				
24				6,000	6,720	7,140			7,920				
END OF 4103M3													
26				6,400	7,170	7,615			8,450				
28				6,600	7,390	7,855			8,710				
END OF 41L349													
32				7,150	8,010	8,510			9,440				
34				7,600	8,510	9,045			10,030				
38				8,050	9,015	9,580			10,625				
42				8,800	9,855	10,470			11,615				
44				8,800	9,855	10,470			11,615				





TITAN AGRAGROW I-3

- Non-directional lug pattern enables smooth movement and stability in the field for tillage and forage equipment
- High flotation profile reduces soil compaction and provides flexibility in variable conditions and applications
- Radial construction allows for lower air pressures and reduced ground pressure
- Large center lug elements for improved roading and wear
- Open shoulder for free-rolling traction and cleanout, especially in wetter conditions



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
500/60R22.5IMP	4A682F	TL	155D	58	8,550	15.00, 16.00, AG16.00 , 17.00	19.9	47.6	21.3	142	28	--	--
Inflation Pressure (psi)		40 mph (lbs)		30 mph (lbs)		20 mph (lbs)		10 mph (lbs)		5 mph (lbs)			
35		5,680		6,875		8,575		9,825		12,375			
41		6,400		7,745		9,665		11,070		13,940			
46		7,150		8,650		10,795		12,370		15,570			
52		7,850		9,500		11,855		13,580		17,100			
58		8,550		10,345		12,910		14,790		18,620			

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
560/45R22.5IMP	4A68LL	TL	152D	58	7,850	AG16.00	21.3	42.6	18.9	128	24	--	--
Inflation Pressure (psi)		40 mph (lbs)		30 mph (lbs)		20 mph (lbs)		10 mph (lbs)		5 mph (lbs)			
35		5,200		6,290		7,850		8,995		11,320			
41		6,000		7,260		9,060		10,380		13,070			
46		6,600		7,985		9,965		11,420		14,375			
52		7,150		8,650		10,795		12,370		15,570			
58		7,850		9,500		11,855		13,580		17,100			

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
560/60R22.5IMP	4A68CL	TL	161D	58	10,200	16.00, AG16.00 , 17.00, AG20.00	21.9	50.3	22.3	151	30	--	--
Inflation Pressure (psi)		40 mph (lbs)		30 mph (lbs)		20 mph (lbs)		10 mph (lbs)		5 mph (lbs)			
35		6,800		8,230		10,270		11,765		14,815			
41		7,600		9,195		11,475		13,150		16,550			
46		8,550		10,345		12,910		14,790		18,620			
52		9,350		11,315		14,120		16,175		20,365			
58		10,200		12,340		15,400		17,645		22,210			



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
600/50R22.5IMP	4A68ET	TL	159D	58	9,650	AG20.00	24.2	46.4	20.8	140	27	--	--
Inflation Pressure (psi)	40 mph (lbs)		30 mph (lbs)		20 mph (lbs)		10 mph (lbs)		5 mph (lbs)				
35	6,400		7,745		9,665		11,070		13,940				
41	7,150		8,650		10,795		12,370		15,570				
46	8,050		9,740		12,155		13,925		17,530				
52	8,800		10,650		13,290		15,225		19,170				
58	9,650		11,675		14,570		16,695		21,015				

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
600/55R26.5IMP	4A68P5	TL	165D	58	11,400	AG20.00	24.4	52.7	23.8	159	29	--	--
Inflation Pressure (psi)	40 mph (lbs)		30 mph (lbs)		20 mph (lbs)		10 mph (lbs)		5 mph (lbs)				
35	7,400		8,955		11,175		12,800		16,120				
41	8,550		10,345		12,910		14,790		18,620				
46	9,350		11,315		14,120		16,175		20,365				
52	10,200		12,340		15,400		17,645		22,210				
58	11,400		13,795		17,215		19,720		24,830				

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
650/55R26.5IMP	4A68VB	TL	169D	58	12,800	AG20.00	25.9	55.1	25.0	167	31	--	--
Inflation Pressure (psi)	40 mph (lbs)		30 mph (lbs)		20 mph (lbs)		10 mph (lbs)		5 mph (lbs)				
35	8,550		10,345		12,910		14,790		18,620				
41	9,650		11,675		14,570		16,695		21,015				
46	10,500		12,705		15,855		18,165		22,870				
52	11,700		14,155		17,665		20,240		25,480				
58	12,800		15,490		19,330		22,145		27,880				

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
710/40R22.5IMP	4A686R	TL	161D	58	10,200	AG24.00	28.2	45.4	20.3	137	26	--	--
Inflation Pressure (psi)	40 mph (lbs)		30 mph (lbs)		20 mph (lbs)		10 mph (lbs)		5 mph (lbs)				
35	6,800		8,230		10,270		11,765		14,815				
41	7,850		9,500		11,855		13,580		17,100				
46	8,550		10,345		12,910		14,790		18,620				
52	9,350		11,315		14,120		16,175		20,365				
58	10,200		12,340		15,400		17,645		22,210				



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
710/45R22.5IMP	4A68AV	TL	165D	58	11,400	AG24.00	N/A	N/A	N/A	N/A	29	--	--
Inflation Pressure (psi)		40 mph (lbs)		30 mph (lbs)		20 mph (lbs)		10 mph (lbs)		5 mph (lbs)			
35		7,600		9,195		11,475		13,150		16,550			
41		8,550		10,345		12,910		14,790		18,620			
46		9,350		11,315		14,120		16,175		20,365			
52		10,500		12,705		15,855		18,165		22,870			
58		11,400		13,795		17,215		19,720		24,830			

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
710/50R26.5IMP	4A68NK	TL	171D	58	13,600	AG20.00, AG24.00	29.5	54.2	24.8	165	31	--	--
Inflation Pressure (psi)		40 mph (lbs)		30 mph (lbs)		20 mph (lbs)		10 mph (lbs)		5 mph (lbs)			
35		8,800		10,650		13,290		15,225		19,170			
41		10,200		12,340		15,400		17,645		22,210			
46		11,000		13,310		16,610		19,030		23,960			
52		12,300		14,885		18,575		21,280		26,795			
58		13,600		16,455		20,535		23,530		29,620			





TITAN CONTRACTOR-T I-3

- An implement tire specially designed for high traction applications
- Frequently used on the front of backhoes



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
10.5/80-18	46W3X8	TL	6	33	2,830	W8, 9, W9	10.7	36.1	16.6	108	29	--	--
10.5/80-18	46W3J8	TL	10	54	3,840	W8, 9, W9	10.9	35.9	16.7	108	29	--	--

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
20	1,980	2,100	2,220	2,355	2,615	3,130
22	2,150	2,280	2,410	2,560	2,840	3,395
24	2,270	2,405	2,540	2,700	2,995	3,585
26	2,400	2,545	2,690	2,855	3,170	3,790
28	2,540	2,690	2,845	3,025	3,355	4,015
30	2,680	2,840	3,000	3,190	3,540	4,235
32	2,760	2,925	3,090	3,285	3,645	4,360
END OF 46W3X8						
34	2,910	3,085	3,260	3,465	3,840	4,600
36	3,000	3,180	3,360	3,570	3,960	4,740
38	3,080	3,265	3,450	3,665	4,065	4,865
40	3,200	3,390	3,585	3,810	4,225	5,055
44	3,420	3,625	3,830	4,070	4,515	5,405
48	3,640	3,860	4,075	4,330	4,805	5,750
52	3,740	3,965	4,190	4,450	4,935	5,910
54	3,840	4,070	4,300	4,570	5,070	6,065

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
12.5/80-18	46W3J9	TL	10	46	4,710	9, W9, 11	12.1	38.3	18.0	116	31	--	--

Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
20	2,410	2,680	3,000	3,190	3,565	3,750
24	2,770	3,080	3,450	3,665	4,095	4,310
28	3,080	3,420	3,830	4,070	4,550	4,790
32	3,365	3,740	4,190	4,450	4,975	5,235
36	3,565	3,960	4,435	4,710	5,265	5,545
40	3,870	4,300	4,815	5,115	5,720	6,020
44	4,085	4,540	5,085	5,405	6,040	6,355
46	4,240	4,710	5,275	5,605	6,265	6,595



TITAN CONTRACTOR II I-3

- More robust design for use on the front of large backhoes



Tire Size	Catalog #	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
12.5/80-18	42E3T7	TL	12	139A8	56	5,360	9, W9, 11	12.5	38.8	17.5	115	32	--	--
Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)								
20	2,410	2,680	3,000	3,190	3,565	3,750								
26	2,880	3,200	3,585	3,810	4,255	4,480								
32	3,365	3,740	4,190	4,450	4,975	5,235								
38	3,760	4,180	4,680	4,975	5,560	5,850								
44	4,085	4,540	5,085	5,405	6,040	6,355								
48	4,320	4,800	5,375	5,710	6,385	6,720								
52	4,570	5,080	5,690	6,045	6,755	7,110								
56	4,825	5,360	6,005	6,380	7,130	7,505								



TITAN TI422 I-3

- Designed for low horsepower traction requirements, the TI422 offers good roadability and excellent durability



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
12.5/80-18NHS	4223J9	TL	10	46	4,680	9, W9, 11	12.0	38.8	17.4	114	34	--	--
Inflation Pressure (psi)	30 mph (lbs)	25 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)							
20	2,410	2,680	2,840	3,000	3,190	3,540							
24	2,770	3,080	3,265	3,450	3,665	4,065							
28	3,080	3,420	3,625	3,830	4,070	4,515							
32	3,365	3,740	3,965	4,190	4,450	4,935							
36	3,565	3,960	4,200	4,435	4,710	5,225							
40	3,870	4,300	4,560	4,815	5,115	5,675							
44	4,085	4,540	4,810	5,085	5,405	5,995							
46	4,240	4,710	4,995	5,275	5,605	6,215							





TITAN TRACTION IMPLEMENT I-3

- Designed for low horsepower traction requirements, the Traction Implement offers good roadability and excellent durability



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
7.50-20SL	422303	TL	4	28	1,760	5.50F	8.3	35.2	N/A	N/A	17	--	--

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
12	935	1,045	1,115	1,235	1,475
16	1,170	1,310	1,390	1,545	1,850
20	1,390	1,555	1,655	1,835	2,195
24	1,610	1,805	1,915	2,125	2,545
28	1,760	1,970	2,095	2,325	2,780

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
7.50-24SL	422204	TT	4	28	1,870	W7	9.2	39.7	N/A	N/A	17	--	--

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
12	990	1,110	1,180	1,305	1,565
16	1,230	1,380	1,465	1,625	1,945
20	1,480	1,660	1,760	1,955	2,340
24	1,650	1,850	1,965	2,180	2,605
28	1,870	2,095	2,225	2,470	2,955

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
13.50-16.1SL	499505	TL	6	24	3,520	W11C	14.2	40.6	17.9	118	23	--	--

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
12	2,040	2,285	2,430	2,695	3,225
16	2,600	2,910	3,095	3,430	4,110
20	3,080	3,450	3,665	4,065	4,865
24	3,520	3,940	4,190	4,645	5,560



TITAN HIGHWAY IMPLEMENT FI

- Offers D.O.T. compliance for approved operation at highway speeds
- Noted for its great handling and towing characteristics



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
9.5L-15FI	41H3A3	TL	F	90	3,420	8LB	9.4	30.3	14.0	91	11	--	--

Inflation Pressure (psi)	62 mph (lbs)	Duals	30 mph (lbs)	Duals
60	2,680	2,360	3,215	2,830
65	2,830	2,490	3,395	2,990
70	2,910	2,560	3,490	3,070
75	3,080	2,710	3,695	3,250
80	3,200	2,815	3,840	3,380
85	3,300	2,905	3,960	3,485
90	3,420	3,010	4,105	3,610

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
13.50-15FI	41H3D0	TL	D	45	3,300	10J, 10LB, 11J	13.2	32.3	14.7	96	11	--	--
13.50-15FI	41H3F0	TL	F	75	4,540	10J, 10LB, 11J	13.8	31.9	14.8	96	11	--	--

Inflation Pressure (psi)	62 mph (lbs)	Duals	30 mph (lbs)	Duals
15	1,760	1,550	2,110	1,855
20	2,090	1,840	2,510	2,210
25	2,400	2,110	2,880	2,535
30	2,680	2,360	3,215	2,830
35	2,910	2,560	3,490	3,070
40	3,080	2,710	3,695	3,250
45	3,300	2,905	3,960	3,485
END OF 41H3D0				
50	3,520	3,100	4,225	3,720
55	3,740	3,290	4,490	3,950
60	3,960	3,485	4,750	4,180
65	4,180	3,680	5,015	4,415
70	4,300	3,785	5,160	4,540
75	4,540	3,995	5,450	4,795





HIGHWAY IMPLEMENT

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
16.5L-16.1FI	41H3E0	TL	E	60	6,450	W14C, W14CH	17.3	41.3	18.2	120	11	--	--

Inflation Pressure (psi)	62 mph (lbs)	Duals	30 mph (lbs)	Duals
30	4,300	3,785	5,160	4,540
35	4,680	4,120	5,615	4,940
40	5,080	4,470	6,095	5,365
45	5,520	4,860	6,625	5,830
50	5,840	5,140	7,010	6,170
55	6,150	5,410	7,380	6,495
60	6,450	5,675	7,740	6,810





TITAN FLO-TRAC RIB HF-1

- Designed for maximum flotation and durability
- Low section height provides improved handling



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
25x7.50-15NHS	41F378	TL	6	45	1,230	6LB	7.8	24.9	11.6	74	8	--	--

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
15	640	715	760	845	1,010
20	760	850	905	1,005	1,200
25	855	960	1,015	1,130	1,350
30	965	1,080	1,150	1,275	1,525
35	1,050	1,175	1,250	1,385	1,660
40	1,140	1,275	1,355	1,505	1,800
45	1,230	1,380	1,465	1,625	1,945

Tire Size	Catalog #	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
27x9.50-15NHS	41F306	TL	8	102B	60	1,870	7JA, 8LB	9.7	26.9	12.6	81	9	--	--

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
15	855	960	1,015	1,130	1,350
20	990	1,110	1,180	1,305	1,565
25	1,140	1,275	1,355	1,505	1,800
30	1,280	1,435	1,525	1,690	2,020
35	1,390	1,555	1,655	1,835	2,195
40	1,480	1,660	1,760	1,955	2,340
45	1,610	1,805	1,915	2,125	2,545
50	1,710	1,915	2,035	2,255	2,700
55	1,820	2,040	2,165	2,400	2,875
60	1,870	2,095	2,225	2,470	2,955

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
31x13.50-15NHS	41N397	TL	8	45	2,600	10LB	13.6	32.4	14.9	97	10	--	--
31x13.50-15NHS	41N3U9	TL	14	90	3,960	10LB	13.5	31.8	14.4	94	10	--	--

See Next Page for the Load & Inflation Table





FLO-TRAC RIB

41N397 & 41N3U9 LOAD & INFLATION TABLE

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
15	1,390	1,555	1,655	1,835	2,195
20	1,650	1,850	1,965	2,180	2,605
25	1,870	2,095	2,225	2,470	2,955
30	2,090	2,340	2,485	2,760	3,300
35	2,270	2,540	2,700	2,995	3,585
40	2,470	2,765	2,940	3,260	3,905
45	2,600	2,910	3,095	3,430	4,110
END OF 41N397					
50	2,760	3,090	3,285	3,645	4,360
55	2,910	3,260	3,465	3,840	4,600
60	3,080	3,450	3,665	4,065	4,865
65	3,300	3,695	3,925	4,355	5,215
70	3,420	3,830	4,070	4,515	5,405
75	3,520	3,940	4,190	4,645	5,560
80	3,640	4,075	4,330	4,805	5,750
85	3,860	4,325	4,595	5,095	6,100
90	3,960	4,435	4,710	5,225	6,255





TITAN MULTI TRAC C/S HF-1

- Greater tread depth and more rubber on the contact surface to provide increased puncture resistance and longer tire life
- Shoulder design minimizes turf damage



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
18x8.50-10NHS	4743U1	TL	4	22	830	6.00-1-55, 1-70, 1-90, 6JA, 7.00-1-55, 1-70, 1-90, 7JA	8.0	18.2	8.3	54	10	--	--
Inflation Pressure (psi)													
			10 mph (lbs)		15 mph (lbs)		20 mph (lbs)		25 mph (lbs)		30 mph (lbs)		
10			520		495		470		440		415		
12			585		555		525		495		470		
14			640		610		575		545		510		
16			695		660		625		590		555		
18			740		705		665		630		590		
20			785		745		705		665		630		
22			830		790		745		705		665		

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
20x8.00-10NHS	474318	TL	4	24	895	6.00-1-55, 1-70, 1-90, 6JA, 7.00-1-55, 1-70, 1-90, 7JA	8.0	20.2	9.2	60	10	--	--
20x8.00-10NHS	47L4X2	TL	10	62	1,570	6.00-1-55, 1-70, 1-90, 6JA, 7.00-1-55, 1-70, 1-90, 7JA	8.0	20.3	N/A	N/A	10	--	--
Inflation Pressure (psi)			10 mph (lbs)		15 mph (lbs)		20 mph (lbs)		25 mph (lbs)		30 mph (lbs)		
12			600		570		540		510		480		
16			715		680		645		610		570		
20			805		765		725		685		645		
24			895		850		805		760		715		
END OF 474318													
28			990		940		890		840		790		
32			1,070		1,015		965		910		855		
36			1,140		1,085		1,025		970		910		
42			1,230		1,170		1,105		1,045		985		
48			1,360		1,290		1,225		1,155		1,090		
52			1,390		1,320		1,250		1,180		1,110		
58			1,520		1,445		1,370		1,290		1,215		
62			1,570		1,490		1,415		1,335		1,255		





MULTI TRAC C/S

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
23x8.50-12NHS	474372	TL	6	34	1,440	6.0AT, 6.5AT, 7.00-I-55, I-70, I-90, 7JA, 7.0AT	8.5	22.5	10.2	67	12	--	--
				Inflation Pressure (psi)	10 mph (lbs)	15 mph (lbs)	20 mph (lbs)	25 mph (lbs)					
				10	715	680	645	610					
				14	855	810	770	725					
				18	990	940	890	840					
				22	1,100	1,045	990	935					
				26	1,230	1,170	1,105	1,045					
				30	1,360	1,290	1,225	1,155					
				34	1,440	1,370	1,295	1,225					
<hr/>													
Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
24x8.50-14NHS	474324	TL	4	22	1,230	6.0AT, 6.5AT, 7.00-I-55, I-70, I-90, 7KB, 7.0AT	8.6	24.2	10.8	71	11	--	--
				Inflation Pressure (psi)	10 mph (lbs)	15 mph (lbs)	20 mph (lbs)	25 mph (lbs)					
				10	785	745	705	665					
				12	855	810	770	725					
				14	935	890	840	795					
				16	1,020	970	920	865					
				18	1,100	1,045	990	935					
				20	1,170	1,110	1,055	995					
				22	1,230	1,170	1,105	1,045					
<hr/>													
Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
25x8.50-14NHS	474371	TL	6	32	1,640	6.0AT, 6.5AT, 7.00-I-55, I-70, I-90, 7KB, 7.0AT	8.7	25.6	11.8	76	11	--	--
25x8.50-14NHS	474071	TL	10	54	2,200	6.0AT, 6.5AT, 7.00-I-55, I-70, I-90, 7KB, 7.0AT	8.9	26.0	11.9	77	11	--	--
				Inflation Pressure (psi)	10 mph (lbs)	15 mph (lbs)	20 mph (lbs)	25 mph (lbs)					
				18	1,170	1,110	1,055	995					
				20	1,230	1,170	1,105	1,045					
				22	1,320	1,255	1,190	1,120					
				24	1,390	1,320	1,250	1,180					
				26	1,430	1,360	1,285	1,215					
				28	1,520	1,445	1,370	1,290					
				30	1,570	1,490	1,415	1,335					
				32	1,640	1,560	1,475	1,395					
<hr/>													
END OF 474371													
				40	1,870	1,775	1,685	1,590					
				42	1,930	1,835	1,735	1,640					
				44	1,980	1,880	1,780	1,685					
				46	2,040	1,940	1,835	1,735					
				48	2,090	1,985	1,880	1,775					
				50	2,150	2,045	1,935	1,830					
				54	2,200	2,090	1,980	1,870					



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
26x12.00-12NHS	474377	TL	6	30	2,250	8.0AT, 8.50-I-55,I-70,I-90, 8 1/2JA, 8.5AT, 9 1/2JA, 9.5AT, 10 1/2JA, 10.5AT, 10.50-I-55,I-70,I-90	12.2	25.8	11.3	75	12	--	--
Inflation Pressure (psi)			10 mph (lbs)	15 mph (lbs)	20 mph (lbs)	25 mph (lbs)			30 mph (lbs)				
16			1,570	1,490	1,415	1,335			1,255				
18			1,650	1,570	1,485	1,405			1,320				
20			1,760	1,670	1,585	1,495			1,410				
22			1,870	1,775	1,685	1,590			1,495				
24			1,980	1,880	1,780	1,685			1,585				
26			2,090	1,985	1,880	1,775			1,670				
28			2,150	2,045	1,935	1,830			1,720				
30			2,250	2,140	2,025	1,915			1,800				

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
27x8.50-15NHS	474356	TL	6	45	1,570	7JA	8.6	27.5	12.8	83	11	--	--
Inflation Pressure (psi)			30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)			5 mph (lbs)				
15			805	900	960	1,065			1,270				
20			965	1,080	1,150	1,275			1,525				
25			1,100	1,230	1,310	1,450			1,740				
30			1,230	1,380	1,465	1,625			1,945				
35			1,320	1,480	1,570	1,740			2,085				
40			1,430	1,600	1,700	1,890			2,260				
45			1,570	1,760	1,870	2,070			2,480				





MULTI TRAC C/S

Tire Size	Catalog #	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
27x10.50-15NHS	4743H6	TL	4	N/A	30	1,320	8LB	10.5	27.0	12.7	81	12	--	--
27x10.50-15NHS	4743E0	TL	10	108B	75	2,200	8LB	10.4	27.8	13.0	84	12	--	--
Inflation Pressure (psi)			30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)							
10			695	780	825	915	1,100							
15			880	985	1,045	1,160	1,390							
20			1,020	1,140	1,215	1,345	1,610							
25			1,170	1,310	1,390	1,545	1,850							
30			1,320	1,480	1,570	1,740	2,085							
END OF 4743H6														
45			1,650	1,850	1,965	2,180	2,605							
50			1,760	1,970	2,095	2,325	2,780							
55			1,870	2,095	2,225	2,470	2,955							
60			1,980	2,220	2,355	2,615	3,130							
65			2,040	2,285	2,430	2,695	3,225							
70			2,150	2,410	2,560	2,840	3,395							
75			2,200	2,465	2,620	2,905	3,475							

Tire Size	Catalog #	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
28x8.50-15NHS	4743R3	TL	6	45	1,870		7JA	8.3	28.0	12.8	83	11	--	--
Inflation Pressure (psi)			30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)							
15			990	1,110	1,180	1,305	1,565							
20			1,170	1,310	1,390	1,545	1,850							
25			1,360	1,525	1,620	1,795	2,150							
30			1,480	1,660	1,760	1,955	2,340							
35			1,650	1,850	1,965	2,180	2,605							
40			1,760	1,970	2,095	2,325	2,780							
45			1,870	2,095	2,225	2,470	2,955							

Tire Size	Catalog #	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
29x12.50-15NHS	4748L5	TL	8	107B	45	2,150	10LB	12.6	29.2	13.5	87	12	--	--
Inflation Pressure (psi)			30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)							
15			1,140	1,275	1,355	1,505	1,800							
20			1,320	1,480	1,570	1,740	2,085							
25			1,520	1,700	1,810	2,005	2,400							
30			1,710	1,915	2,035	2,255	2,700							
35			1,870	2,095	2,225	2,470	2,955							
40			1,980	2,220	2,355	2,615	3,130							
45			2,150	2,410	2,560	2,840	3,395							



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
31x13.50-15IMP	3U2474	TL	114B	45	2,600	10LB	13.9	30.9	14.4	93	12	--	--
Inflation Pressure (psi)			30 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)		
15			1,390		1,555		1,655		1,835		2,195		
20			1,650		1,850		1,965		2,180		2,605		
25			1,870		2,095		2,225		2,470		2,955		
30			2,090		2,340		2,485		2,760		3,300		
35			2,270		2,540		2,700		2,995		3,585		
40			2,470		2,765		2,940		3,260		3,905		
45			2,600		2,910		3,095		3,430		4,110		

Tire Size	Catalog #	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
31x13.50-15NHS	4743U2	TL	8	114B	45	2,600	10LB	13.9	30.9	14.4	93	12	--	--
31x13.50-15NHS	47LKU3	TL	12	124B	75	3,520	10LB	14.1	31.1	14.4	93	12	--	--
Inflation Pressure (psi)			30 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)			
15			1,390		1,555		1,655		1,835		2,195			
20			1,650		1,850		1,965		2,180		2,605			
25			1,870		2,095		2,225		2,470		2,955			
30			2,090		2,340		2,485		2,760		3,300			
35			2,270		2,540		2,700		2,995		3,585			
40			2,470		2,765		2,940		3,260		3,905			
45			2,600		2,910		3,095		3,430		4,110			
END OF 4743U2														
45			2,600		2,910		3,095		3,430		4,110			
50			2,760		3,090		3,285		3,645		4,360			
55			2,910		3,260		3,465		3,840		4,600			
60			3,080		3,450		3,665		4,065		4,865			
65			3,300		3,695		3,925		4,355		5,215			
70			3,420		3,830		4,070		4,515		5,405			
75			3,520		3,940		4,190		4,645		5,560			

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
33x12.50-16.5	4743J0	TL	4	30	2,340	9.75	12.7	32.7	15.0	97	12	--	--
Inflation Pressure (psi)			30 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)		
10			1,170		1,310		1,390		1,545		1,850		
15			1,480		1,660		1,760		1,955		2,340		
20			1,760		1,970		2,095		2,325		2,780		
25			2,040		2,285		2,430		2,695		3,225		
30			2,340		2,620		2,785		3,090		3,695		





MULTI TRAC C/S

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
36x13.50-15NHS	474350	TL	4	20	2,600	10LB	15.1	36.9	16.4	108	12	--	--
Inflation Pressure (psi)		30 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)			
10		1,760		1,970		2,095		2,325		2,780			
12		1,980		2,220		2,355		2,615		3,130			
14		2,150		2,410		2,560		2,840		3,395			
16		2,340		2,620		2,785		3,090		3,695			
18		2,470		2,765		2,940		3,260		3,905			
20		2,600		2,910		3,095		3,430		4,110			

Tire Size	Catalog #	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
41x14.00-20NHS	474323	TL	4	120B	25	3,080	W11, W11H	14.6	42.0	19.2	125	22	--	--
Inflation Pressure (psi)		30 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)				
10		1,820		2,040		2,165		2,400		2,875				
15		2,340		2,620		2,785		3,090		3,695				
20		2,760		3,090		3,285		3,645		4,360				
25		3,080		3,450		3,665		4,065		4,865				

Tire Size	Catalog #	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
44x18.00-20NHS	474342	TL	4	123B	20	3,420	W14L, W14LH	18.6	44.9	20.3	133	25	--	--
Inflation Pressure (psi)		30 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)				
10		2,270		2,540		2,700		2,995		3,585				
12		2,470		2,765		2,940		3,260		3,905				
14		2,760		3,090		3,285		3,645		4,360				
16		3,000		3,360		3,570		3,960		4,740				
18		3,200		3,585		3,810		4,225		5,055				
20		3,420		3,830		4,070		4,515		5,405				





TITAN SOFT-TURF HF-1

- Designed for low ground pressure use
- Ideal for fine lawn maintenance and can also be used for industrial applications
- Available in LSW



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
25x10.50LL-15	4303N8	TL	6	30	935	8LB	10.1	26.4	12.4	80	9	--	--

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
8	640	715	760	845	1,010
10	760	850	905	1,005	1,200
25	855	960	1,015	1,130	1,350
30	935	1,045	1,115	1,235	1,475

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
LSW305-521NHS	G3032K	TL	6	30	2,340	521x210LSW	12.0	33.5	14.7	98	10	--	--

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
20	1,820	2,040	2,165	2,400	2,875
25	2,090	2,340	2,485	2,760	3,300
30	2,340	2,620	2,785	3,090	3,695

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
27x12LL-15NHS	4303M7	TL	6	30	1,320	10LB	12.2	27.4	12.6	82	10	--	--

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
8	855	960	1,015	1,130	1,350
15	880	985	1,045	1,160	1,390
20	1,050	1,175	1,250	1,385	1,660
25	1,200	1,345	1,430	1,585	1,895
30	1,320	1,480	1,570	1,740	2,085

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
LSW570-648NHS	G303H4	TL	6	30	6,800	648x457LSW	23.1	45.9	20.6	135	12	--	--

See Next Page for the Load & Inflation Table





SOFT-TURF

G303H4 LOAD & INFLATION TABLE

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
6	2,830	3,170	3,370	3,735	4,470
10	3,520	3,940	4,190	4,645	5,560
15	4,540	5,085	5,405	5,995	7,175
20	5,360	6,005	6,380	7,075	8,470
25	6,000	6,720	7,140	7,920	9,480
30	6,800	7,615	8,090	8,975	10,745



TITAN LSW430 HF-1

- Designed to reduce vehicle bounce, loping and sidewall heat build up
- Features a low aspect ratio tire and a large diameter wheel



Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
LSW305R343NHS	G30573	TL	121A3	52	3,200	343x229LSW	11.9	25.8	11.2	77	8	--	--

Inflation Pressure (psi)	10 mph (lbs)	15 mph (lbs)	20 mph (lbs)	25 mph (lbs)	30 mph (lbs)
26	2,150	2,045	1,935	1,830	1,720
30	2,340	2,225	2,105	1,990	1,870
34	2,540	2,415	2,285	2,160	2,030
38	2,680	2,545	2,410	2,280	2,145
42	2,830	2,690	2,545	2,405	2,265
46	3,000	2,850	2,700	2,550	2,400
52	3,200	3,040	2,880	2,720	2,560

Tire Size	Catalog #	TL/TT	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
LSW610R470NHS	G303P0	TL	125A8	30	3,640	470x483LSW	23.7	39.5	17.7	119	12	--	--

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
15	2,470	2,765	2,940	3,260	3,905
20	2,910	3,260	3,465	3,840	4,600
25	3,300	3,695	3,925	4,355	5,215
30	3,640	4,075	4,330	4,805	5,750



TITAN FLO-TRAC LUG HF-2

- Designed for maximum flotation and durability
- Features low section height for improved handling and roadability
- Open curved lug design allows for maximum self-cleaning and side-hill slip resistance



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
31x15.50-15NHS	41G3A4	TL	8	45	2,760	13LB	15.7	32.1	14.9	98	22	--	--
Inflation Pressure (psi)	30 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)				
15	1,430		1,600		1,700		1,890		2,260				
20	1,710		1,915		2,035		2,255		2,700				
25	1,930		2,160		2,295		2,550		3,050				
30	2,150		2,410		2,560		2,840		3,395				
35	2,340		2,620		2,785		3,090		3,695				
40	2,540		2,845		3,025		3,355		4,015				
45	2,760		3,090		3,285		3,645		4,360				

Tire Size	Catalog #	TL/TT	Ply Rating	Load Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
35x19.00-16.1	41G3G3	TL	12	130B	55	4,180	W16C, W16CH	17.8	35.4	16.3	105	27	--	--
Inflation Pressure (psi)	30 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)					
25	2,600		2,910		3,095		3,430		4,110					
30	2,910		3,260		3,465		3,840		4,600					
35	3,200		3,585		3,810		4,225		5,055					
40	3,420		3,830		4,070		4,515		5,405					
45	3,640		4,075		4,330		4,805		5,750					
50	3,960		4,435		4,710		5,225		6,255					
55	4,180		4,680		4,975		5,520		6,605					

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
38x18.00-20NHS	41G3F1	TL	10	45	3,430	W14L, W14LH	17.7	40.6	18.4	121	40	--	--
38x18.00-20NHS	41G5R6	TL	16	75	4,680	W14L, W14LH	17.2	40.9	19.2	123	40	--	--

See Next Page for the Load & Inflation Table






FLO-TRAC LUG

41G3F1 & 41G5R6 LOAD & INFLATION TABLE

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
15	1,820	2,040	2,165	2,400	2,875
20	2,150	2,410	2,560	2,840	3,395
25	2,400	2,690	2,855	3,170	3,790
30	2,680	3,000	3,190	3,540	4,235
35	3,000	3,360	3,570	3,960	4,740
40	3,200	3,585	3,810	4,225	5,055
45	3,430	3,840	4,080	4,530	5,420
END OF 41G3F1					
50	3,640	4,075	4,330	4,805	5,750
55	3,860	4,325	4,595	5,095	6,100
60	4,080	4,570	4,855	5,385	6,445
65	4,300	4,815	5,115	5,675	6,795
70	4,400	4,930	5,235	5,810	6,950
75	4,680	5,240	5,570	6,180	7,395

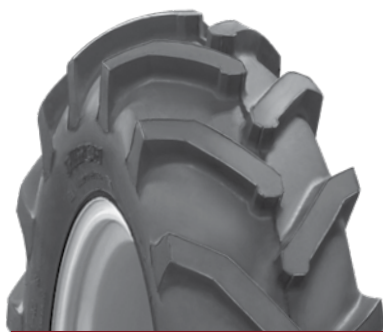

TITAN TRU POWER II HF-2

- Ultimate deep-traction tire with a large contact area to provide the best traction
- A great performer on wet or dry surfaces
- Features a specially designed rim guard to keep debris from the bead seat area



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
26x12.00-12NHS	423360	TL	8	42	2,740	8.0AT, 8.50-1-55,1-70,1-90, 8 1/2JA, 8.5AT, 9 1/2JA, 9.5AT, 10 1/2JA, 10.5AT, 10.50-1-55,1-70,1-90	11.9	26.1	11.7	76	20	--	--

Inflation Pressure (psi)	10 mph (lbs)	15 mph (lbs)	20 mph (lbs)	25 mph (lbs)	30 mph (lbs)
18	1,650	1,570	1,485	1,405	1,320
22	1,870	1,775	1,685	1,590	1,495
26	2,090	1,985	1,880	1,775	1,670
30	2,270	2,155	2,045	1,930	1,815
34	2,400	2,280	2,160	2,040	1,920
38	2,600	2,470	2,340	2,210	2,080
42	2,740	2,605	2,465	2,330	2,190





TITAN CONTRACTOR FWD SS

- Excellent traction and wear are the benefits of the broad, curved lugs
- High strength construction gives it exceptional durability



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
12-16.5NHS	46C3E6	TL	6	40	4,220	9.75	11.7	33.2	14.8	97	23	--	--
Inflation Pressure (psi)		5 mph (lbs)		10 mph (lbs)		20 mph (lbs)		25 mph (lbs)		30 mph (lbs)			
20		2,830		2,235		1,925		1,870		1,785			
25		3,200		2,530		2,175		2,090		2,015			
30		3,520		2,780		2,395		2,340		2,220			
35		3,860		3,050		2,625		2,540		2,430			
40		4,220		3,335		2,870		2,760		2,660			

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
14-17.5NHS	46C3G9	TL	10	55	6,850	10.50	13.6	37.6	16.6	109	24	--	--
Inflation Pressure (psi)		5 mph (lbs)		10 mph (lbs)		20 mph (lbs)		25 mph (lbs)		30 mph (lbs)			
20		3,740		2,955		2,545		2,470		2,355			
25		4,300		3,395		2,925		2,830		2,710			
30		4,800		3,790		3,265		3,200		3,025			
35		5,200		4,110		3,535		3,420		3,275			
40		5,680		4,485		3,860		3,740		3,580			
45		6,150		4,860		4,180		4,080		3,875			
50		6,400		5,055		4,350		4,180		4,030			
55		6,850		5,410		4,660		4,540		4,315			

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
15-19.5NHS	46C3H9	TL	8	40	7,250	11.75, 12.25	15.5	40.7	17.8	118	26	--	--
Inflation Pressure (psi)		5 mph (lbs)		10 mph (lbs)		20 mph (lbs)		25 mph (lbs)		30 mph (lbs)			
20		4,800		3,790		3,265		3,200		3,025			
25		5,520		4,360		3,755		3,640		3,480			
30		6,150		4,860		4,180		4,080		3,875			
35		6,800		5,370		4,625		4,540		4,285			
40		7,250		5,730		4,930		4,800		4,570			





TITAN HD 2000 SS

- Engineered with HD sidewalls to protect against abrasions, tears and punctures
- Improved dual tapered step lug for wear and extended life



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
10-16.5NHS	4393D1	TL	8	60	4,140	8.25	10.7	30.9	14.1	92	21	--	--
Inflation Pressure (psi)				5 mph (lbs)	10 mph (lbs)	20 mph (lbs)	25 mph (lbs)		30 mph (lbs)				
25				2,470	1,950	1,680	1,630		1,555				
30				2,760	2,180	1,875	1,820		1,740				
35				3,000	2,370	2,040	1,980		1,890				
40				3,300	2,605	2,245	2,180		2,080				
45				3,520	2,780	2,395	2,325		2,220				
50				3,740	2,955	2,545	2,470		2,355				
55				3,960	3,130	2,695	2,615		2,495				
60				4,140	3,270	2,815	2,730		2,610				

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
12-16.5NHS	4393C9	TL	6	40	4,220	9.75	12.5	32.7	15.0	97	23	--	--
12-16.5NHS	4393J7	TL	10	65	5,600	9.75	12.9	32.4	14.9	97	23	--	--
Inflation Pressure (psi)				5 mph (lbs)	10 mph (lbs)	20 mph (lbs)	25 mph (lbs)		30 mph (lbs)				
10				1,870	1,475	1,270	1,235		1,180				
15				2,400	1,895	1,630	1,585		1,510				
20				2,830	2,235	1,925	1,870		1,785				
25				3,200	2,530	2,175	2,110		2,015				
30				3,520	2,780	2,395	2,325		2,220				
35				3,860	3,050	2,625	2,550		2,430				
40				4,220	3,335	2,870	2,785		2,660				
END OF 4393C9													
45				4,540	3,585	3,085	2,995		2,860				
50				4,800	3,790	3,265	3,170		3,025				
55				5,080	4,015	3,455	3,355		3,200				
60				5,360	4,235	3,645	3,540		3,375				
65				5,600	4,425	3,810	3,695		3,530				

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
14-17.5NHS	439396	TL	10	55	6,850	10.50	14.1	36.5	16.4	107	24	--	--
14-17.5NHS	439384	TL	14	80	8,540	10.50	14.5	36.3	16.5	108	24	--	--

See Next Page for the Load & Inflation Table



439396 & 439384 LOAD & INFLATION TABLE

Inflation Pressure (psi)	5 mph (lbs)	10 mph (lbs)	20 mph (lbs)	25 mph (lbs)	30 mph (lbs)
20	3,740	2,955	2,545	2,470	2,355
25	4,300	3,395	2,925	2,840	2,710
30	4,800	3,790	3,265	3,170	3,025
35	5,200	4,110	3,535	3,430	3,275
40	5,680	4,485	3,860	3,750	3,580
45	6,150	4,860	4,180	4,060	3,875
50	6,400	5,055	4,350	4,225	4,030
55	6,850	5,410	4,660	4,520	4,315
END OF 439396					
60	7,150	5,650	4,860	4,720	4,505
65	7,600	6,005	5,170	5,015	4,790
70	7,850	6,200	5,340	5,180	4,945
75	8,250	6,520	5,610	5,445	5,200
80	8,540	6,745	5,805	5,635	5,380

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
15-19.5NHS	439336	TL	12	60	9,190	11.75, 12.25	15.8	40.0	18.0	118	25	--	--

Inflation Pressure (psi)	5 mph (lbs)	10 mph (lbs)	20 mph (lbs)	25 mph (lbs)	30 mph (lbs)
25	5,520	4,360	3,755	3,645	3,480
30	6,150	4,860	4,180	4,060	3,875
35	6,800	5,370	4,625	4,490	4,285
40	7,150	5,650	4,860	4,720	4,505
45	7,850	6,200	5,340	5,180	4,945
50	8,250	6,520	5,610	5,445	5,200
55	8,800	6,950	5,985	5,810	5,545
60	9,190	7,260	6,250	6,065	5,790

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
23x8.50-12NHS	4393G8	TL	6	50	1,810	6.0AT, 6.5AT, 7.00-1-55, 1-70, 1-90, 7JA, 7.0AT	8.5	23.8	N/A	N/A	14	--	--

Inflation Pressure (psi)	5 mph (lbs)	10 mph (lbs)	20 mph (lbs)	25 mph (lbs)	30 mph (lbs)
20	1,050	830	715	695	660
25	1,200	950	815	790	755
30	1,360	1,075	925	900	855
35	1,480	1,170	1,005	975	930
40	1,570	1,240	1,070	1,035	990
45	1,710	1,350	1,165	1,130	1,075
50	1,810	1,430	1,230	1,195	1,140

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
27x8.50-15NHS	439377	TL	8	60	2,890	7JA	8.7	26.1	12.2	79	15	--	--

See Next Page for the Load & Inflation Table



439377 LOAD & INFLATION TABLE

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
20	965	1,080	1,150	1,275	1,525
25	1,100	1,230	1,310	1,450	1,740
30	1,230	1,380	1,465	1,625	1,945
40	1,430	1,600	1,700	1,890	2,260
45	1,570	1,760	1,870	2,070	2,480
50	1,650	1,850	1,965	2,180	2,605
55	1,760	1,970	2,095	2,325	2,780
60	1,830	2,050	2,180	2,415	2,890

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
27x10.50-15NHS	439378	TL	8	60	3,100	8LB	10.7	27.4	N/A	N/A	15	--	--

Inflation Pressure (psi)	30 mph (lbs)	20 mph (lbs)	15 mph (lbs)	10 mph (lbs)	5 mph (lbs)
20	1,020	1,140	1,215	1,345	1,610
25	1,170	1,310	1,390	1,545	1,850
30	1,320	1,480	1,570	1,740	2,085
40	1,520	1,700	1,810	2,005	2,400
45	1,650	1,850	1,965	2,180	2,605
50	1,760	1,970	2,095	2,325	2,780
55	1,870	2,095	2,225	2,470	2,955
60	1,980	2,220	2,355	2,615	3,100





TITAN HD 2000 II SS

- Titan's premium conventional skid steer tire with deeper tread depth, premium compound, larger tread lugs, heavier sidewall and larger rim guard




Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
10-16.5NHS	49E3D1	TL	8	60	4,140	8.25	11.0	30.4	13.9	90	24	--	--
Inflation Pressure (psi)		5 mph (lbs)		10 mph (lbs)		20 mph (lbs)		25 mph (lbs)		30 mph (lbs)			
25		2,470		1,950		1,680		1,630		1,555			
30		2,760		2,180		1,875		1,820		1,740			
35		3,000		2,370		2,040		1,980		1,890			
40		3,300		2,605		2,245		2,180		2,080			
45		3,520		2,780		2,395		2,325		2,220			
50		3,740		2,955		2,545		2,470		2,355			
55		3,960		3,130		2,695		2,615		2,495			
60		4,140		3,270		2,815		2,730		2,610			

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
12-16.5NHS	49E3J7	TL	10	65	5,600	9.75	13.0	32.7	15.0	98	26	--	--
Inflation Pressure (psi)		5 mph (lbs)		10 mph (lbs)		20 mph (lbs)		25 mph (lbs)		30 mph (lbs)			
30		3,520		2,780		2,395		2,325		2,220			
35		3,860		3,050		2,625		2,550		2,430			
40		4,180		3,300		2,840		2,760		2,635			
45		4,540		3,585		3,085		2,995		2,860			
50		4,800		3,790		3,265		3,170		3,025			
55		5,080		4,015		3,455		3,355		3,200			
60		5,360		4,235		3,645		3,540		3,375			
65		5,600		4,425		3,810		3,695		3,530			

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
14-17.5NHS	49E384	TL	14	80	8,540	10.50	15.2	35.8	16.2	106	26	--	--
Inflation Pressure (psi)		5 mph (lbs)		10 mph (lbs)		20 mph (lbs)		25 mph (lbs)		30 mph (lbs)			
45		6,150		4,860		4,180		4,060		3,875			
50		6,400		5,055		4,350		4,225		4,030			
55		6,800		5,370		4,625		4,490		4,285			
60		7,150		5,650		4,860		4,720		4,505			
65		7,600		6,005		5,170		5,015		4,790			
70		7,850		6,200		5,340		5,180		4,945			
75		8,250		6,520		5,610		5,445		5,200			
80		8,540		6,745		5,805		5,635		5,380			





Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
20x8.00-10NHS	49E3W8	TL	4	40	1,210	6.00-1-55, 1-70, 1-90, 6JA, 7.00-1-55, 1-70, 1-90, 7JA	8.0	19.4	9.0	58	15	--	--
Inflation Pressure (psi)		5 mph (lbs)		10 mph (lbs)		20 mph (lbs)		25 mph (lbs)		30 mph (lbs)			
10		535		425		365		355		335			
15		675		535		460		445		425			
20		805		635		545		530		505			
25		935		740		635		615		590			
30		1,020		805		695		675		645			
35		1,140		900		775		750		720			
40		1,210		955		825		800		760			

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
31x15.50-16.5	49E3L8	TL	8	40	4,850	12.00	14.8	30.5	13.6	89	24	--	--
Inflation Pressure (psi)		5 mph (lbs)		10 mph (lbs)		20 mph (lbs)		25 mph (lbs)		30 mph (lbs)			
10		2,150		1,700		1,460		1,420		1,355			
15		2,760		2,180		1,875		1,820		1,740			
20		3,200		2,530		2,175		2,110		2,015			
25		3,640		2,875		2,475		2,400		2,295			
30		4,080		3,225		2,775		2,695		2,570			
35		4,540		3,585		3,085		2,995		2,860			
40		4,850		3,830		3,300		3,200		3,055			

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
33x15.50-16.5	49E3R9	TL	14	70	7,480	12.00	15.1	33.2	14.9	98	26	--	--
Inflation Pressure (psi)		5 mph (lbs)		10 mph (lbs)		20 mph (lbs)		25 mph (lbs)		30 mph (lbs)			
35		4,940		3,905		3,360		3,260		3,110			
40		5,360		4,235		3,645		3,540		3,375			
45		5,840		4,615		3,970		3,855		3,680			
50		6,150		4,860		4,180		4,060		3,875			
55		6,400		5,055		4,350		4,225		4,030			
60		6,800		5,370		4,625		4,490		4,285			
65		7,150		5,650		4,860		4,720		4,505			
70		7,480		5,910		5,085		4,935		4,710			



TITAN TRAC LOADER CHEVRON SS

- Features chevron tread pattern with nylon fabric construction
- Intended for skid steer use



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
7.00-15SS	4123C5	TL	6	60	3,180	5.50F, 6LB	8.0	30.2	13.5	88	17	--	--
Inflation Pressure (psi)				5 mph (lbs)	10 mph (lbs)	20 mph (lbs)	25 mph (lbs)		30 mph (lbs)				
20				1,650	1,305	1,120	1,090		1,040				
25				1,930	1,525	1,310	1,275		1,215				
30				2,150	1,700	1,460	1,420		1,355				
35				2,340	1,850	1,590	1,545		1,475				
40				2,540	2,005	1,725	1,675		1,600				
45				2,680	2,115	1,820	1,770		1,690				
50				2,830	2,235	1,925	1,870		1,785				
55				3,000	2,370	2,040	1,980		1,890				
60				3,180	2,510	2,160	2,100		2,005				



TITAN TRAC LOADER SS

- The tire preferred by major manufacturers of unloaders and skid steer equipment
- Center lug design adds extra traction



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
10-16.5NHS	4123C8	TL	6	45	3,500	8.25	10.9	30.9	13.9	91	19	--	--
Inflation Pressure (psi)				5 mph (lbs)	10 mph (lbs)	20 mph (lbs)	25 mph (lbs)		30 mph (lbs)				
20				2,200	1,740	1,495	1,450		1,385				
25				2,470	1,950	1,680	1,630		1,555				
30				2,760	2,180	1,875	1,820		1,740				
35				3,000	2,370	2,040	1,980		1,890				
40				3,300	2,605	2,245	2,180		2,080				
45				3,500	2,765	2,380	2,310		2,205				





Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
12-16.5NHS	4123C9	TL	6	40	4,220	9.75	11.9	33.5	15.1	99	22	--	--
Inflation Pressure (psi)			5 mph (lbs)		10 mph (lbs)		20 mph (lbs)		25 mph (lbs)		30 mph (lbs)		
20			2,830		2,235		1,925		1,870		1,785		
25			3,200		2,530		2,175		2,110		2,015		
30			3,520		2,780		2,395		2,325		2,220		
35			3,860		3,050		2,625		2,550		2,430		
40			4,220		3,335		2,870		2,785		2,660		

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
14-17.5NHS	412396	TL	10	55	6,850	10.50	13.9	36.8	16.7	109	23	--	--
Inflation Pressure (psi)			5 mph (lbs)		10 mph (lbs)		20 mph (lbs)		25 mph (lbs)		30 mph (lbs)		
20			3,740		2,955		2,545		2,470		2,355		
25			4,300		3,395		2,925		2,840		2,710		
30			4,820		3,810		3,280		3,180		3,035		
35			5,200		4,110		3,535		3,430		3,275		
40			5,680		4,485		3,860		3,750		3,580		
45			6,150		4,860		4,180		4,060		3,875		
50			6,400		5,055		4,350		4,180		4,030		
55			6,850		5,410		4,660		4,540		4,315		

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
15-19.5NHS	412373	TL	6	30	6,130	11.75, 12.25	15.4	40.1	17.6	116	25	--	--
Inflation Pressure (psi)			5 mph (lbs)		10 mph (lbs)		20 mph (lbs)		25 mph (lbs)		30 mph (lbs)		
20			4,800		3,790		3,265		3,170		3,025		
25			5,520		4,360		3,755		3,645		3,480		
30			6,130		4,845		4,170		4,045		3,860		

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
18x8.50-10NHS	4123U1	TL	4	22	830	6.00-1-55, 1-70, 1-90, 6JA, 7.00-1-55, 1-70, 1-90, 7JA	7.1	18.3	8.5	55	13	--	--
Inflation Pressure (psi)			5 mph (lbs)		10 mph (lbs)		20 mph (lbs)		25 mph (lbs)		30 mph (lbs)		
10			520		410		355		345		330		
12			585		460		400		385		370		
14			640		505		435		420		405		
16			695		550		475		460		440		
18			740		585		505		490		465		
20			785		620		535		520		495		
22			830		655		565		550		525		



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
23x8.50-12NHS	4123C3	TL	4	35	1,470	6.0AT, 6.5AT, 7.00-I-55, I-70, I-90, 7JA, 7.0AT	8.3	23.1	10.7	69	14	--	--
Inflation Pressure (psi)			5 mph (lbs)		10 mph (lbs)		20 mph (lbs)		25 mph (lbs)		30 mph (lbs)		
10			715		565		485		470		450		
15			880		695		600		580		555		
20			1,050		830		715		695		660		
25			1,200		950		815		790		755		
30			1,360		1,075		925		900		855		
35			1,470		1,160		1,000		970		925		

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
23x8.50-14NHS	412388	TL	4	35	1,490	6.0AT, 6.5AT, 7.00-I-55, I-70, I-90, 7KB, 7.0AT	7.8	23.6	10.8	70	17	--	--
Inflation Pressure (psi)			5 mph (lbs)		10 mph (lbs)		20 mph (lbs)		25 mph (lbs)		30 mph (lbs)		
10			715		565		485		470		450		
15			910		720		620		600		575		
20			1,070		845		730		705		675		
25			1,230		970		835		810		775		
30			1,360		1,075		925		900		855		
35			1,490		1,175		1,015		985		940		

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
25x8.50-14NHS	412379	TL	6	50	2,130	6.0AT, 6.5AT, 7.00-I-55, I-70, I-90, 7KB, 7.0AT	8.5	25.9	11.9	77	17	--	--
Inflation Pressure (psi)			5 mph (lbs)		10 mph (lbs)		20 mph (lbs)		25 mph (lbs)		30 mph (lbs)		
10			825		650		560		545		520		
20			1,230		970		835		810		775		
25			1,430		1,130		970		945		900		
30			1,570		1,240		1,070		1,035		990		
35			1,710		1,350		1,165		1,130		1,075		
40			1,870		1,475		1,270		1,235		1,180		
45			1,980		1,565		1,345		1,305		1,245		
50			2,130		1,685		1,450		1,405		1,340		

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
26x12.00-12NHS	412361	TL	4	20	1,780	8.0AT, 8.50-I-55, I-70, I-90, 8 1/2JA, 8.5AT, 9 1/2JA, 9.5AT, 10 1/2JA, 10.5AT, 10.50-I-55, I-70, I-90	12.0	26.2	11.6	76	15	--	--
Inflation Pressure (psi)			5 mph (lbs)		10 mph (lbs)		20 mph (lbs)		25 mph (lbs)		30 mph (lbs)		
10			1,200		950		815		790		755		
15			1,520		1,200		1,035		1,005		960		
20			1,780		1,405		1,210		1,175		1,120		





Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
27x8.50-15NHS	412339	TL	6	45	2,480	7JA	8.5	27.0	12.3	80	15	--	--
Inflation Pressure (psi)			30 mph (lbs)		20 mph (lbs)				10 mph (lbs)				5 mph (lbs)
10			640		715				845				1,010
15			805		900				1,065				1,270
20			965		1,080				1,275				1,525
25			1,100		1,230				1,450				1,740
30			1,230		1,380				1,625				1,945
35			1,320		1,480				1,740				2,085
40			1,430		1,600				1,890				2,260
45			1,570		1,760				2,070				2,480

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
27x10.50-15NHS	4123H7	TL	6	45	2,610	8LB	10.0	27.6	12.6	82	14	--	--
Inflation Pressure (psi)			30 mph (lbs)		20 mph (lbs)				10 mph (lbs)				5 mph (lbs)
10			695		780				915				1,100
15			880		985				1,160				1,390
20			1,020		1,140				1,345				1,610
25			1,170		1,310				1,545				1,850
30			1,320		1,480				1,740				2,085
35			1,430		1,600				1,890				2,260
40			1,520		1,700				2,005				2,400
45			1,650		1,850				2,180				2,610

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI	
27x12.50-15NHS	4122N7	TL	4	25	2,340	10LB	11.2	28.2	12.6	82	14	--	--	
Inflation Pressure (psi)			5 mph (lbs)		10 mph (lbs)				20 mph (lbs)				25 mph (lbs)	30 mph (lbs)
10			1,390		1,100				945				915	875
15			1,760		1,390				1,195				1,160	1,110
20			2,090		1,650				1,420				1,380	1,315
25			2,340		1,850				1,590				1,545	1,475

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
28x8.50-15NHS	4123R3	TL	6	45	2,880	7JA	8.2	28.1	12.5	82	15	--	--
Inflation Pressure (psi)			30 mph (lbs)		20 mph (lbs)				10 mph (lbs)				5 mph (lbs)
10			760		850				1,005				1,200
15			965		1,080				1,275				1,525
20			1,140		1,275				1,505				1,800
25			1,280		1,435				1,690				2,020
30			1,430		1,600				1,890				2,260
35			1,570		1,760				2,070				2,480
40			1,710		1,915				2,255				2,700
45			1,820		2,040				2,400				2,880



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
43x16.00-20NHS	4123A5	TL	4	20	4,540	W14L, W14LH	15.9	43.9	19.6	128	26	--	--
Inflation Pressure (psi)		30 mph (lbs)		20 mph (lbs)		15 mph (lbs)		10 mph (lbs)		5 mph (lbs)			
10		1,930		2,160		2,295		2,550		3,050			
15		2,470		2,765		2,940		3,260		3,905			
20		2,910		3,260		3,465		3,840		4,540			



TITAN TGS2 SS

- All season tread pattern
- Aggressive tread pattern and siping provides excellent traction on all surfaces and conditions, especially snow, ice and mud



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
12-16.5NHS	4523J7	TL	10	65	5,600	9.75	13.3	33.0	N/A	N/A	20	--	--
Inflation Pressure (psi)		5 mph (lbs)		10 mph (lbs)		20 mph (lbs)		25 mph (lbs)		30 mph (lbs)			
20		2,830		2,235		1,925		1,870		1,785			
30		3,520		2,780		2,395		2,325		2,220			
35		3,860		3,050		2,625		2,550		2,430			
45		4,540		3,585		3,085		2,995		2,860			
50		4,800		3,790		3,265		3,170		3,025			
55		5,080		4,015		3,455		3,355		3,200			
65		5,600		4,425		3,810		3,695		3,530			



TITAN LSW G9A SS

- Premium LSW skid steer tire with all the features of the HD 2000 II, plus run-flat capability
- LSW assemblies reduce bounce and lope, and improve lateral stability



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
LSW305-546NHS	G9A3M1	TL	10	65	5,600	546x248LSW	11.9	32.8	15.0	97	24	--	--
Inflation Pressure (psi)		5 mph (lbs)		10 mph (lbs)		20 mph (lbs)		25 mph (lbs)		30 mph (lbs)			
30		3,565		2,815		2,425		2,355		2,245			
35		3,900		3,080		2,650		2,575		2,455			
40		4,215		3,330		2,865		2,780		2,655			
45		4,515		3,565		3,070		2,980		2,845			
50		4,805		3,795		3,265		3,170		3,025			
55		5,080		4,015		3,455		3,355		3,200			
60		5,345		4,225		3,635		3,530		3,365			
65		5,600		4,425		3,810		3,695		3,530			





TITAN ULTIMATE SS

- Extra-long life with up to twice the tread depth of conventional skid steer tires
- Superior damage resistance due to extra heavy sidewall and large rim guard
- Superior traction from high void-to-lug ratio
- Lowest possible cost per hour delivered by specialty compound and industry leading tread depth



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
10-16.5NHS	49U3D1	TL	8	60	4,140	8.25	10.7	30.1	13.8	89	42	--	--
Inflation Pressure (psi)				5 mph (lbs)	10 mph (lbs)	20 mph (lbs)			25 mph (lbs)				
25				2,470	1,950	1,680			1,630				
30				2,760	2,180	1,875			1,820				
35				3,000	2,370	2,040			1,980				
40				3,300	2,605	2,245			2,180				
45				3,520	2,780	2,395			2,325				
50				3,740	2,955	2,545			2,470				
55				3,960	3,130	2,695			2,615				
60				4,140	3,270	2,815			2,730				

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
12-16.5NHS	49U3J7	TL	10	65	5,600	9.75	12.2	33.0	15.2	98	44	--	--
Inflation Pressure (psi)				5 mph (lbs)	10 mph (lbs)	20 mph (lbs)			25 mph (lbs)				
30				3,520	2,780	2,395			2,325				
35				3,860	3,050	2,625			2,550				
40				4,180	3,300	2,840			2,760				
45				4,540	3,585	3,085			2,995				
50				4,800	3,790	3,265			3,170				
55				5,080	4,015	3,455			3,355				
60				5,360	4,235	3,645			3,540				
65				5,600	4,425	3,810			3,695				

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
14-17.5NHS	49U384	TL	14	80	8,540	10.50	14.6	35.4	16.1	105	42	--	--
Inflation Pressure (psi)				5 mph (lbs)	10 mph (lbs)	20 mph (lbs)			25 mph (lbs)				
45				6,150	4,860	4,180			4,060				
50				6,400	5,055	4,350			4,225				
55				6,800	5,370	4,625			4,490				
60				7,150	5,650	4,860			4,720				
65				7,600	6,005	5,170			5,015				
70				7,850	6,200	5,340			5,180				
75				8,250	6,520	5,610			5,445				
80				8,540	6,745	5,805			5,635				



TITAN SOFT-TURF SS

- Designed for low ground pressure use
- Ideal for fine lawn maintenance and can also be used for industrial applications
- Less aggressive to minimize turf damage



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
12-16.5NHS	4303J7	TL	10	65	5,600	9.75	14.2	32.9	14.7	96	10	--	--
Inflation Pressure (psi)	5 mph (lbs)		10 mph (lbs)		20 mph (lbs)		25 mph (lbs)		30 mph (lbs)				
20	2,830		2,235		1,925		1,870		1,785				
30	3,520		2,780		2,395		2,325		2,220				
35	3,860		3,050		2,625		2,550		2,430				
45	4,540		3,585		3,085		2,995		2,860				
50	4,800		3,790		3,265		3,170		3,025				
55	5,080		4,015		3,455		3,355		3,200				
65	5,600		4,425		3,810		3,695		3,530				

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
14-17.5NHS	430396	TL	10	55	6,850	10.50	15.1	36.4	16.8	109	10	--	--
Inflation Pressure (psi)	5 mph (lbs)		10 mph (lbs)		20 mph (lbs)		25 mph (lbs)		30 mph (lbs)				
20	3,740		2,955		2,545		2,470		2,355				
25	4,300		3,395		2,925		2,840		2,710				
30	4,800		3,790		3,265		3,170		3,025				
35	5,200		4,110		3,535		3,430		3,275				
40	5,680		4,485		3,860		3,750		3,580				
45	6,150		4,860		4,180		4,060		3,875				
50	6,400		5,055		4,350		4,225		4,030				
55	6,850		5,410		4,660		4,520		4,315				





TITAN H/E SS

- Titan's premium deep tread skid steer tire, designed for use in severe applications such as concrete, asphalt, demolition areas, quarries, glass plants, and scrap yards



Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
10-16.5NHS	43H3R8	TL	10	75	4,710	8.25	10.6	30.7	14.1	91	44	--	--
Inflation Pressure (psi)		5 mph (lbs)		10 mph (lbs)		20 mph (lbs)		25 mph (lbs)		30 mph (lbs)			
40		3,300		2,605		2,245		2,180		2,080			
45		3,520		2,780		2,395		2,325		2,220			
50		3,740		2,955		2,545		2,470		2,355			
55		3,960		3,130		2,695		2,615		2,495			
60		4,180		3,300		2,840		2,760		2,635			
65		4,300		3,395		2,925		2,840		2,710			
70		4,540		3,585		3,085		2,995		2,860			
75		4,710		3,720		3,205		3,110		2,965			

Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
12-16.5NHS	43H34R	TL	14	90	6,780	9.75	12.5	33.3	15.6	100	44	--	--
Inflation Pressure (psi)		5 mph (lbs)		10 mph (lbs)		20 mph (lbs)		25 mph (lbs)		30 mph (lbs)			
55		5,080		4,015		3,455		3,355		3,200			
60		5,360		4,235		3,645		3,540		3,375			
65		5,680		4,485		3,860		3,750		3,580			
70		5,840		4,615		3,970		3,855		3,680			
75		6,150		4,860		4,180		4,060		3,875			
80		6,400		5,055		4,350		4,225		4,030			
85		6,600		5,215		4,490		4,355		4,160			
90		6,780		5,355		4,610		4,475		4,270			


Tire Size	Catalog #	TL/TT	Ply Rating	Inflation Pressure (psi)	Rated Load (lbs)	Approved Rim	Overall Width (in)	Outside Diameter (in)	Static Loaded Radius (in)	Rolling Circ. (in)	Tread Depth (32 nd in)	RCI	SRI
14-17.5NHS	43H384	TL	14	80	8,540	10.50	13.7	35.9	16.0	105	47	--	--
Inflation Pressure (psi)		5 mph (lbs)		10 mph (lbs)		20 mph (lbs)		25 mph (lbs)		30 mph (lbs)			
45		6,150		4,860		4,180		4,060		3,875			
50		6,400		5,055		4,350		4,225		4,030			
55		6,800		5,370		4,625		4,490		4,285			
60		7,150		5,650		4,860		4,720		4,505			
65		7,600		6,005		5,170		5,015		4,790			
70		7,850		6,200		5,340		5,180		4,945			
75		8,250		6,520		5,610		5,445		5,200			
80		8,540		6,745		5,805		5,635		5,380			

IMPORTANT SAFETY INFORMATION

⚠ WARNING

To prevent **SERIOUS INJURY** or **DEATH**:

- **ONLY** specially trained personnel, using the proper procedures and tools, shall service tires.
- **ALWAYS** read and fully understand all procedures before tire/wheel servicing.
- **ALWAYS STAND CLEAR** of trajectory zone.
- **ONLY** assemble a tire and rim after you have positively identified and correctly matched the tire and rim diameter
- **ALWAYS** use a tire cage or other approved restraining devices when inflating tires.
- **NEVER** exceed the recommended inflation pressure on the sidewall of the tire you are inflating.

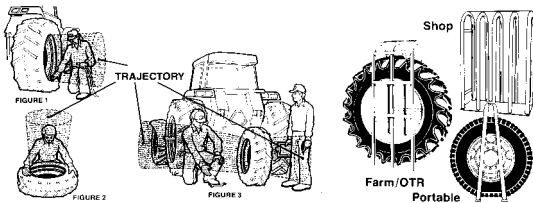

Your employer is responsible for providing proper procedures and training for tire technicians. See Occupational Safety and Health Administration (OSHA), 29 CFR 1910.177, Servicing of Single Piece and Multi-Piece Rim Wheels.

Additional information go to www.titan-intl.com or call 1 (800) 872-2327

1. Personal Protective Equipment

ALWAYS wear adequate protective eyewear (or face shield), protective footwear, and ear protection.




2. For all tires

- ALWAYS follow the blocking, jacking, or cribbing of the vehicle/equipment guidance provided by the vehicle/equipment manufacturer.
- ONLY use properly diluted tire lubricant (nonflammable vegetable or soap-based). NEVER use concentrated tire lubricant or it may not completely evaporate and residue could cause tire to slip. NEVER use petroleum based lubricants, silicone or antifreeze.
- NEVER use starter fluid, ether, gasoline, or other flammable materials and/or accelerants to lubricate the beads of a tire or there may be an explosive separation of the tire/wheel during servicing or during use.
- NEVER inflate over the maximum psi as indicated on each tire or the manufacturer's guidance.
- When seating tire beads, NEVER exceed the maximum psi for the tire or 40 psi for any multi-piece rim or 35 psi for single piece rim.
- NEVER stand, lean, or reach over the tire rim/wheel assembly in the tire cage or other approved restraining devices during inflation.

3. Single Piece Rims (Drop Center Rims)

3.1 Terminology

1. Rim Size (Nominal Bead Seat Diameter)
2. Rim Width
3. Rim Inside Dia.
4. Bead Seat Area
5. Flange
6. Flange Height
7. Valve Hole (Location and size can vary)

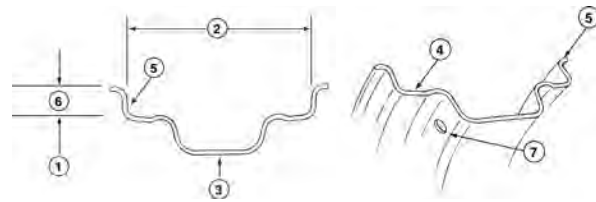

3. Single Piece Rims (Drop Center Rims)

3.2 Demounting

Tools Required

Cap and core removal tools, hydraulic bead unseating tool, two tire irons (36" if ON vehicle or 18" if OFF vehicle), wire and diluted tire lubricant.

1.	Remove any fluid fill from tire.
2.	Always remove the valve core and exhaust all air. Use exhaust muffler if applicable. Check valve stem not plugged by inserting a wire through the valve stem. For tube type tires, remove the rim nut and push valve through valve hole. NOTE: ALWAYS deflate both tires, if ON vehicle AND vehicle has a dual tire assembly.
3.	Use hydraulic bead unseating tool between the tire bead and rim flange and force the bead off the bead seat. If ON vehicle: Unseat bead on both sides of rim. If OFF vehicle: Lay tire and rim down with the narrow ledge of the rim closer to the floor and unseat bead. Then turn tire and rim over with narrow ledge (or short side of rim) up and unseat bead.
4.	Lubricate the tire bead area and rim flange with diluted tire mounting lubricant.
5.	If ON vehicle: Lock the wheel with the valve at the top. At the bottom, force the outside bead into the well. At the top, insert both 36" tire irons under the bead and pry the bead over the rim flange. If OFF vehicle: Force the part of the bead that is directly across from the valve into the well. Starting at the valve, insert both 18" tire irons under the bead and pry the bead over the rim flange.

CONTINUES ON NEXT PAGE

6. After the first section of the bead is over the rim flange, use one tire iron to pry the next section over the flange. Continue prying tire over rim flange until the entire tire bead is on the outside of the rim flange.
NOTE: DO NOT attempt to pry too large a section of the bead over the rim flange at one time. Leave one tool in position and place the second about five (5) inches away. Repeat in successive steps until the tire bead is completely unseated. Avoid extremely hard prying, which will damage the tire bead.
7. For tube-type tires, pull the tube out of the casing, starting at the bottom.
If OFF vehicle: bring tire and rim upright position before pulling tube out of the tire.

If only the tube requires repair or replacement, the tube can be removed, repaired, and replaced in the tire without removing the tire completely from the wheel. Before reinstalling the tube, thoroughly inspect the inside of the tire for damage or other foreign material. Remove any remaining fluid from inside the tire.
8. To completely remove the tire from the rim:

If ON vehicle:
Insert tire irons under the inside bead at the side of the tire. Pry the inside bead over the rim flange. Before starting, check the bead area on the opposite side of the tire is down in the well of the rim.
- If OFF vehicle:**
Turn assembly over so the narrow ledge is closer to the ground and lubricate the second tire bead and rim flange. Before starting, check the bead area on the opposite side of the tire is down in the well of the rim and insert the tire irons under the opposite side of the bead.

3.3 Mounting

WARNING


To prevent **SERIOUS INJURY** or **DEATH**:

- **ALWAYS** check the tire matches the rim diameter designation. **NEVER** mount a tire that is too large or too small for the rim. Rims of different diameters and tapers **CANNOT** be interchanged.
- **ALWAYS** remove water and foreign material from tire.
- **INSPECT** rim for damage, pitting from corrosion, cracks or if bent out of shape. If damage is found, **DO NOT** use. Mark or tag as unserviceable and remove from service area.
- **INSPECT** tubes and tires for excessive wear, cracks, tears, punctures, blisters, or other damage. **DO NOT** use if damage is found. Replace with good tube or tire.

Tools Required

Two tire irons (36" if ON vehicle or 18" if OFF vehicle), diluted tire lubricant, wire brush, locking pliers, rubber mallet, valve retrieval tool (tube-type tires), extension hose with in-line gauge and clip-on air chuck, air/water inflation gauge, tire cage or other approved restraining devices.


1. Use a wire brush to clean and inspect rim for fatigue cracks.

 **If damage is found, DO NOT use. Mark or tag as unserviceable and remove from service area. Replace any cracked, badly worn, damaged and severely rusted rims or wheels. Do not attempt to rework, weld, heat, or braze any rim base or wheel components under any circumstances.**

Coat the rim with paint or a rust inhibitor if necessary. Follow procedures and safety precautions of the paint manufacturer.
2. Thoroughly lubricate both tire beads and rim flanges with diluted tire mounting lubricant.

3. **If ON vehicle:**
Before placing tire on rim, check valve hole is at the bottom of wheel. Check directional tread tires are mounted for correct rotation direction. To put the tire on the wheel, place the inner bead over the flange at the top. Check bead is not "hung up" on bead seat; instead the bead is in the rim well, while the tire irons and/or rubber mallet are used to work the first bead over the rim.
- If OFF vehicle:**
Lay the rim on the floor with the narrow ledge on the top. Check directional tread tires are mounted for correct rotation direction. Push the bottom bead over the rim flange as far as possible. Use 18" tire irons to work the first tire bead completely over the rim flange, taking small bites and being careful not to damage the bead.
4. For tubeless tires, skip to step 7. For tube type tires:

If ON vehicle:
With the first bead on the rim, pull the tire toward the outside of the rim as far as possible to make room for the tube. Be sure valve is at the bottom of the wheel. Align the stem with the valve hole and starting at the bottom, insert tube into tire. Place the valve in valve hole and screw the rim nut in place. The tube should be partially inflated and areas contacting the rim should be re-lubricated to prevent localized stretching. Check tube is inside rim before proceeding.
- If OFF vehicle:**
Partially inflate the tube and insert it into the tire casing with the valve located near the valve hole in the rim. Attach a valve retrieval tool to the valve and thread the tool through the valve hole.
NOTE: You may want to use a block to raise the tire to make it easier to insert the tube.
5. Starting opposite the valve, use the tire irons to lift the outer bead up and over the rim flange, then down into the rim well. Be careful not to pinch the tube.
If OFF vehicle, locking pliers may be used to prevent tire slipping off the back of the rim.
6. Centering of the tire and rim assembly is extremely important to prevent broken beads.
If ON vehicle, with the valve stem at the bottom, lower the jack until the tire is centered on the rim.
7. Place a tire cage or other approved restraining devices over the rim and tire. Using an extension hose with an in-line air gauge and clip-on chuck (with valve core removed), inflate the tire to seat the beads.

 **NEVER inflate over the maximum psi as indicated on each tire or the manufacturer's guidance. When seating tire beads, NEVER exceed the maximum psi for the tire or 35 psi for single piece rim.**


Check for concentric centering of tire on rim. For tubeless tires, successful mounting depends on how well the shape of the tire has been maintained. If the beads are in or near their molded position, they can be seated by inflating the tire, through the valve. Where the beads have been squeezed together, the use of an inflator ring (either horizontally or vertically) will be required to provide a seal between the tire bead and rim.

If assembly is incorrect, – STOP – DEFLATE – CORRECT THE ASSEMBLY – repeat procedure.
8. If ON vehicle: raise vehicle and rotate wheel assembly so valve at the top (12 o'clock position). If the tire is tube-type, completely deflate by removing the valve core housing to remove buckles and uneven stresses from the tube and flap before re-inflation.
9. If assembly is correct, re-insert the valve core (for tube-type tires) and continue to inflate to recommended pressure
10. Remove tire cage or other approved restraining devices.

4. Three Piece Rims

4.1 Terminology

1. Rim Size (Nominal Bead Seat Diameter)
2. Rim Width
3. Rim Inside Dia.
4. Bead Seat Area
5. Flange-Fixed
6. Flange Height
7. Valve Hole (Location and size can vary)
8. Flange-Removable (Side Ring)
9. Lock Ring
10. O-Ring (For tubeless application only)
11. 28° Mounting Bevel (utilized for demountable application only)
12. Rim Stop Plate (Used for demountable application only; size, shape and location can vary.)
13. O-Ring Groove
14. Lock Ring Groove
15. Gutter Portion of Rim

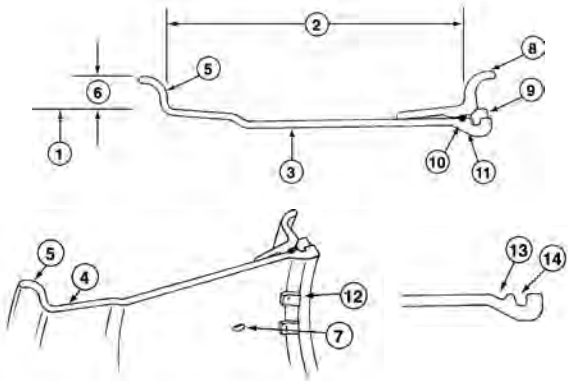

4.2 Demounting

Tools Required

One (1) straight tire iron, two (2) gooseneck tire irons, hydraulic bead unseating tool, diluted tire lubricant, wire and valve core removal tool.

1.	If OFF vehicle: place the assembly on block on the floor with loose side flange side up.
2.	Drive the goose-necked end of two gooseneck tire iron tools between the tire and side flange about five (5) inches apart.
3.	Pry both tools down and out. Leave one tool in position and place the second about five (5) inches away. Repeat in successive steps until the tire bead is completely unseated
4.	After the tire bead is unseated, stand on side flange and tire sidewall to depress the side flange down along the rim base. Pry the lock ring loose, starting at the split then remove the lock ring.
5.	Hold the side flange down with hooked end of gooseneck tire iron to remove the "O" ring from ring groove. Cut and discard the "O" ring and replace with a new "O" ring.
6.	Remove the side flange.
7.	Turn tire and rim over and unseat second bead by inserting both gooseneck tire iron tools between tire and fixed rim flange as in step 3. Repeat steps 2 and 3 until the tire bead is completely broken loose from the rim on the fixed flange side. Lift rim base out of tire.

4.3 Mounting



To prevent **SERIOUS INJURY** or **DEATH**:

- **ALWAYS** check the tire matches the rim diameter designation. **NEVER** mount a tire that is too large or too small for the rim. Rims of different diameters and tapers **CANNOT** be interchanged..
- **ALWAYS** remove water and foreign material from tire.
- **INSPECT** rim for damage, pitting from corrosion, cracks or if bent out of shape. If damage is found, **DO NOT** use. Mark or tag as unserviceable and remove from service area.
- **INSPECT** tubes and tires for excessive wear, cracks, tears, punctures, blisters, or other damage. **DO NOT** use if damage is found and replace with good tube or tire.

Tools Required

Two tire irons (36" if ON vehicle or 18" if OFF vehicle), diluted tire lubricant, wire brush, locking pliers, rubber mallet, valve retrieval tool (tube-type tires), extension hose with in-line gauge and clip-on air chuck, air/water inflation gauge, tire cage or other approved restraining devices.



1.	Use a wire brush to clean the rim base and all components thoroughly. Clean all dirt and rust from inter-locking faces of multi-piece rim components, particularly the gutter sections that hold the lock ring and "O" ring in place.
2.	Inspect rim base and wheel components for cracks, wear, corrosion and damage. <ul style="list-style-type: none"> • If damage is found, DO NOT use. Mark or tag as unserviceable and remove from service area. • Inspect all wheel components to verify the components meet the manufacturer's standards. • Replace any cracked, badly worn, damaged and severely rusted parts and rims. • Do not attempt to rework, weld, heat, or braze any rim base or wheel components under any circumstances. <p>Verify the replacement parts are the correct size, type and manufacturer for the wheel to be assembled.</p>
3.	Coat the rim with paint or a rust inhibitor if necessary. Follow procedures and safety precautions of the paint manufacturer.
4.	Inspect tire for wear, cracks, tears, punctures and other damage. Tires with excessive or uneven wear, cracks, tears, punctures, blisters or other damage may explode during inflation or service. <ul style="list-style-type: none"> • If damage is found, DO NOT use. Mark or tag as unserviceable and remove from service area. Tire should be destroyed and replaced with good tire of correct size, type and manufacturer for assembly, machine, and application. • If concerned about the condition of the rim base, wheel components, or tire - STOP - contact the manufacturer or distributor for assistance.
5.	Install valve on rim. Follow valve manufacturer's recommendations and installation instructions.
6.	If OFF vehicle: place rim base on blocks with fixed flange side down. Lubricate both bead seats with diluted tire lubricant. Place tire over rim base.
7.	Double check the parts and rim base are all compatible. Place side flange over rim base and push straight down with hands as far as possible. Make sure side flange does not bind on rim base.


CONTINUES ON NEXT PAGE

8. Lubricate a new rubber "O" ring. Place "O" ring in groove on one side. Stretch "O" ring and snap it into place. DO NOT roll "O" ring into place.
Lubricate the entire "O" ring area.
For 20" bead diameter and larger or flat base rims, ONLY use water to lube the bead and rim flange areas.
NOTE: You may need to hold the side flange down with the flat end of a gooseneck tire iron to expose the "O" ring groove.
 9. Stand on side flange to position it below both grooves in the rim base and snap lock ring into lock ring (upper) groove. Check lock ring is installed with the correct side facing you.
 10. Check components are correctly assembled and lock ring is fully seated in gutter.
When a driver key is used, make sure the gap in the lock ring is at least 6" away from the driver key.
 11. Place rim and tire in a tire cage or other approved restraining devices during tire inflation. Use a clip-on chuck with an in-line pressure gauge and enough hose so you can stay away from the potential trajectory danger zone.


WITH VALVE CORE REMOVED: Inflate to approximately 3 psi and check for proper engagement of all components.

If assembly is correct, install valve core and inflate to recommended pressure.

If assembly is incorrect, STOP – DEFLATE – CORRECT THE ASSEMBLY – AND REPEAT PROCEDURE.
- 
-  **Never attempt to align or seat side flange, lock ring or other components by inflation, hammering, welding, heating or brazing.**


 **Never inflate beyond manufacturer's recommended tire pressure.**
12. Remove tire cage or other approved restraining devices.

16. Knurl (Located on Back Flange Portion of Rim Base and Bead Seat Band tire mating surfaces)
17. Lock Ring Groove (size and shape can vary depending on style of lock ring)
18. Pry Bar Pocket [not shown] (continuous gap entire circumference on some items)

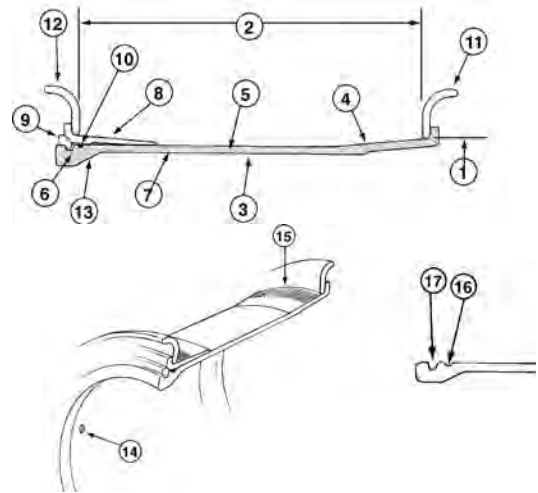


Crimped on Style Driver

1. Lock Ring
2. Crimped on driver
3. Notch in gutter portion of rim
4. Notch in bead seat band




Loose Style Driver

1. Gutter Portion of Rim Base
2. 28° Mounting Bevel
3. Rim Stop Plates (location, style and size can vary)



Demountable Type Rims

1. Driver Pocket (welded on gutter portion of rim base)
2. Driver Pocket (welded on bead seat band)
3. Driver Key – See Outboard Driver Keys.




5. Five Piece Rims

5.1 Terminology

1. Rim Size (Bead Seat Diameter)
2. Rim Width
3. Rim Inside Dia.
4. Back Flange Portion of Rim Base
5. Center Band Portion of Rim Base
6. Gutter Band Portion of Rim Base
7. Rim Base (Entire Shaded Area)
8. Bead Seat Band (Removable, Gutter Side only)
9. Lock Ring
10. O-Ring
11. Flange, Inner (Removable)
12. Flange, Outer (Removable) *Note: Inner and Outer Flanges are identical
13. 28° Mounting Bevel (Utilized for demountable application only)
14. Valve Hole (Location, size and configuration can vary)
15. O-Ring Groove

Valve Hole Styles

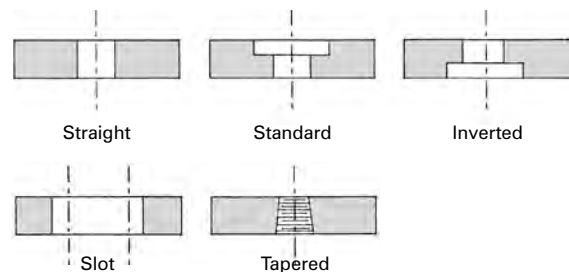

5.1.1 Driver Keys

Driver Keys are used on rims in high torque and/or low inflation pressure applications to help prevent circumferential movement of the rim components. Look for an "M" or "L" near the end of the style designation (part number).

	<p>The DR31C driver key is used on rim bases with 1.0" and 1.3" approximate thickness gutter sections; basic styles STM, HTM, HTHM and HTHL.</p>
	<p>The DR31E driver key is used on rim bases with the 1.8" approximate thickness gutter section; basic style HTEL.</p>

<p>1. Align driver pockets in bead seat band and base.</p>	<p>2. Inset driver key into driver pocket on base.</p>
<p>3. Make certain all parts are aligned properly, as shown, before inflation.</p>	<p>4. The bead seat band and pocket will move out and lock the driver key during inflation.</p>

5.1.2 Titan "W" Series Rims

ALWAYS check part numbers carefully before rim assembly. Titan's "W" series lock rings are NOT INTERCHANGEABLE with other types.

<p>Correct Assembly:</p> <p>"W" style lock ring with grooves assembled with "W" style rim base.</p>	<p>Examples of Improper Assembly:</p> <p>DO NOT USE a "W" lock ring with old rim base or an older lock ring with "W" style rim base. Both will have poor fit and a gap between lock ring and gutter.</p> <p>ALWAYS reassemble using proper components.</p>
--	---

<p>"W" Style Lock Ring</p> <p>A "W" appears after the part number, which is stamped on the 45 degree face near the lock ring split (e.g. LR49W for a 49" rim). A circumferential groove gives the ring a unique appearance. This lock ring can only be used with the new "W" style gutters.</p>	<p>"W" Style Rim Base</p> <p>There are two types of rim bases: older versions contain a "T" in the part number and newer versions contain a "W." A caution is stamped on the faces of the "W" style rim base to only use with a "W" style lock ring.</p> <table border="0"> <tr> <td>OLD</td> <td>NEW</td> </tr> <tr> <td>B1735HTHGD</td> <td>B1735RWHGD</td> </tr> <tr> <td>B3239HTEL</td> <td>B3239RWEL</td> </tr> </table>	OLD	NEW	B1735HTHGD	B1735RWHGD	B3239HTEL	B3239RWEL
OLD	NEW						
B1735HTHGD	B1735RWHGD						
B3239HTEL	B3239RWEL						

Bead Seat Bands

There are two types of bead seat bands: older versions contain an "H" in the part number and newer versions contain an "R." The R and H Bead Seats are interchangeable.

OLD	NEW
BB49HTG	BB49RTG
BB39HTL	BB28RTL

5.2 Demounting

Tools Required

If ON vehicle: Lifting device or boom truck, hydraulic bead unseating tool, gooseneck tire iron, straight tire iron, wire and valve core removal tool.

If OFF vehicle: Hydraulic bead unseating tool, two (2) straight tire irons, valve core removal tool, wire and a screwdriver.

If ON vehicle		If OFF vehicle	
1.	Jack, crib and block the vehicle/equipment per the manufacturer's instructions.	1.	Place the assembly gutter side up on blocks.

CONTINUES ON NEXT PAGE

If ON vehicle	If OFF vehicle
2. Always completely deflate tire (and both tires of a dual assembly) by removing valve core(s) from valve(s). Check the valve stem by running a piece of wire through the stem to make sure it is not plugged.	2. Always completely deflate tire by removing valve core from valve. Check the valve stem by running a piece of wire through the stem to make sure it is not plugged.
3. Place the hook of the hydraulic demounting tool into one of the pry bar pockets. A continuous lip is provided on some bases. Adjust the ram adjusting screw to enable the tool to be perpendicular to the wheel when under pressure.	3. Remove the lock ring, using two tire irons. NOTE: If this is not possible, the tire bead may be unseated as shown in step 4 with the lock ring and "O" ring in place. These items must be removed before removal of bead seat bands and flanges in step 7.
4. Apply pressure and depress the flange about 3/4." If necessary, release the pressure to readjust the tool. Place the end of the gooseneck tire iron between the flange and the lip of the bead seat band and release the pressure. Then place the hook of the hydraulic demounting tool under the lip of the bead seat band and continue the procedure around the rim; then slowly apply pressure until the tire bead is COMPLETELY unseated.	4. Remove the "O" ring by prying the bead seat band back and inserting a pry bar or screwdriver under the "O" ring and pulling it from the groove. ALWAYS cut and discard the "O" ring and replace with a new "O" ring.
5. Remove Driver Key if present – see Driver Key	5. Place hook of the hydraulic demounting tool into one of the pry bar pockets. A continuous lip is provided on some bases. Adjust the ram adjusting screw to enable the tool to remain vertical when under pressure. In some cases, the pressure foot may have to be removed to ensure a good hold. If necessary, release pressure and readjust the ram adjusting screw. Depress flange about 1/2"-3/4" and place a nut or similar object between the flange and the lip of the bead seat band by laying it on the rim flange and sliding it into position with a screwdriver.
6. Remove the lock ring with a pry bar, starting near the split and working around the ring.	6. Release the pressure and move about 2 feet around the rim or to the next pocket for the second bite. Continue the procedure until the tire bead is unseated. Do not use tool in the vicinity of the butt weld area of the bead seat band, the flanges, or rim base.

If ON vehicle	If OFF vehicle
7. Remove the "O" ring by prying the bead seat band back and inserting a pry bar or screwdriver under the "O" ring and pulling it from the groove. ALWAYS cut and discard the "O" ring and replace with a new "O" ring.	7. Remove bead seat band using hoist or pry bars.
8. Use a gooseneck tire iron under the flange to pry the bead seat band loose, with assistance of lifting device, carefully lower the bead seat band to the ground and roll it out of the way.	8. Remove outer flange using a hoist or pry bars.
9. With assistance or a lifting device, remove the outer flange, then carefully lower it to the ground and roll it out of the way.	9. Turn assembly over and repeat tire bead unseating procedure on the backside. (Steps 4 & 5)
10. To unseat the inner tire bead, use either the hydraulic demounting tool as used on the outer bead or a shorty ram between the frame of the vehicle and the back flange.	10. Lift rim base from tire using hoist.
11. Remove the tire using a boom truck and sling or a tire handler. Remove the inner flange to complete the disassembly.	11. Remove inner flange. NOTE: You may want to use a more powerful hydraulic demounting tool with a longer stroke. Use caution to avoid bending the flange or breaking the butt weld. Follow procedure outlined in step 5.

5.3 Mounting



To prevent **SERIOUS INJURY** or **DEATH**:


- **ALWAYS** check the tire matches the rim diameter designation. **NEVER** mount a tire that is too large or too small for the rim. Rims of different diameters and tapers **CANNOT** be interchanged.
- **ALWAYS** remove water and foreign material from tire.
- **INSPECT** rim for damage, pitting from corrosion, cracks or if bent out of shape. If damage is found, **DO NOT** use. Mark or tag as unserviceable and remove from service area.


Tools Required

Lifting device or boom truck, One (1) straight tire iron, two (2) gooseneck tire irons, approved tire lubricant, rubber mallet, extension hose with in-line gauge and clip-on air chuck, air/water inflation gauge, tire cage or other approved restraining devices.

1.	Use a wire brush to clean the rim base and all components thoroughly. Clean all dirt and rust from inter-locking faces of multi-piece rim components, particularly the gutter sections that hold the lock ring and "O" ring in place.
----	---

CONTINUES ON NEXT PAGE

2.	<p>Inspect rim base and wheel components for cracks, wear, corrosion and damage.</p>  <ul style="list-style-type: none"> • If damage is found, DO NOT use. Mark or tag as unserviceable and remove from service area. • Inspect all wheel components to verify the components meet the manufacturer's standards. • Replace any cracked, badly worn, damaged and severely rusted parts and rims. • Do not attempt to rework, weld, heat, or braze any rim base or wheel components under any circumstances. <p>Verify the replacement parts are the correct size, type and manufacturer for the wheel to be assembled.</p>
----	--

If ON vehicle	If OFF vehicle
3. Position the outer flange on the rim base with the help of the boom.	3. Place rim base on blocks (4" to 6" high) on floor, gutter side up. Place inner flange on rim base and lubricate tire beads. Place tire on rim using tire handler or hoist with sling.
4. Place the bead seat band on the rim base with the help of the boom. Be sure driver pocket on bead seat band lines up with pocket on rim base.	4. Depress the tire so the lower tire bead is driven onto the back 5° Bead Seat taper on the rim. This will expose more of the gutter at the upper side of the rim base.
5. Use the boom to hold the rim components out of the way. Place a new, lubricated "O" ring into the "O" ring groove, then lubricate the entire "O" ring area with diluted tire lubricant. Snap "O" ring into place by placing in groove on one side, stretching like rubber band and seating on opposite side.	5. Place the outer flange over the rim base on the tire.
6. Start the lock ring in the lock ring groove and push or walk it into place. When a driver key is used, make sure the gap in the lock ring is at least 6" away from the driver key.	<p>6. Place the bead seat band on the rim base. If present, driver pockets must be aligned. Due to limited clearance between bead seats and rim base, bead seat band will bind if cocked slightly. Band should slide freely over base.</p>  <p>DO NOT hammer bead seat band into place!</p> <p>If necessary, remove and re-install, or use mallet to tap, lightly upward on the bead seat band to seat properly.</p>
7. Check components (lock rings, bead seat and flanges) to make sure the parts are correctly assembled. NOTE: Lock rings should be fully seated in gutter around the circumference. Insert Driver Key – see Driver Key section.	7. Place a new, lubricated "O" ring into the "O" ring groove, then lubricate the entire "O" ring area with diluted tire lubricant. Snap "O" ring into place by placing in groove on one side, stretching like rubber band and seating on opposite side.

If ON vehicle	If OFF vehicle
	8. Start the lock ring in the lock ring groove and push or walk it into place. When a driver key is used, make sure the gap in the lock ring is at least 6" away from the driver key.
	9. Insert Driver Key as required in pockets.

For ON and OFF vehicle

Place rim and tire in a tire cage or other approved restraining devices during tire inflation. Use a clip-on chuck with an in-line pressure gauge and enough hose so you can stay away from the potential trajectory danger zone.

WITH VALVE CORE REMOVED: Inflate to approximately 3 psi and check for proper engagement of all components.

If assembly is correct, install valve core and inflate to recommended pressure.

If assembly is incorrect, STOP – DEFLATE – CORRECT THE ASSEMBLY – AND REPEAT PROCEDURE.




Never attempt to align or seat side flange, lock ring or other components by inflation, hammering, welding, heating or brazing.



Never inflate beyond manufacturer's recommended tire pressure.

Then remove tire cage or other approved restraining devices.

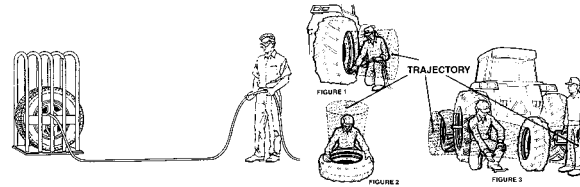

6. Additional Resources

Occupational Safety and Health Administration (OSHA), <https://www.osha.gov/>

- 29 CFR 1910.177, Servicing of Single Piece and Multi-Piece Rim Wheels
- Demounting and Mounting Procedures for Tube-type Truck and Bus Tires Chart – Tire Chart (OSHA 3402)
- Demounting and Mounting Procedures for Tubeless Truck and Bus Tires Chart – Tire Chart (OSHA 3401)
- Multi-Piece Rim Matching Chart – Tire Chart (OSHA 3403 - 2011)
- Servicing Multi-Piece and Single – Piece Rim Wheels 29 CFR 1910.177 Manual – Tire Chart (OSHA 3421 - 2014)

U.S. Tire Manufacturers Association, <https://www.ustires.org/publications>

- Care and Service of Commercial Truck and Bus Tires
- Demounting and Mounting Procedures for Passenger and Light Truck Tires Wall Chart

Tire Industry Association, <https://www.tireindustry.org>

- Basic Earthmover Tire Service (ETS) Training Kit
- Basic Farm Tire Service Training Kit
- OTR Tire Mount/Demount Training Program



➤ **TITAN MOVES THE WORLD.®**



1 (800) 872-2327 | www.titan-intl.com/

TITAN MOVES THE WORLD®
070T01EN122022 © 2022 Titan International, Inc. All trademarks are owned by Titan International, Inc. other than the trademark GOODYEAR and the winged foot logo, which are owned by The Goodyear Tire & Rubber Company. Materials and specifications are subject to change without notice.