



Titan Ultimate

- Extra long life with up to twice the tread depth of conventional skid steer tires.
- Superior damage resistance due to extra heavy sidewall and large rim guard.
- Superior traction from high void-to-lug ratio.
- Lowest possible cost per hour delivered by specialty compound and industry leading tread depth.

Size	Catalog Number	Ply Rating	Max Load	PSI	Tread Depth 32nd in.
10-16.5NHS	49U3D1	8	4,140	60	42
12-16.5NHS	49U3J7	10	5,600	65	44



Titan H/E

- Superior damage resistance due to extra heavy sidewall and large rim guard.
- Exceptional tread life resulting from low void-to-tread ratio.
- Lowest possible cost per hour delivered by specialty compound and industry leading tread depth.

Size	Catalog Number	Ply Rating	Max Load	PSI	Tread Depth 32nd in.
10-16.5NHS	43H3R8	10	4,710	75*	44
12-16.5NHS	43H34R	14	6,780	90*	44
33x15.50-16.5	43H3X3	12	6,835	60	44
14-17.5	43H384	14	8,540	80	47

Comparison

Titan HD2000 vs. Advance Skid Master

Size: 10-16.5	Advance CHINA	Titan USA	The Titan Advantage
Country of Manufacture			
Rim Guard	5/32"	12/32" (+59%)	Superior wheel protection
Under Tread	5/32"	8/32" (+38%)	Increased puncture resistance
Sidewall Gauge	3/32"	8/32" (+63%)	Superior puncture resistance, sidewall durability
Bead Bundle	49 wires	56 wires (+13%)	Increased load capacity & shock resistance
Tread Hardness Durometer	69	74 (+7%)	Higher resistance to abrasion/wear
Tread Application	Cold Extruded	Hot Strip Wound	Superior field performance & durability
Weight	52#	60# (+14%)	Superior durability
Tread Depth @ C/L	17/32"	21/32" (+20%)	Longer tread life and superior traction
Tread Depth @ Mid Point	21/32"	26/32" (+25%)	Longer tread life and superior traction
Tread Depth @ Shoulder	21/32"	32/32" (+35%)	Longer tread life and superior traction


Titan Tire Customer Care

PHONE: **1.800.U.S.A.BEAR**
 FAX: 515.265.9301
 EMAIL: tire@titan-intl.com
 WEB: www.titan-intl.com

Titan Tire Corporation • Des Moines, Iowa

No tire works without the wheel – they are a total system.
 For all your wheel needs contact Titan Wheel Customer Care:
276.496.3107 or 217.221.4430

SST 0809B
 © 2009 Titan Tire Corporation. All Rights Reserved. Division of Titan International, Inc. TWI, Quincy, IL. Materials and specifications are subject to change without notice. Goodyear is a registered trademark of The Goodyear Tire & Rubber Company.

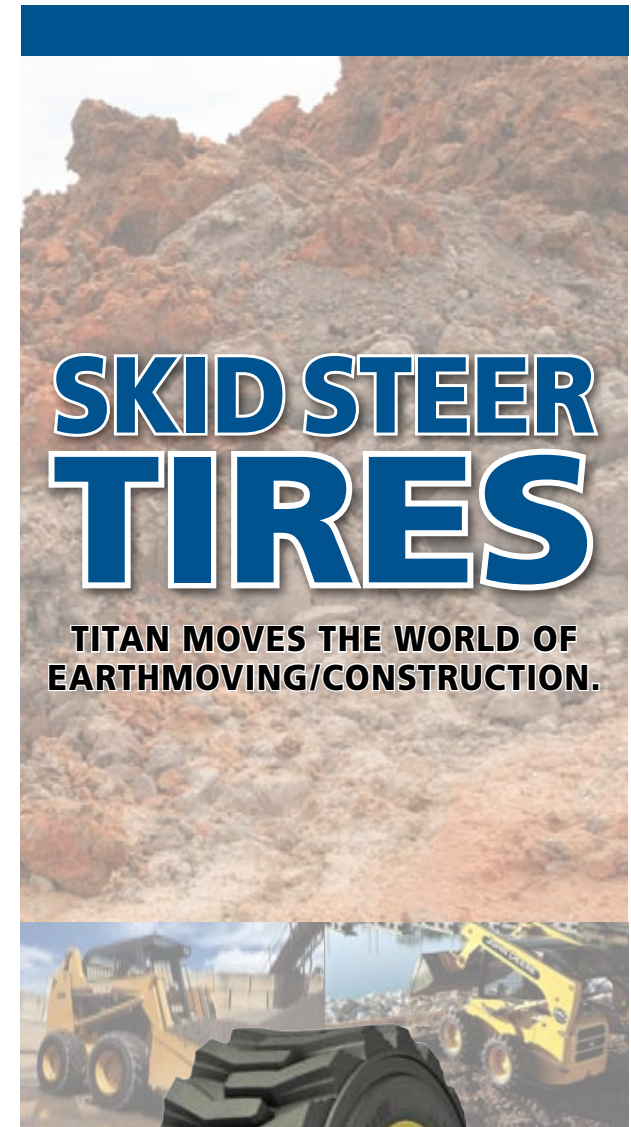

SKID STEER TIRES

TITAN MOVES THE WORLD OF EARTHMOVING/CONSTRUCTION.





Goodyear IT323 Skid Steer

- Long tread life from wear pad design.
- Improved damage resistance from heavy duty sidewall.

Size	Catalog Number	Ply Rating	Max Load	PSI	Tread Depth 32nd in.
23x8.50-12NHS	4323C3	4	1,470	35	16
27x8.50-15NHS	432339	6	2,480	45	18
27x10.50-15NHS	4233L6	4	2,085	30	20
27x10.50-15NHS	4323H7	6	2,610	45	20
31x15.50-15NHS	4323L8	8	4,480	35	25
10-16.5NHS	4323D1	8	4,140	60	25
12-16.5NHS	4323E8	8	4,810	50	26
12-16.5NHS	4323J7	10	5,600	65	26
14-17.5NHS	432396	10	6,850	55	28
15-19.5NHS	4323H9	8	7,250	40	26



Titan HD2000II Skid Steer

- Superior durability delivered by extra heavy duty construction and large rim guard.
- Superior puncture resistance resulting from heavy under tread and low void-to-lug ratio.

Size	Catalog Number	Ply Rating	Max Load	PSI	Tread Depth 32nd in.
20X8.00-10NHS	49E3W8	4	1,210	40	15
10-16.5NHS	49E3D1	8	4,140	60	24
12-16.5NHS	49E3J7	10	5,600	65	26
14-17.5	49E384	14	8,540	80	26
31X15.5-16.5NHS	49E3L8	8	4,480	35	24
33X15.5-16.5NHS	49E3X3	12	6,835	60	24
33X15.5-16.5NHS	49E3R9	14	7,480	70	24



Titan HD2000 Skid Steer

- Improved damage resistance from heavy duty sidewall.
- Improved penetration resistance from deep under tread.
- Longer tread life from shoulder-to-shoulder, full depth tread.

Size	Catalog Number	Ply Rating	Max Load	PSI	Tread Depth 32nd in.
10-16.5NHS	4393D1	8	4,140	60	21
12-16.5NHS	4393J7	10	5,600	65	23
14-17.5NHS	439396	10	6,850	55	24
14-17.5NHS	439384	14	8,540	80	24
15-19.5NHS	439336	12	9,190	60	26
15-19.5NHS	439636	16	11,270	85	26
23X8.50-12NHS	4393G8	6	1,810	50	14
27X8.50-15NHS	439377	8	2,890	60	15
27X10.50-15NHS	439378	8	3,100	60	15



Goodyear Sure Grip Lug

- Special tread compound resists tearing and cracking.
- Industry standard for backhoe front tires.

Size	Catalog Number	Ply Rating	Max Load	PSI	Tread Depth 32nd in.
25x8.50-14NHS	4GL371	6	1,640	32	18
27x8.50-15NHS	4GL339	6	2,480	45	18
27x10.50-15NHS	4GL3H7	6	2,610	45	18
10-16.5NHS	4GL3C8	C	3,500	45	21
12-16.5NHS	4GL3E8	D	4,810	50	23
12-16.5NHS	4GL3J7	E	5,600	65	23
14-17.5NHS	4GL396	10	5,610	65	23
15-19.5NHS	4GL336	12	9,190	60	26



Titan Trac Loader

- Application specific, designed for compact tractors and light duty skid steer use.

Size	Catalog Number	Ply Rating	Max Load	PSI	Tread Depth 32nd in.
26X12.00-12	412361	4	1,780	20	16
10-16.5NHS	4123C8	6	3,500	45	19
12-16.5NHS	4123C9	6	4,220	40	23
12-16.5NHS	4123D2	8	4,810	50	23
14-17.5NHS	412334	6	4,820	30	24
14-17.5NHS	412396	10	6,850	55	24
14-17.5NHS	412384	14	8,550	80	24
15-19.5NHS	412373	6	2,000	30	25
15-19.5NHS	41J373	6	6,130	30	25
15-19.5NHS	412336	12	9,190	60	25
23X8.50-12NHS	4123C3	4	1,470	35	14
23X8.50-12NHS	4123G8	6	1,810	50	14
23X8.50-14NHS	412388	4	1,490	35	14
25X8.50-14NHS	412379	6	2,000	50	17
27X8.50-15NHS	4123C6	4	1,940	30	17
27X8.50-15NHS	412339	6	2,480	45	17
27X10.50-15NHS	4123H7	6	2,610	45	17
27X12.50-15NHS	4122N7	4	2,340	25	17
28X8.50-15NHS	4123R3	6	2,880	45	17
33X14.5-16.5NHS	4123J9	8	4,690	40	23
43X16.00-20NHS	4123A5	4	4,540	20	26